



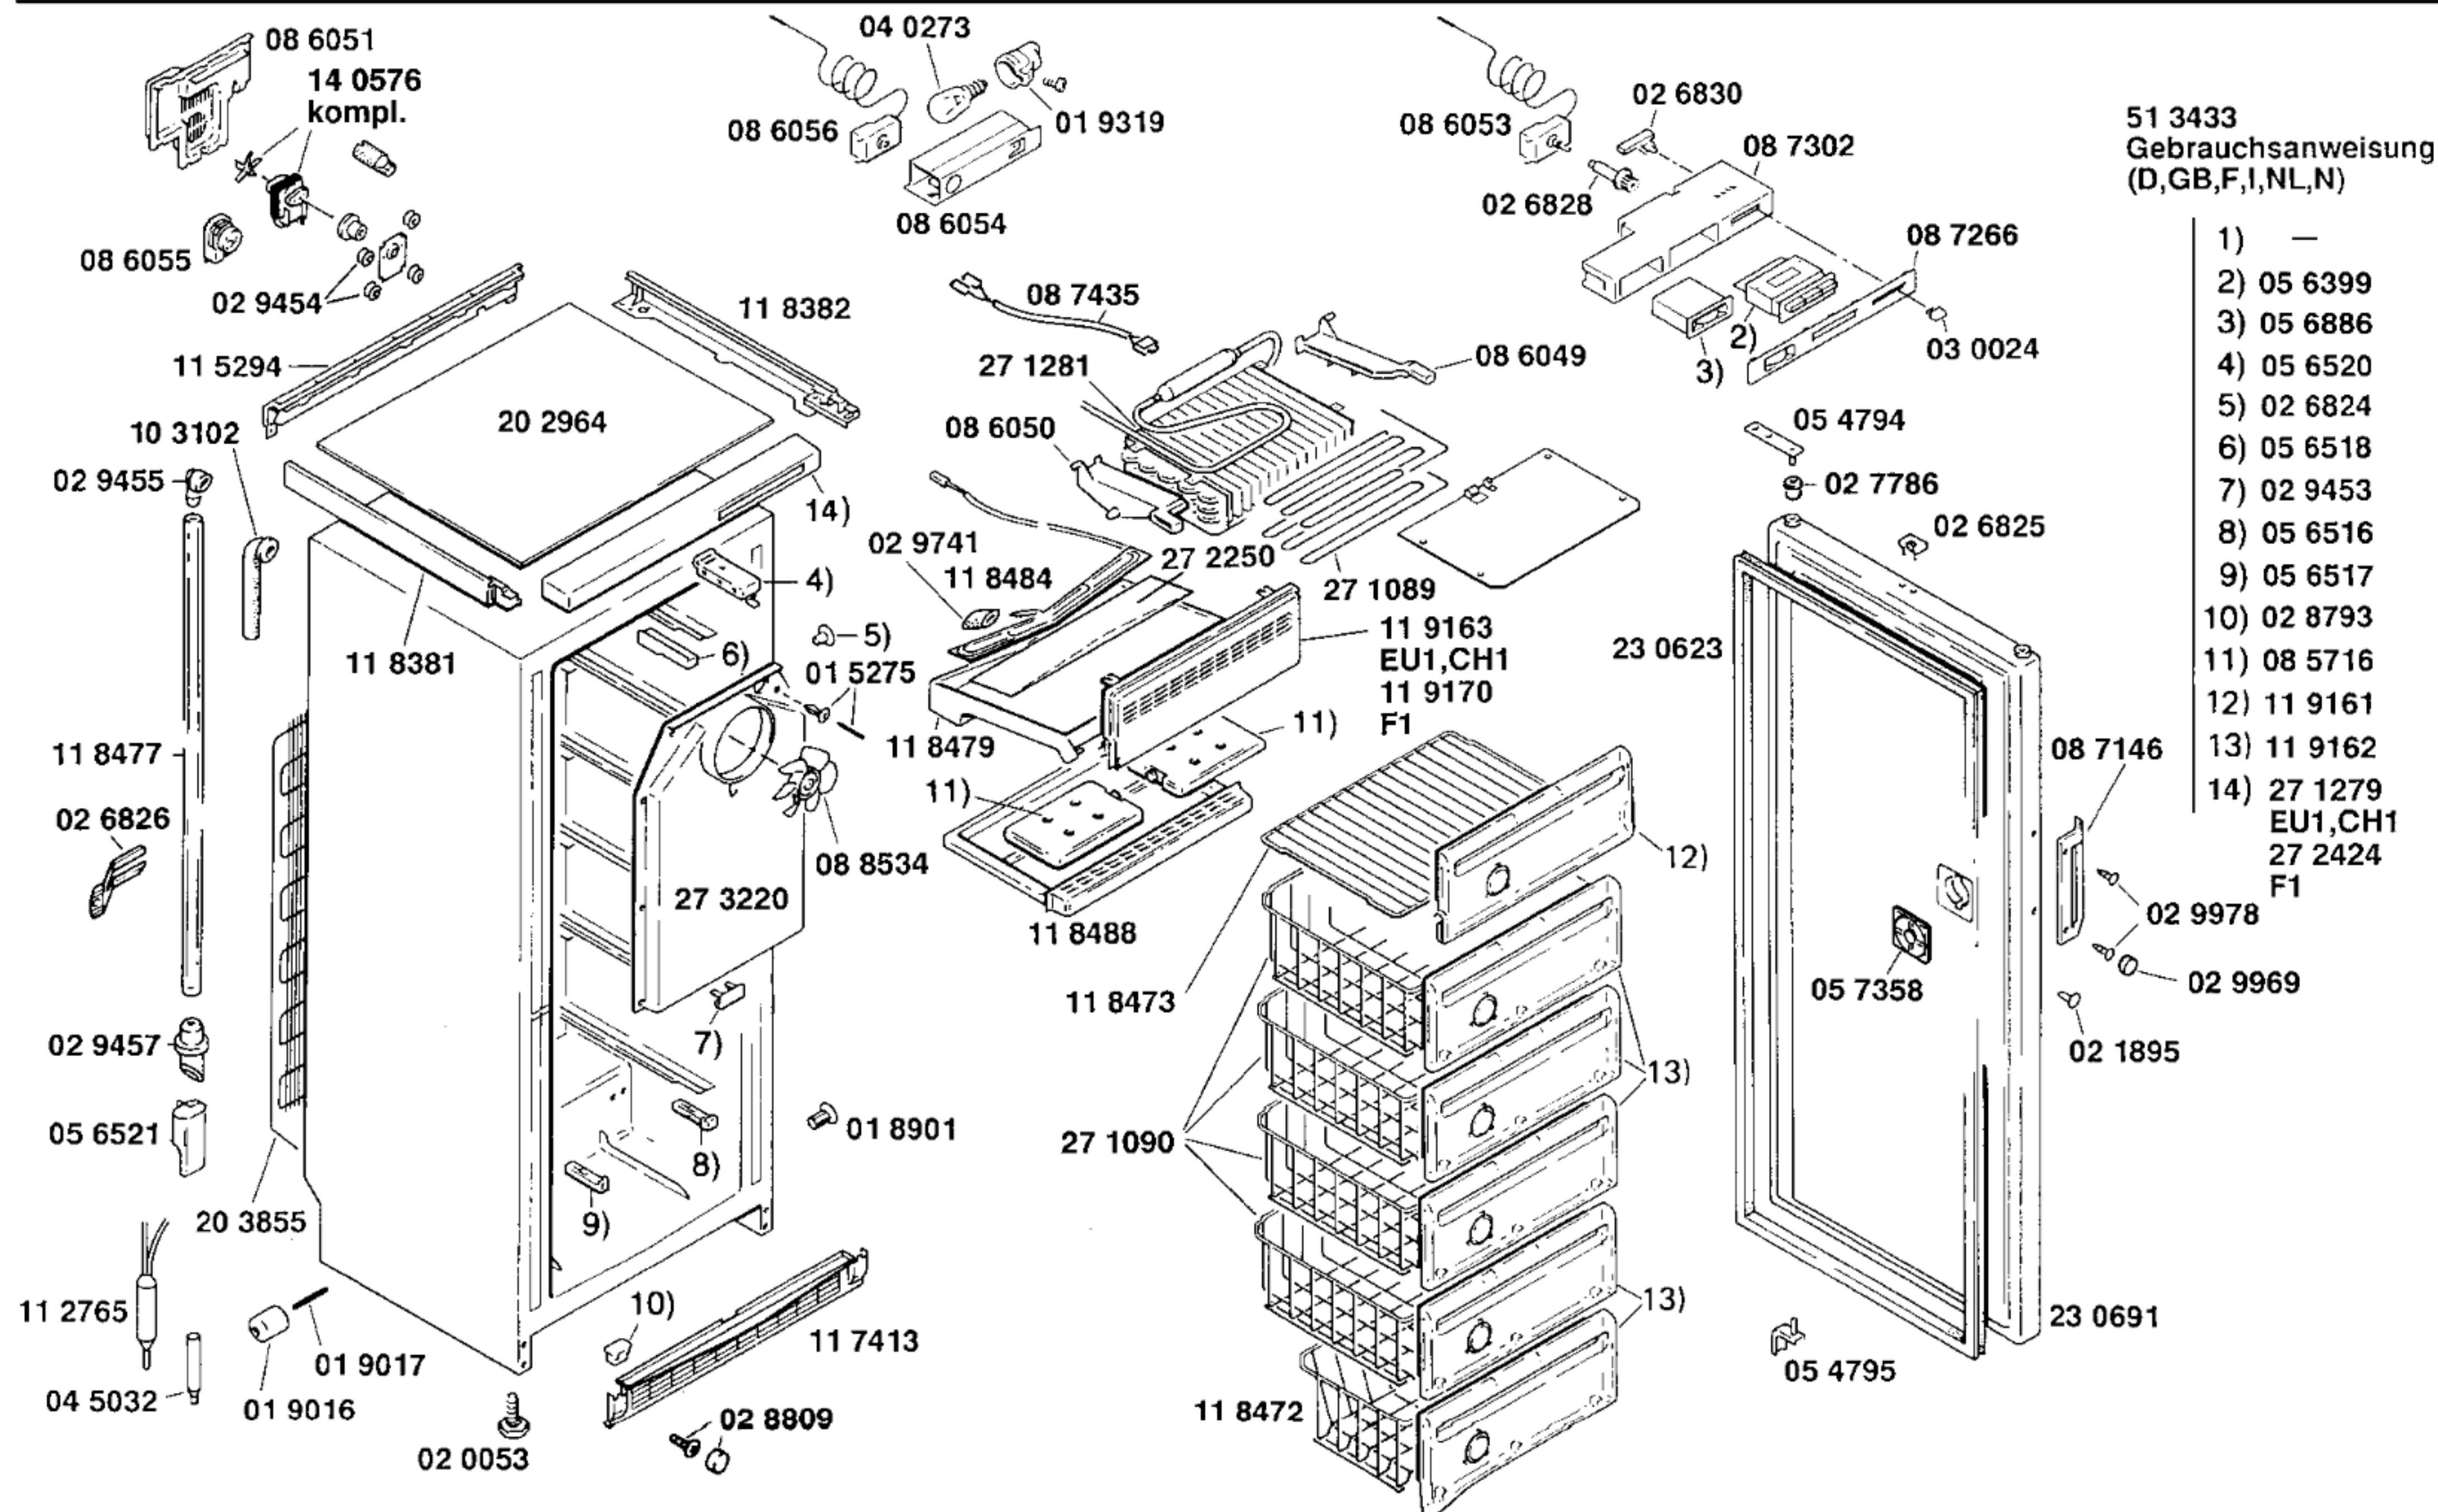

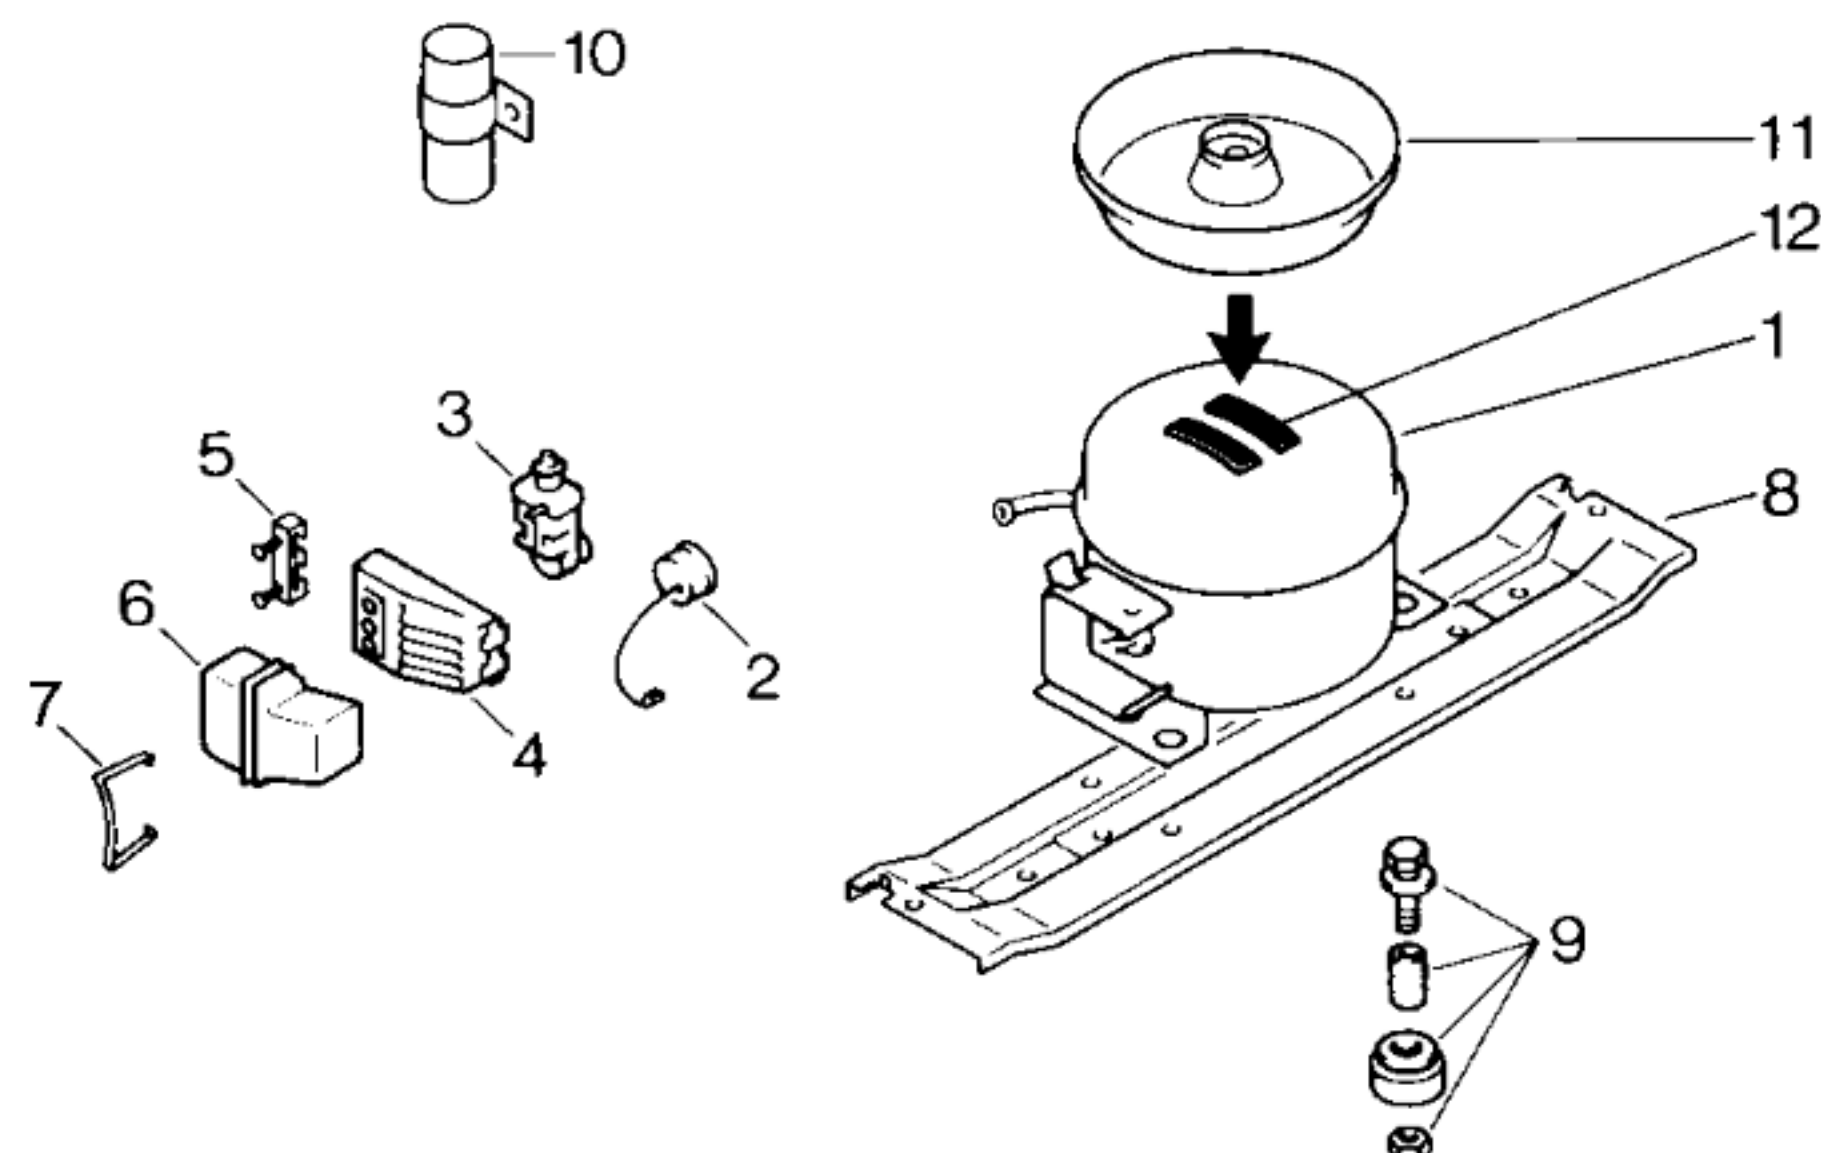

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita		
Typ/Type		D116LRAA		
Förderleistung/Delivery/Débit	l/h	1184		
Anlaufstrom/Starting current/Cour. de démarrage	A	8,75		
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	12,0		
	Hi/aux Ω	28,7		
Temp.-Regler/Thermostat		Danfoss		
Typ/Type		077BO/09IX4742		
Reglerstellung/Position		kalt	warm	Ranco
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	-26,9	-18	K 50 H 5658
Valeurs de commutation	„aus“	-33,5	-23	ein aus
(„abtauen“ od.)	„alarm“			-12 -15
Füllmenge/Fill.quantity/Charge	R12 g	220		
Anschlußwert/Conn.load/Puiss. connectée	W	150		
Heizung/Heater/Chauffage		Abtauheizung		
Widerstand/Resistance/Résistance	Ω	173		
Leistung/Power/Puissance	W	333		
Ventilator/Blower/Ventilateur		Rinnenheizung		
Widerstand/Resistance/Résistance	Ω	340		
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance	Ω	6500		

Pos.	EU1,CH1,F1	EU2,CH2,F2	
	Matsushita	Matsushita	
	D116LRAA-M20	D116LRAA-M26	
1	14 0563	14 0803	
2	05 8506	03 2748	
3			
4	05 5516	05 5516	
5			
6	05 8458	05 8458	
7	02 6731	02 6731	
8	27 3219	27 3219	
9	05 0166	05 0166	
10	05 8459	05 8459	
11	08 8535	08 8535	
12	05 6008	05 6008	