


**BOSCH**

GSD 2613/01-EU1  
 GSD 2613CH/01-CH1  
 GSD 2613DK/01-DK1  
 GSD 2613EE/01-E1

GSD 2613FF/01-F1  
 GSD 2633II/01-I1

GEFRIERGERÄTE  
 Gefrierschränke, Stand

Ident - Nummern - Konstante  
 3740 . . . . .

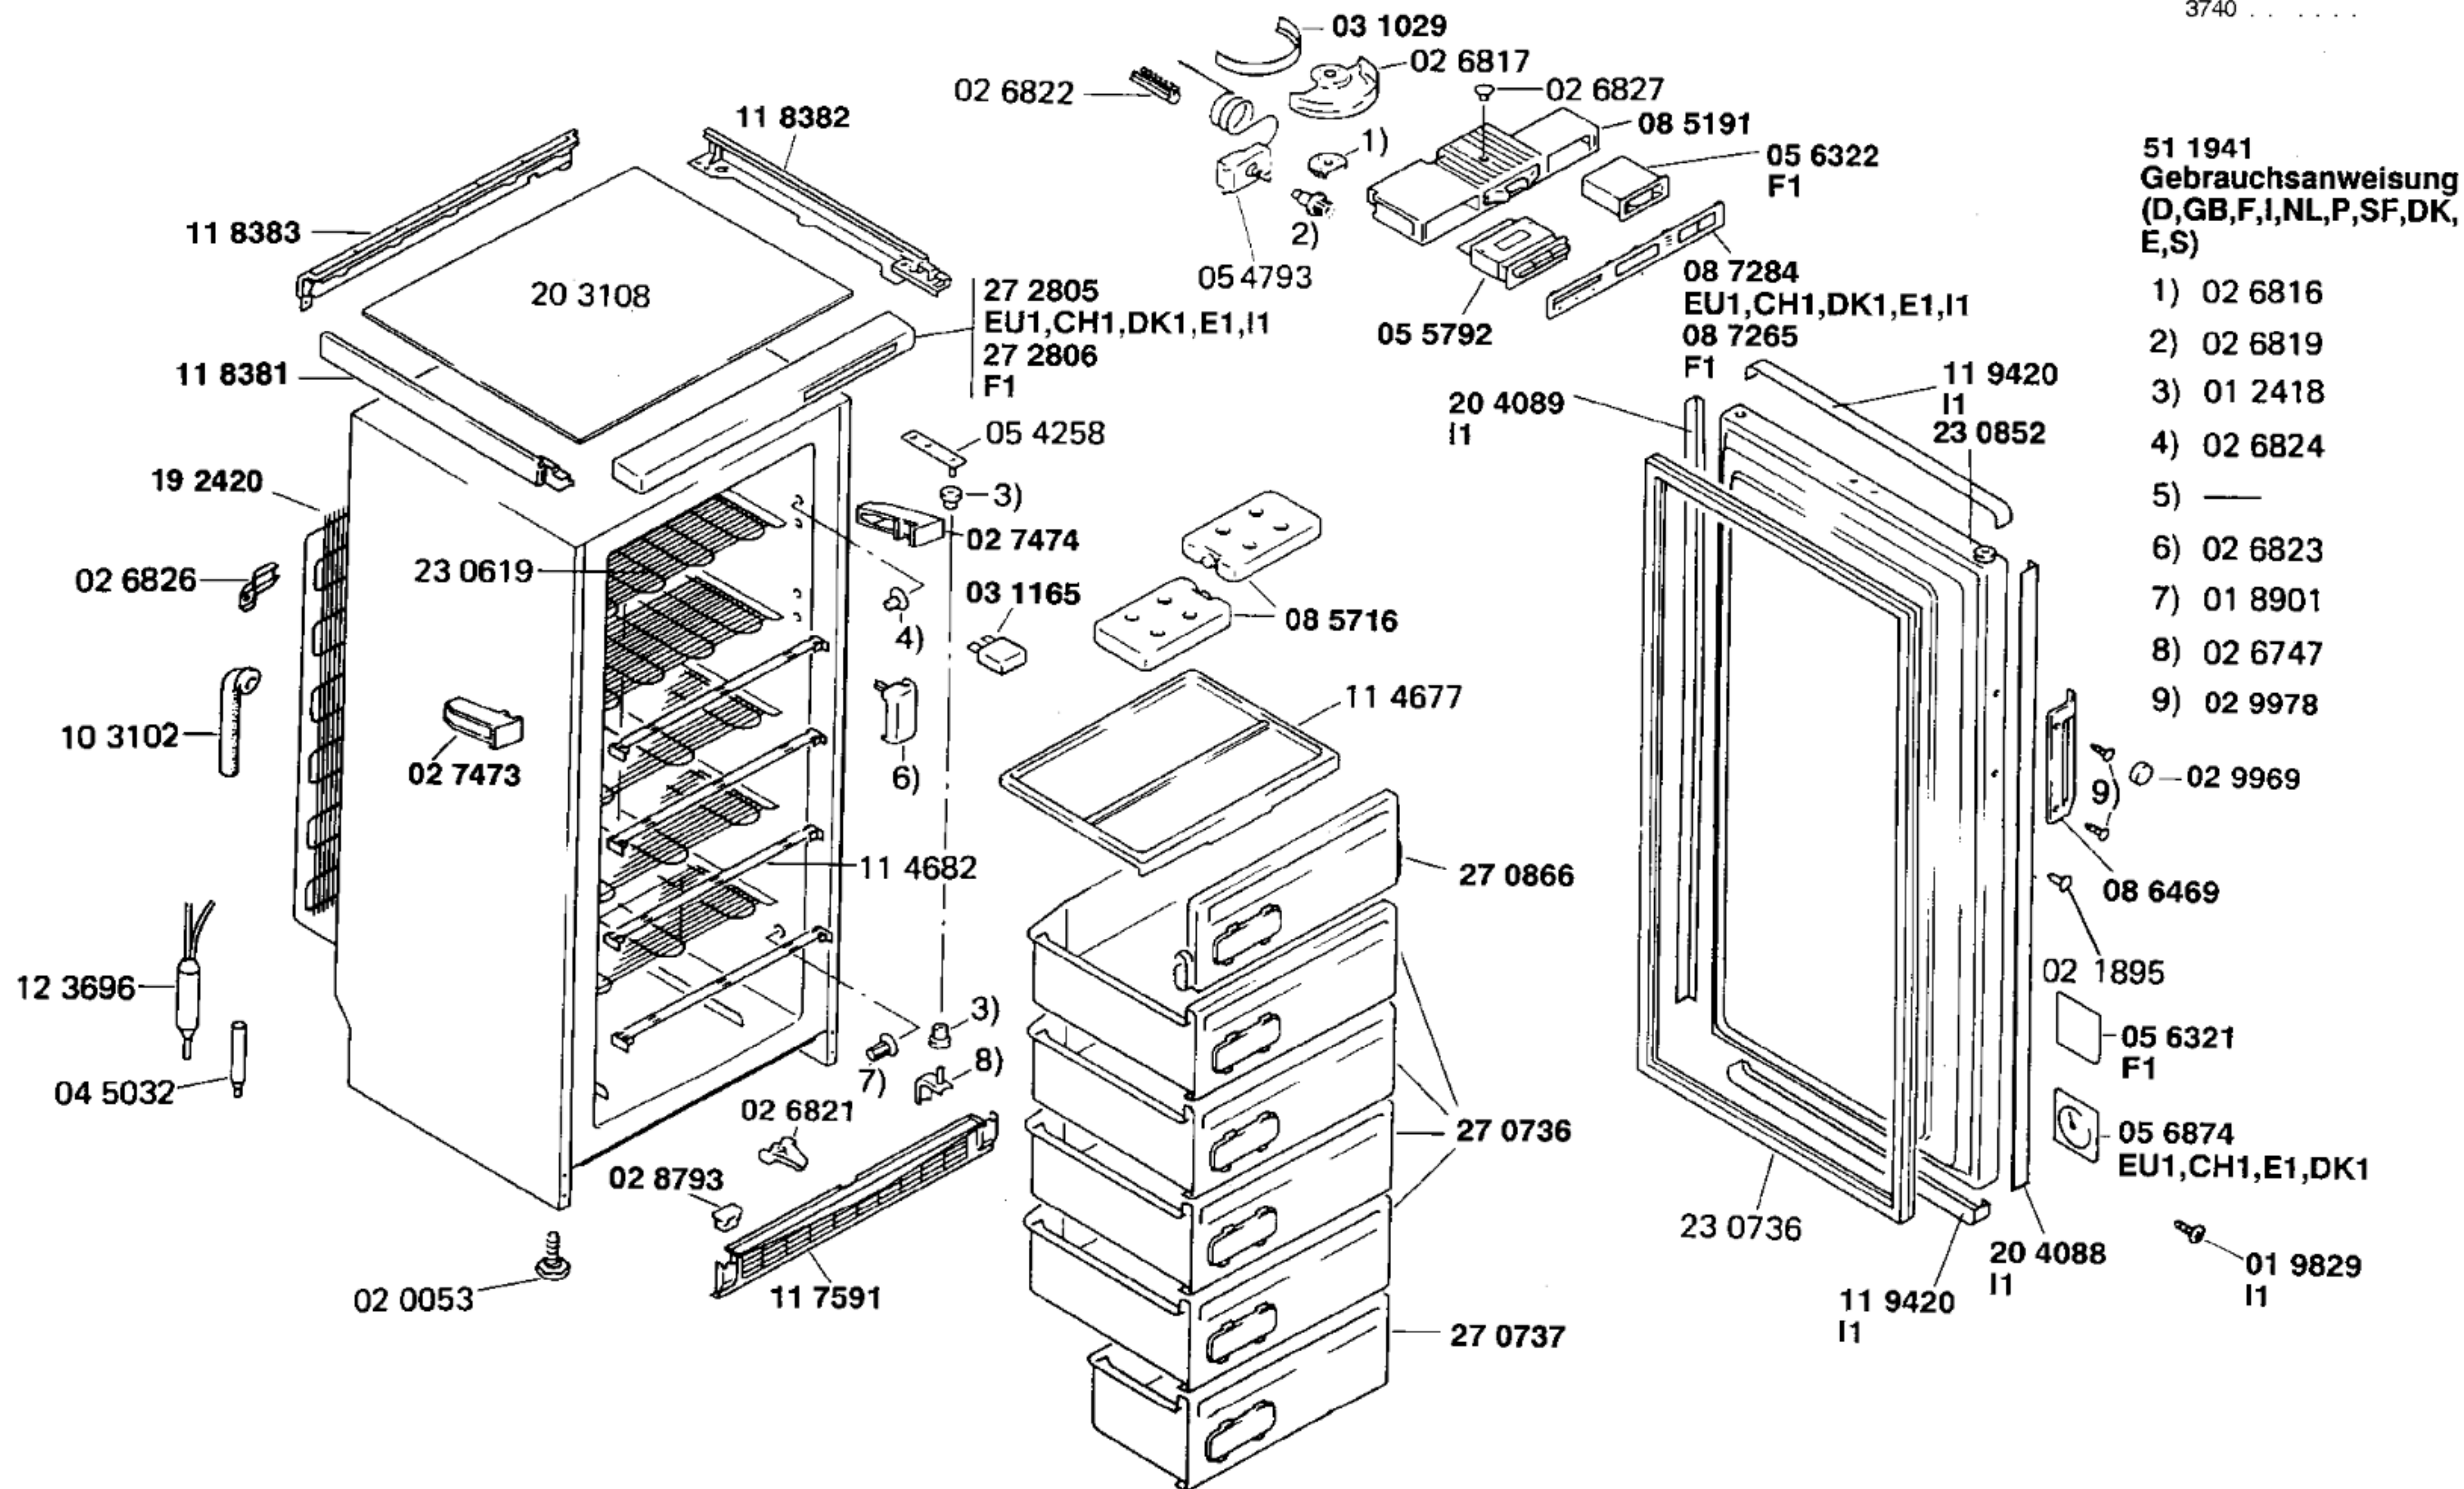


**BOSCH**

GSD 2613/01-EU1  
GSD 2613CH/01-CH1  
GSD 2613DK/01-DK1  
GSD 2613EE/01-E1

GSD 2613FF/01-F1  
GSD 2633II/01-I1

GEFRIERGERÄTE  
Gefrierschränke, Stand

Ident – Nummern – Konstante  
3740 . . . . .

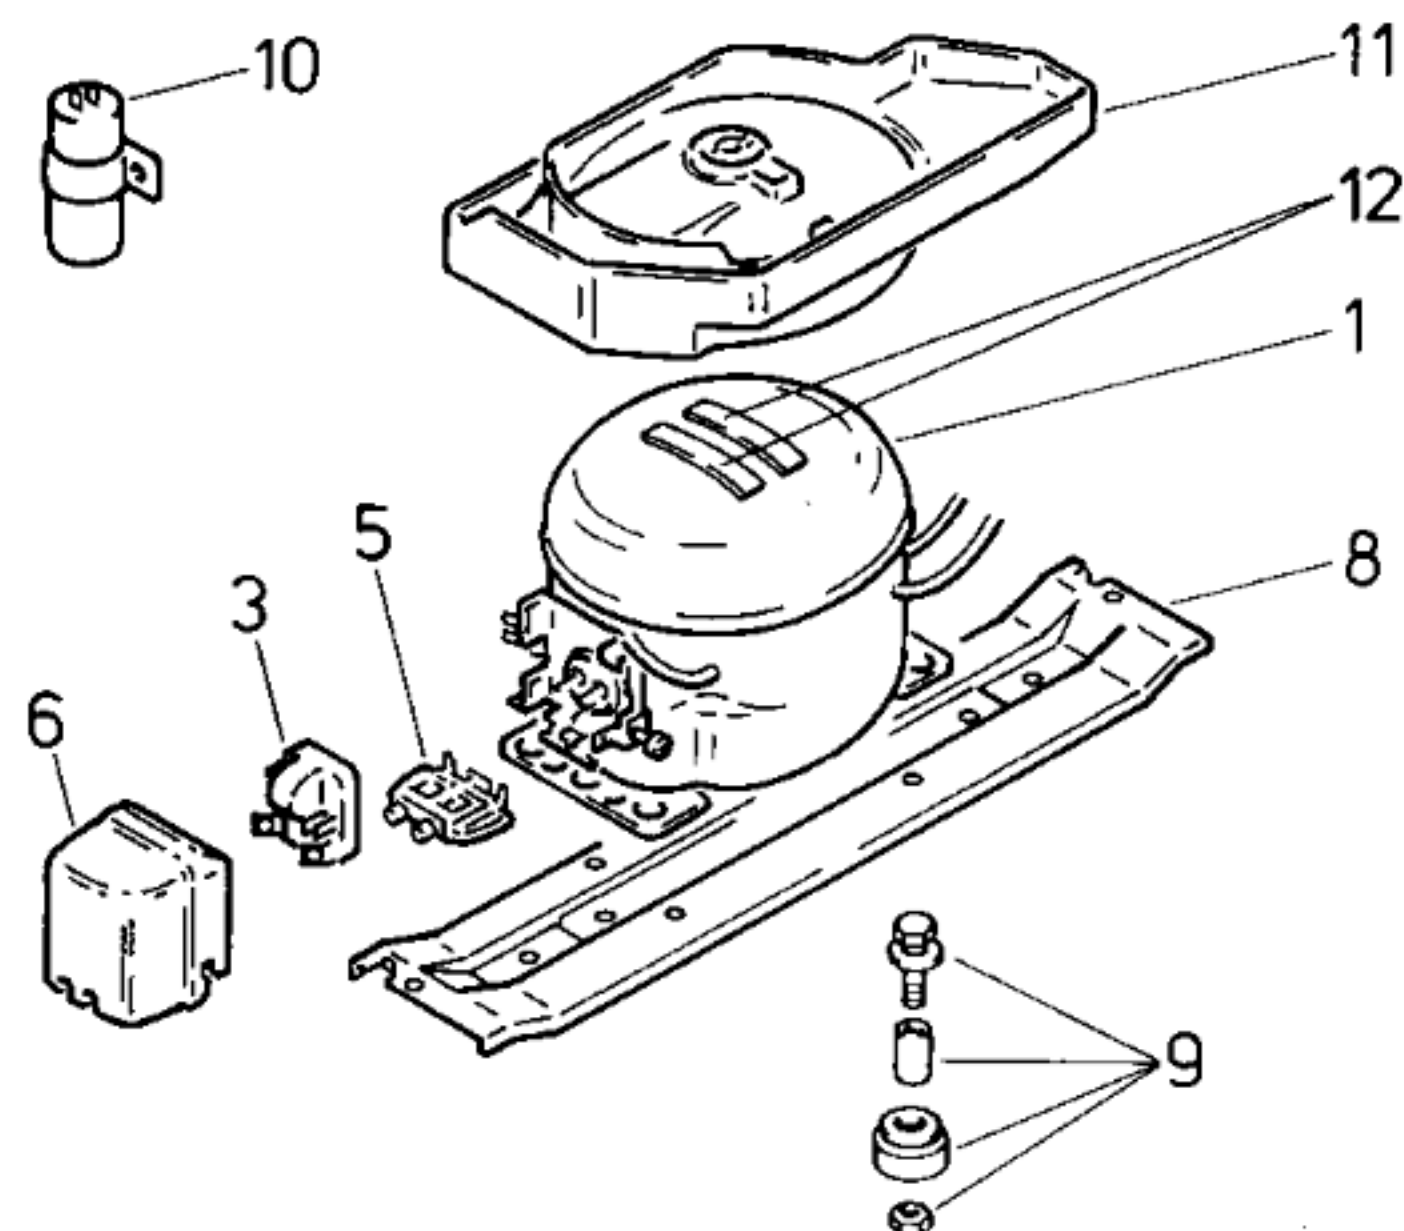

| Pos. | EU1,F1,CH1,E1,I1,DK1 |  |  |
|------|----------------------|--|--|
|      | Danfoss              |  |  |
|      | FR 8,5 A             |  |  |
| 1    | 14 0157              |  |  |
| 2    |                      |  |  |
| 3    | 02 0108              |  |  |
| 4    |                      |  |  |
| 5    | 021361               |  |  |
| 6    | 05 8458              |  |  |
| 7    |                      |  |  |
| 8    |                      |  |  |
| 9    | 05 0166              |  |  |
| 10   |                      |  |  |
| 11   |                      |  |  |
| 12   | 05 6008              |  |  |

**TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES**

|                                                 |                 |            |      |      |  |
|-------------------------------------------------|-----------------|------------|------|------|--|
| Verdichter/Compressor/Compresseur               |                 | Danfoss    |      |      |  |
| Typ/Type                                        |                 | FR 8,5 A   |      |      |  |
| Forderleistung/Delivery/Débit                   | l/h             | 1430       |      |      |  |
| Anlaufstrom/Starting current/Cour. de démarrage | A               | 10,3       |      |      |  |
| Widerstand/Resistance/Résistance                | Ha/main/prin.   | Ω          | 12,2 |      |  |
|                                                 | Hi/aux          | Ω          | 13,7 |      |  |
| Temp.-Regler/Thermostat                         |                 | Danfoss    |      |      |  |
| Typ/Type                                        |                 | 077 B 2054 |      |      |  |
| Reglerstellung/Position                         |                 | kalt       | warm |      |  |
| Schaltwerte/Switching values/                   | „ein“           | °C         | - 24 | - 16 |  |
| Valeurs de commutation                          | „aus“           |            | - 34 | - 24 |  |
|                                                 | („abtauen“ od.) | „alarm“    | - 19 | - 12 |  |
| Füllmenge/Fill.quantity/Charge                  | R12             | g          | 185  |      |  |
| Anschlußwert/Conn.load/Puiss. connectée         |                 | W          | 150  |      |  |
| Heizung/Heater/Chauffage                        |                 |            |      |      |  |
| Widerstand/Resistance/Resistance                |                 | Ω          |      |      |  |
| Leistung/Power/Puissance                        |                 | W          |      |      |  |
| Ventilator/Blower/Ventilateur                   |                 |            |      |      |  |
| Widerstand/Resistance/Résistance                |                 | Ω          |      |      |  |
| Magnetventil/Magnetic valve/Electrovanne        |                 |            |      |      |  |
| Widerstand/Resistance/Résistance                |                 | Ω          |      |      |  |
| Spannung/Voltage/Tension                        |                 | V          |      |      |  |