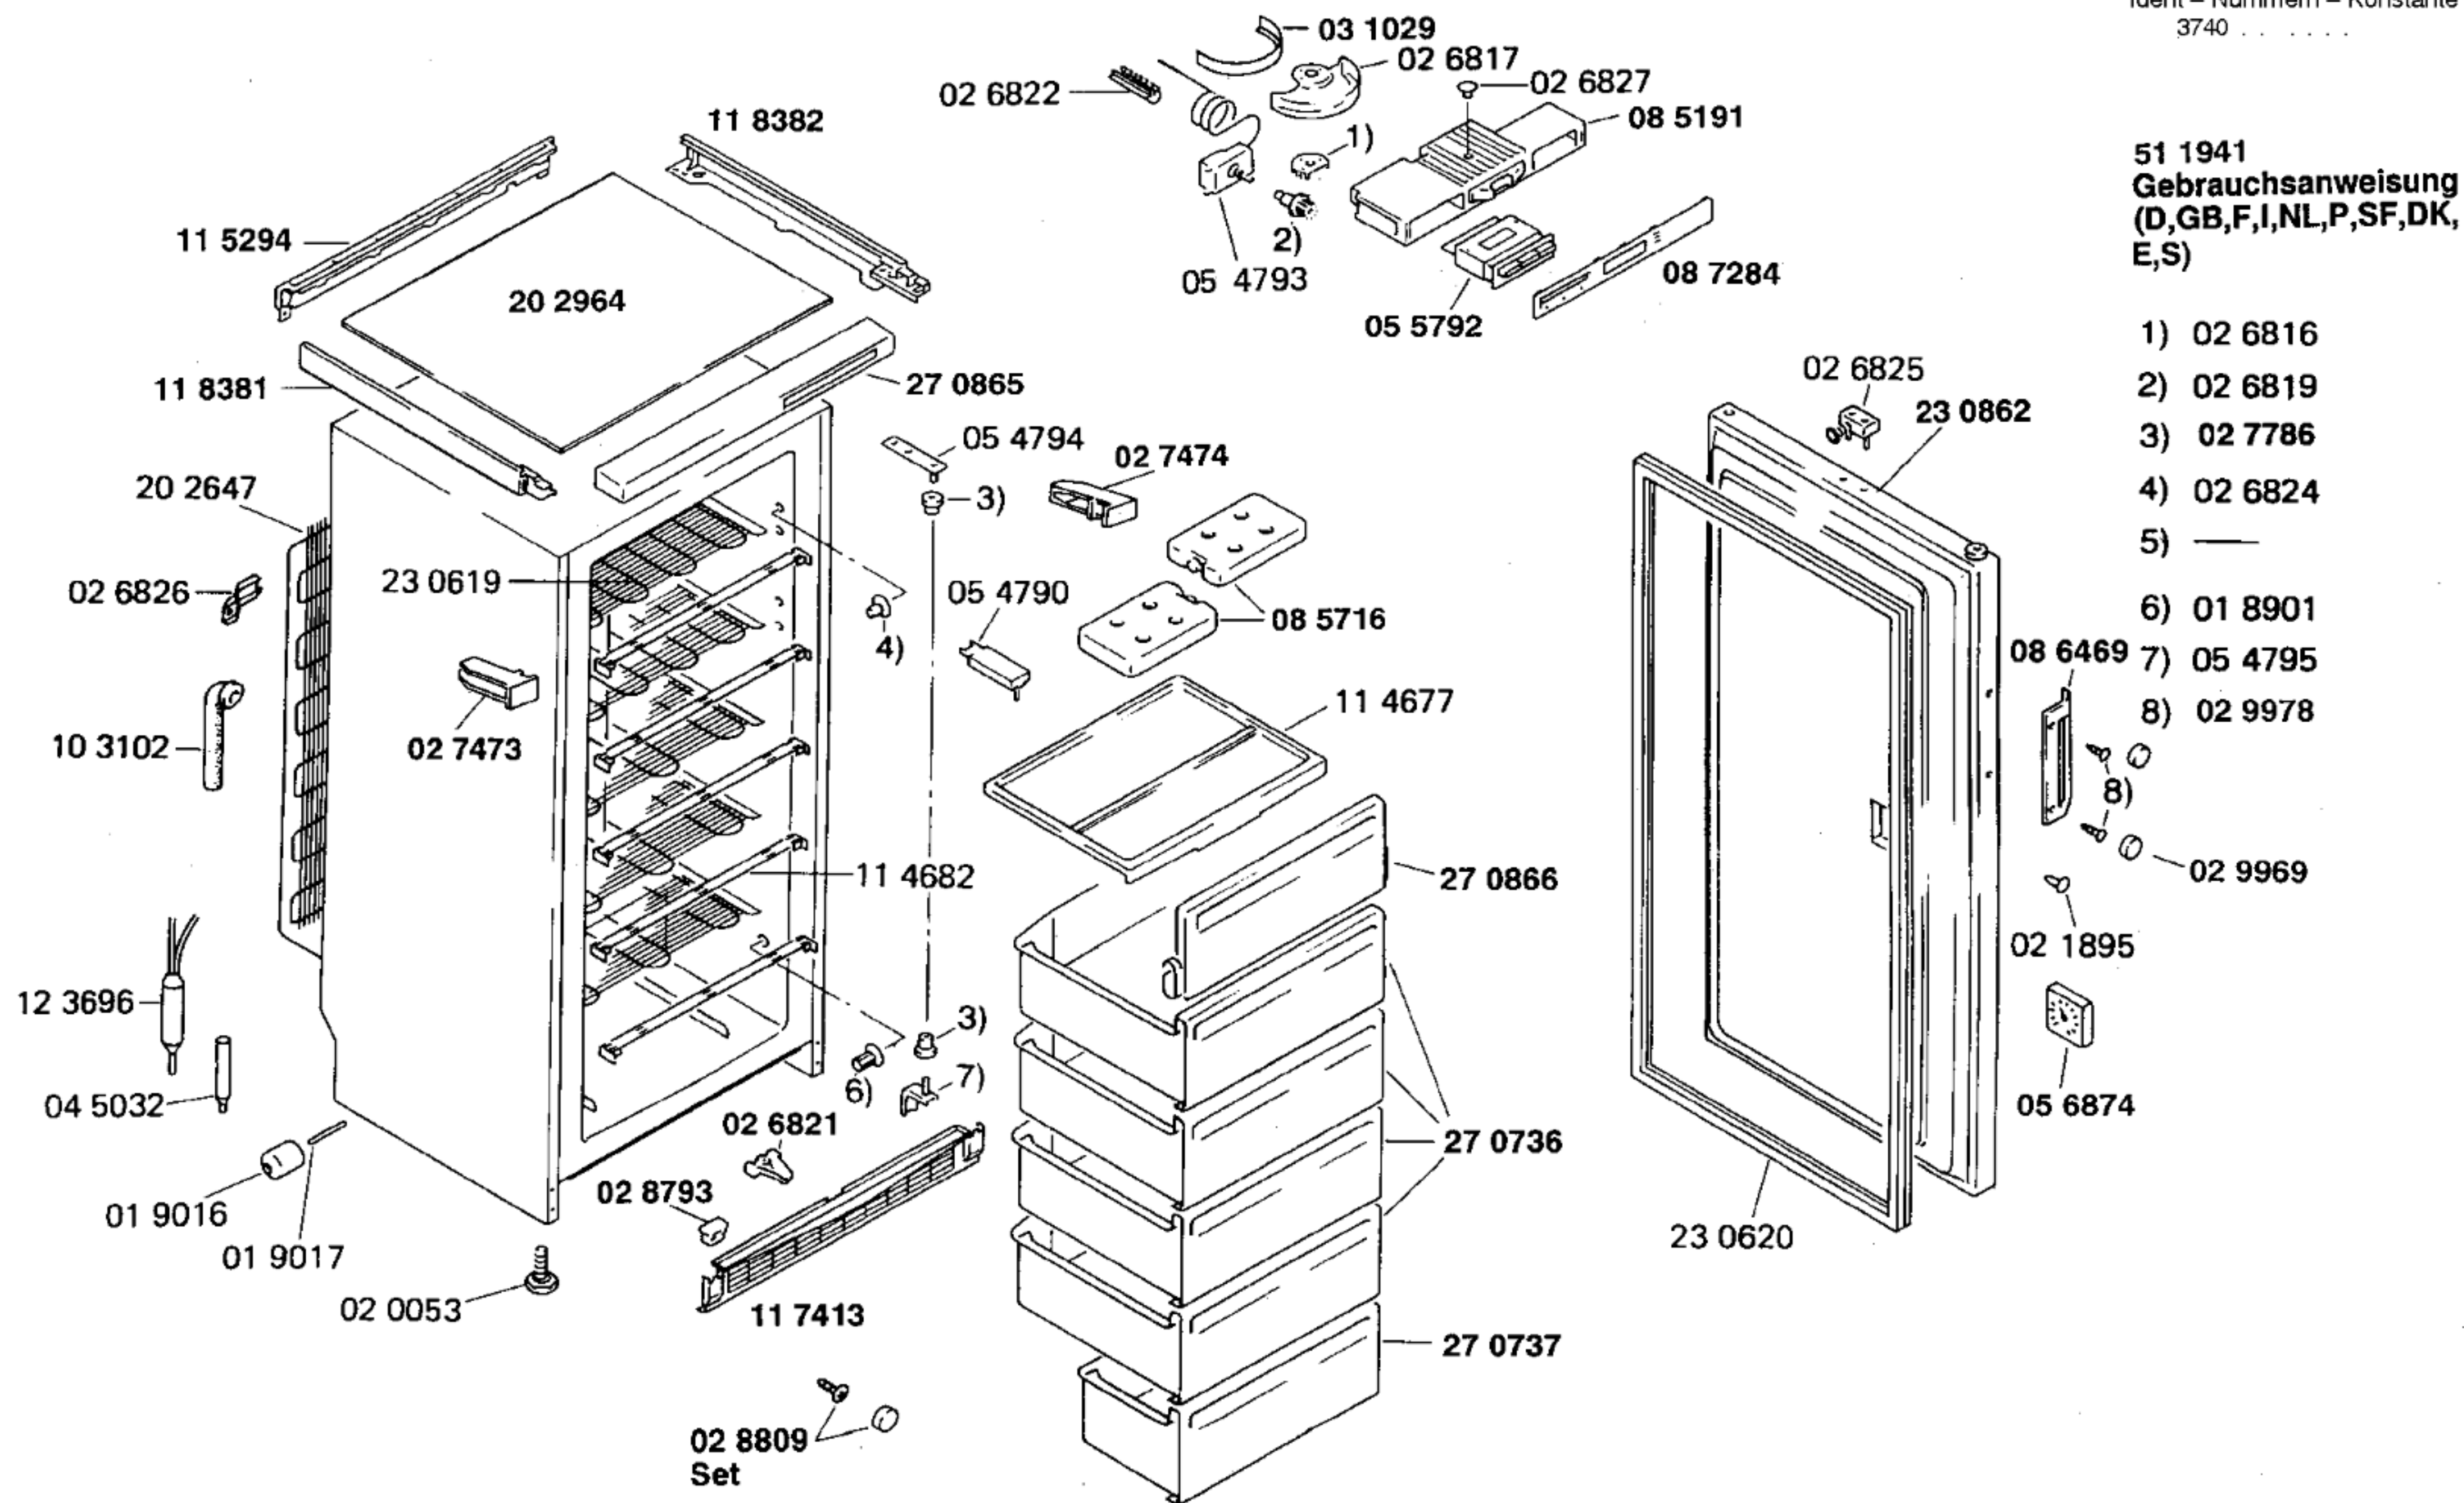
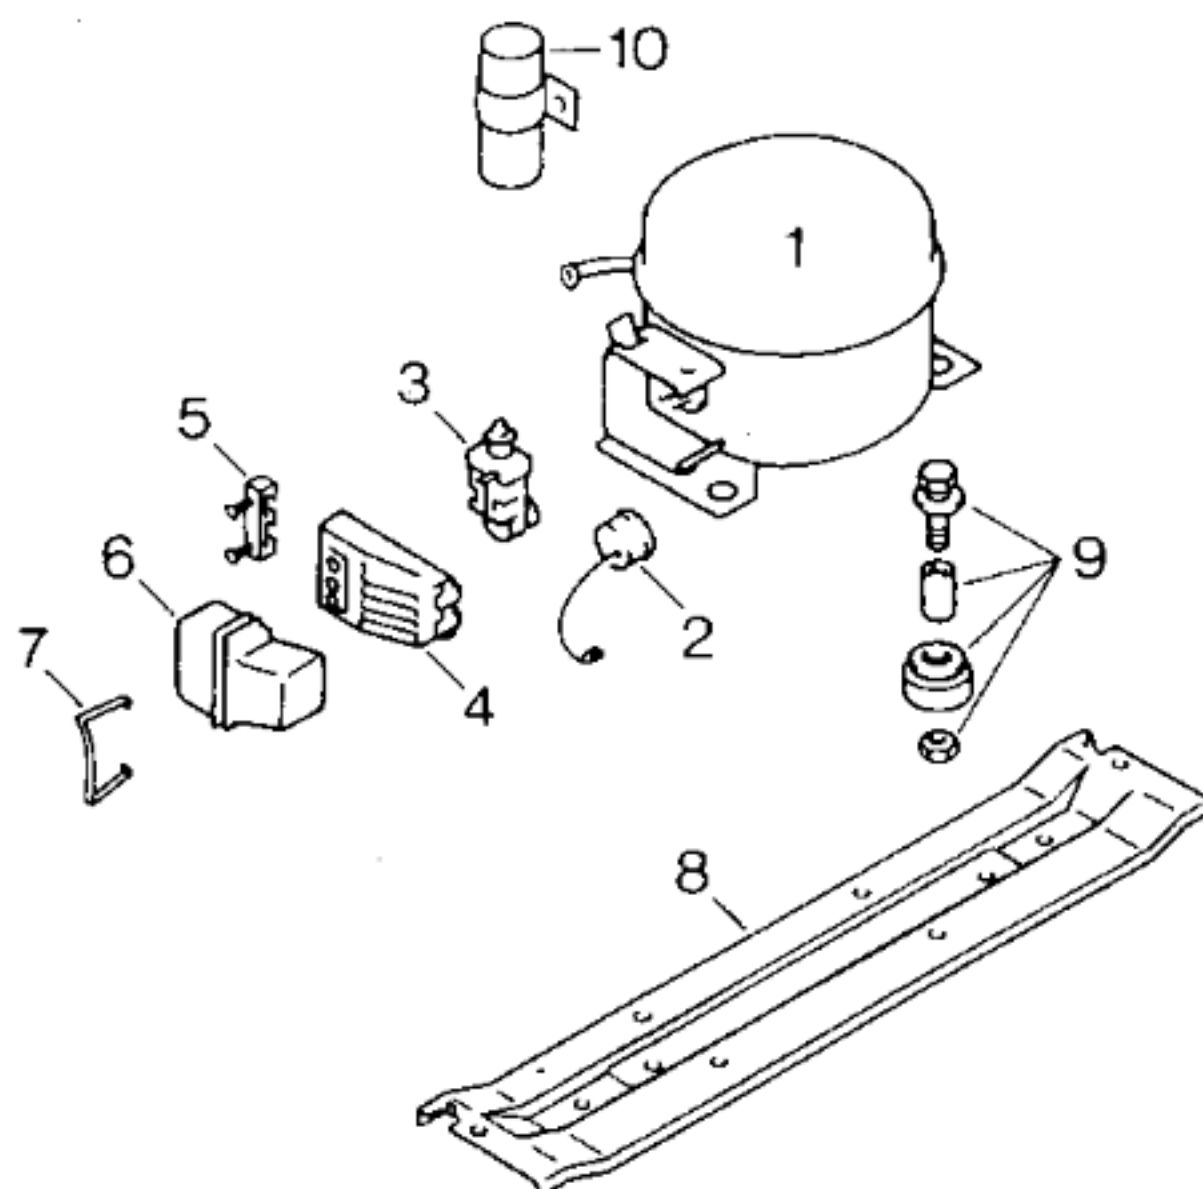


**BOSCH**GSA 2612/01-EU1  
GSA 2612CH/01-CH1GEFRIERGERÄTE  
Gefrierschränke, StandIdent - Nummern - Konstante  
3740 . . . . .


Ident – Nummern – Konstante  
3740 . . . . .


| Pos. | EU1,CH1         |  |  |  |
|------|-----------------|--|--|--|
|      | <b>Danfoss</b>  |  |  |  |
|      | <b>FR 8,5 A</b> |  |  |  |
| 1    | <b>14 0157</b>  |  |  |  |
| 2    |                 |  |  |  |
| 3    | <b>02 0108</b>  |  |  |  |
| 4    |                 |  |  |  |
| 5    | <b>02 1361</b>  |  |  |  |
| 6    | <b>05 1413</b>  |  |  |  |
| 7    | <b>02 2339</b>  |  |  |  |
| 8    | <b>11 9114</b>  |  |  |  |
| 9    | <b>05 0166</b>  |  |  |  |
| 10   |                 |  |  |  |
| 11   |                 |  |  |  |
| 12   |                 |  |  |  |

**TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES**

|                                                         |                 |            |      |      |  |
|---------------------------------------------------------|-----------------|------------|------|------|--|
| Verdichter/Compressor/Compresseur                       |                 | Danfoss    |      |      |  |
| Typ/Type                                                |                 | FR 8,5 A   |      |      |  |
| Förderleistung/Delivery/Débit                           |                 | l/h        | 1430 |      |  |
| Anlaufstrom/Starting current/Cour. de démarrage         |                 | A          | 10,3 |      |  |
| Widerstand/Resistance/Résistance                        | Ha/main/prin.   | Ω          | 12,2 |      |  |
|                                                         | Hi/aux          | Ω          | 13,7 |      |  |
| Temp.-Regler/Thermostat                                 |                 | Danfoss    |      |      |  |
| Typ/Type                                                |                 | 077 B 2054 |      |      |  |
| Reglerstellung/Position                                 |                 | kalt       | warm |      |  |
| Schaltwerte/Switching values/<br>Valeurs de commutation | „ein“           | °C         | - 24 | - 16 |  |
|                                                         | „aus“           |            | - 34 | - 24 |  |
|                                                         | („abtauen“ od.) | „alarm“    | - 19 | - 12 |  |
| Füllmenge/Fill.quantity/Charge                          |                 | R12        | g    | 185  |  |
| Anschlußwert/Conn.load/Puiss. connectée                 |                 | W          | 150  |      |  |
| Heizung/Heater/Chauffage                                |                 |            |      |      |  |
| Widerstand/Resistance/Résistance                        |                 | Ω          |      |      |  |
| Leistung/Power/Puissance                                |                 | W          |      |      |  |
| Ventilator/Blower/Ventilateur                           |                 |            |      |      |  |
| Widerstand/Resistance/Résistance                        |                 | Ω          |      |      |  |
| Magnetventil/Magnetic valve/Electrovanne                |                 |            |      |      |  |
| Widerstand/Resistance/Résistance                        |                 | Ω          |      |      |  |
| Spannung/Voltage/Tension                                |                 | V          |      |      |  |