



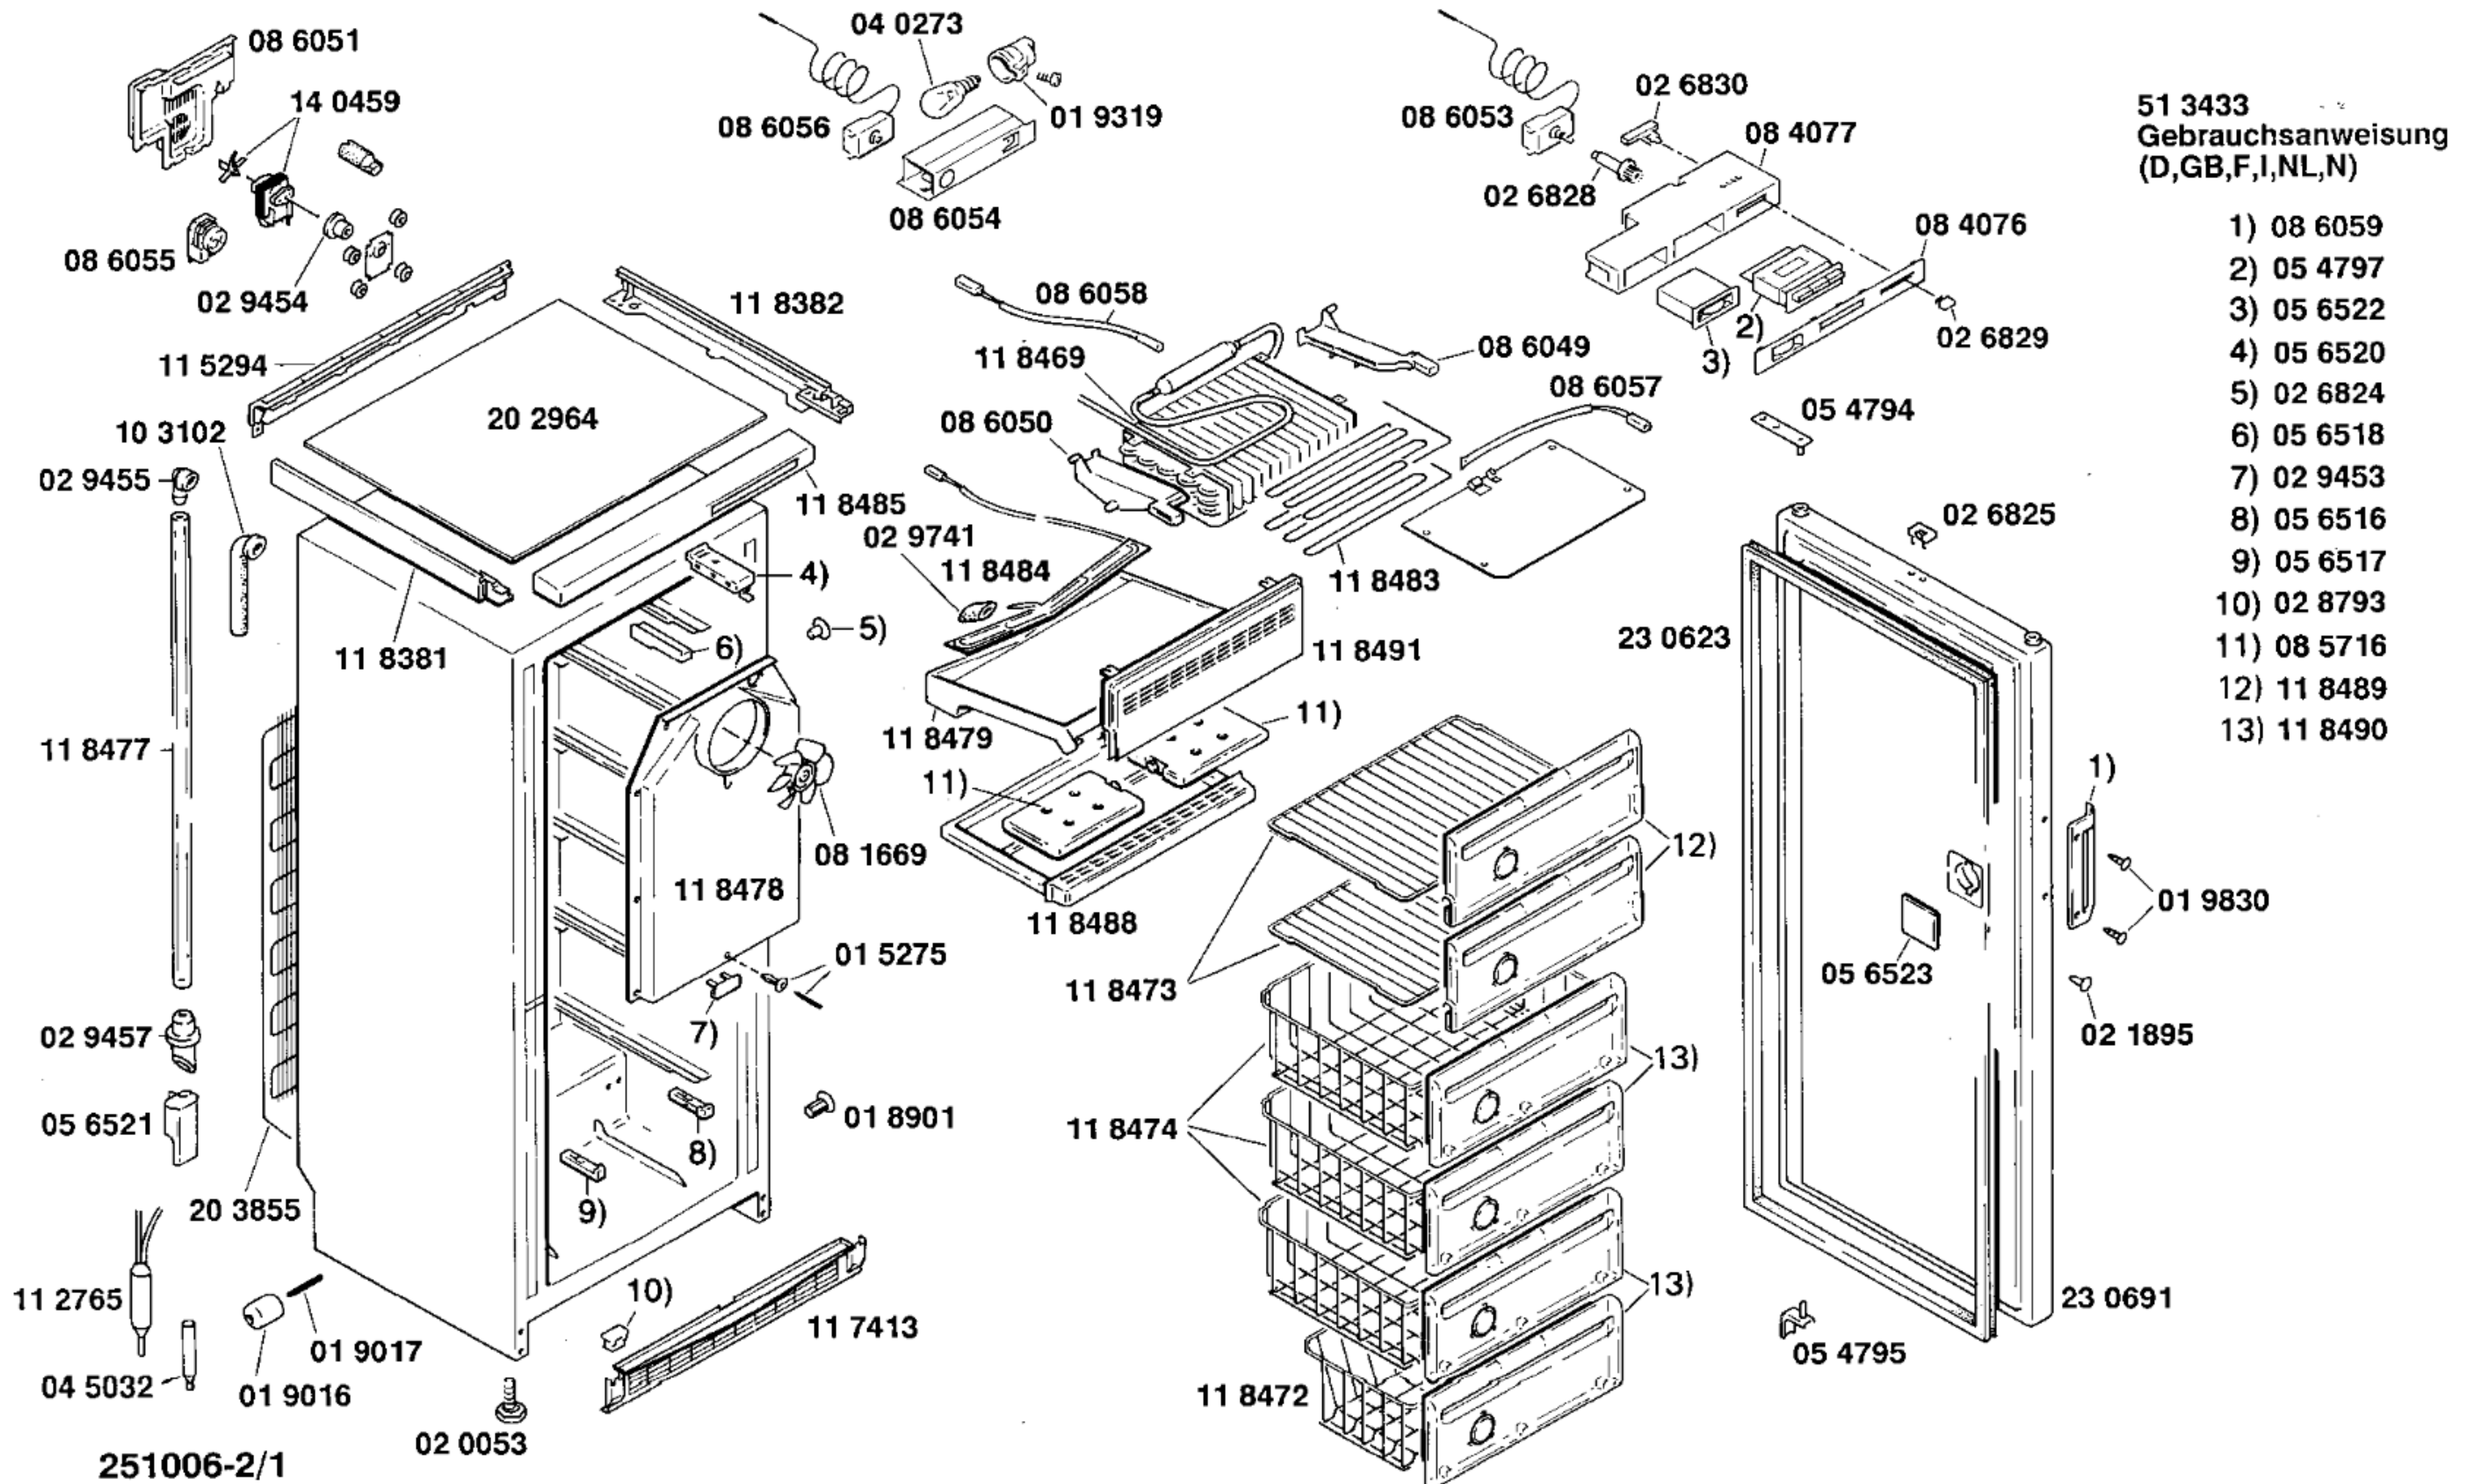

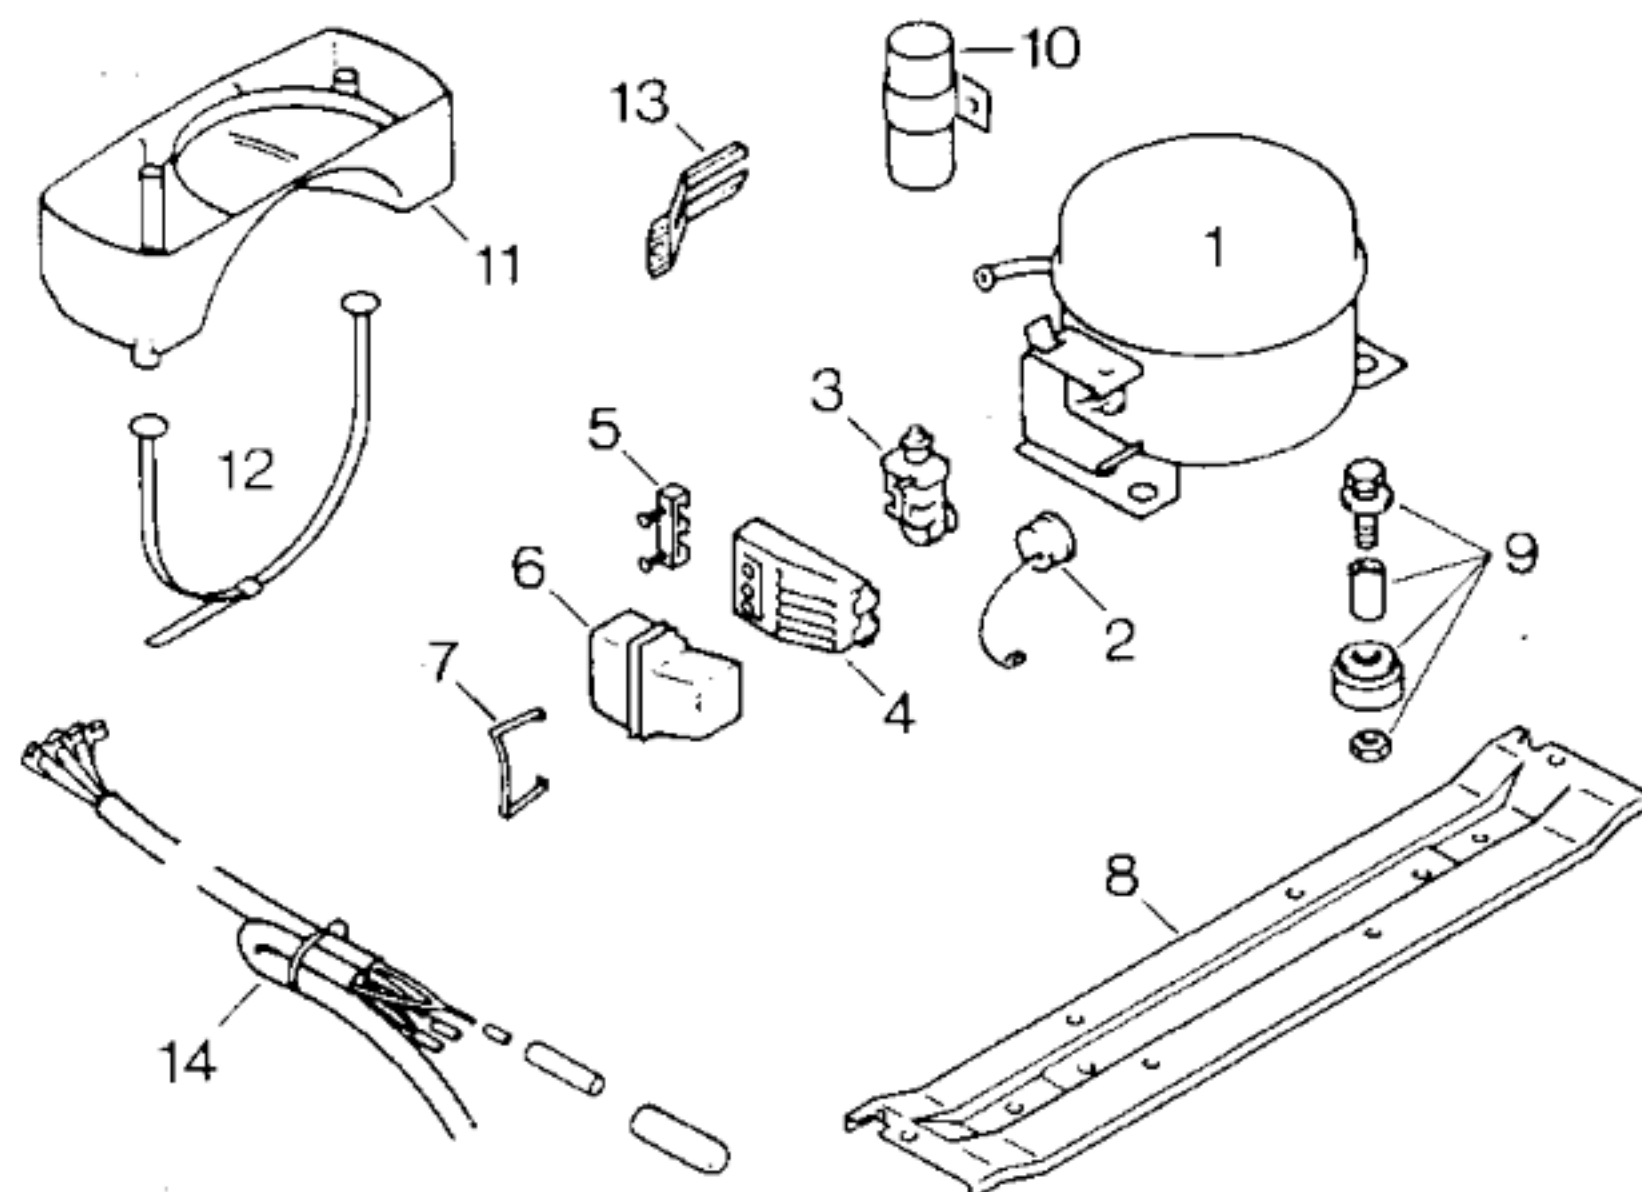

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Aspera			
Typ/Type		BY 1116 A			
Förderleistung/Delivery/Débit	l/h	1450			
Anlaufstrom/Starting current/Cour. de démarrage	A	9,9			
Widerstand/Resistance/Résistance	Ha/main/prin.	Ω	11,7		
	Hi/aux	Ω	37,7		
Temp.-Regler/Thermostat		Danfoss		Ranco	
Typ/Type		077B0/09 IX 4742		K 50 H 5658	
Reglerstellung/Position		kalt	warm	ein	aus
Schaltwerte/Switching values/	„ein“	-26,9	-18		
Valeurs de commutation	„aus“	-33,5	-23		
(„abtauen“ od.)	„alarm“			-12	-15
Füllmenge/Fill quantity/Charge	R12	g	220		
Anschlußwert/Conn. load/Puiss. connectée		W	170		
Heizung/Heater/Chauffage		Abtauheizung		Rinnenheizung	
Widerstand/Resistance/Résistance	Ω	173		6050	
Leistung/Power/Puissance	W	280		8	
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance	Ω	340			
Schaltuhr/Timer/Minuterie de contact					
Widerstand/Resistance/Resistance	Ω	6500			

Pos.	Aspera			
	BY 1116 A-BC			
1	14 0460			
2	02 6559			
3	02 9456			
4	05 1748			
5				
6	05 1746			
7	02 2339			
8	11 9114			
9	05 0166			
10	05 6524			
11	08 6060			
12				
13	04 2688			
14				