



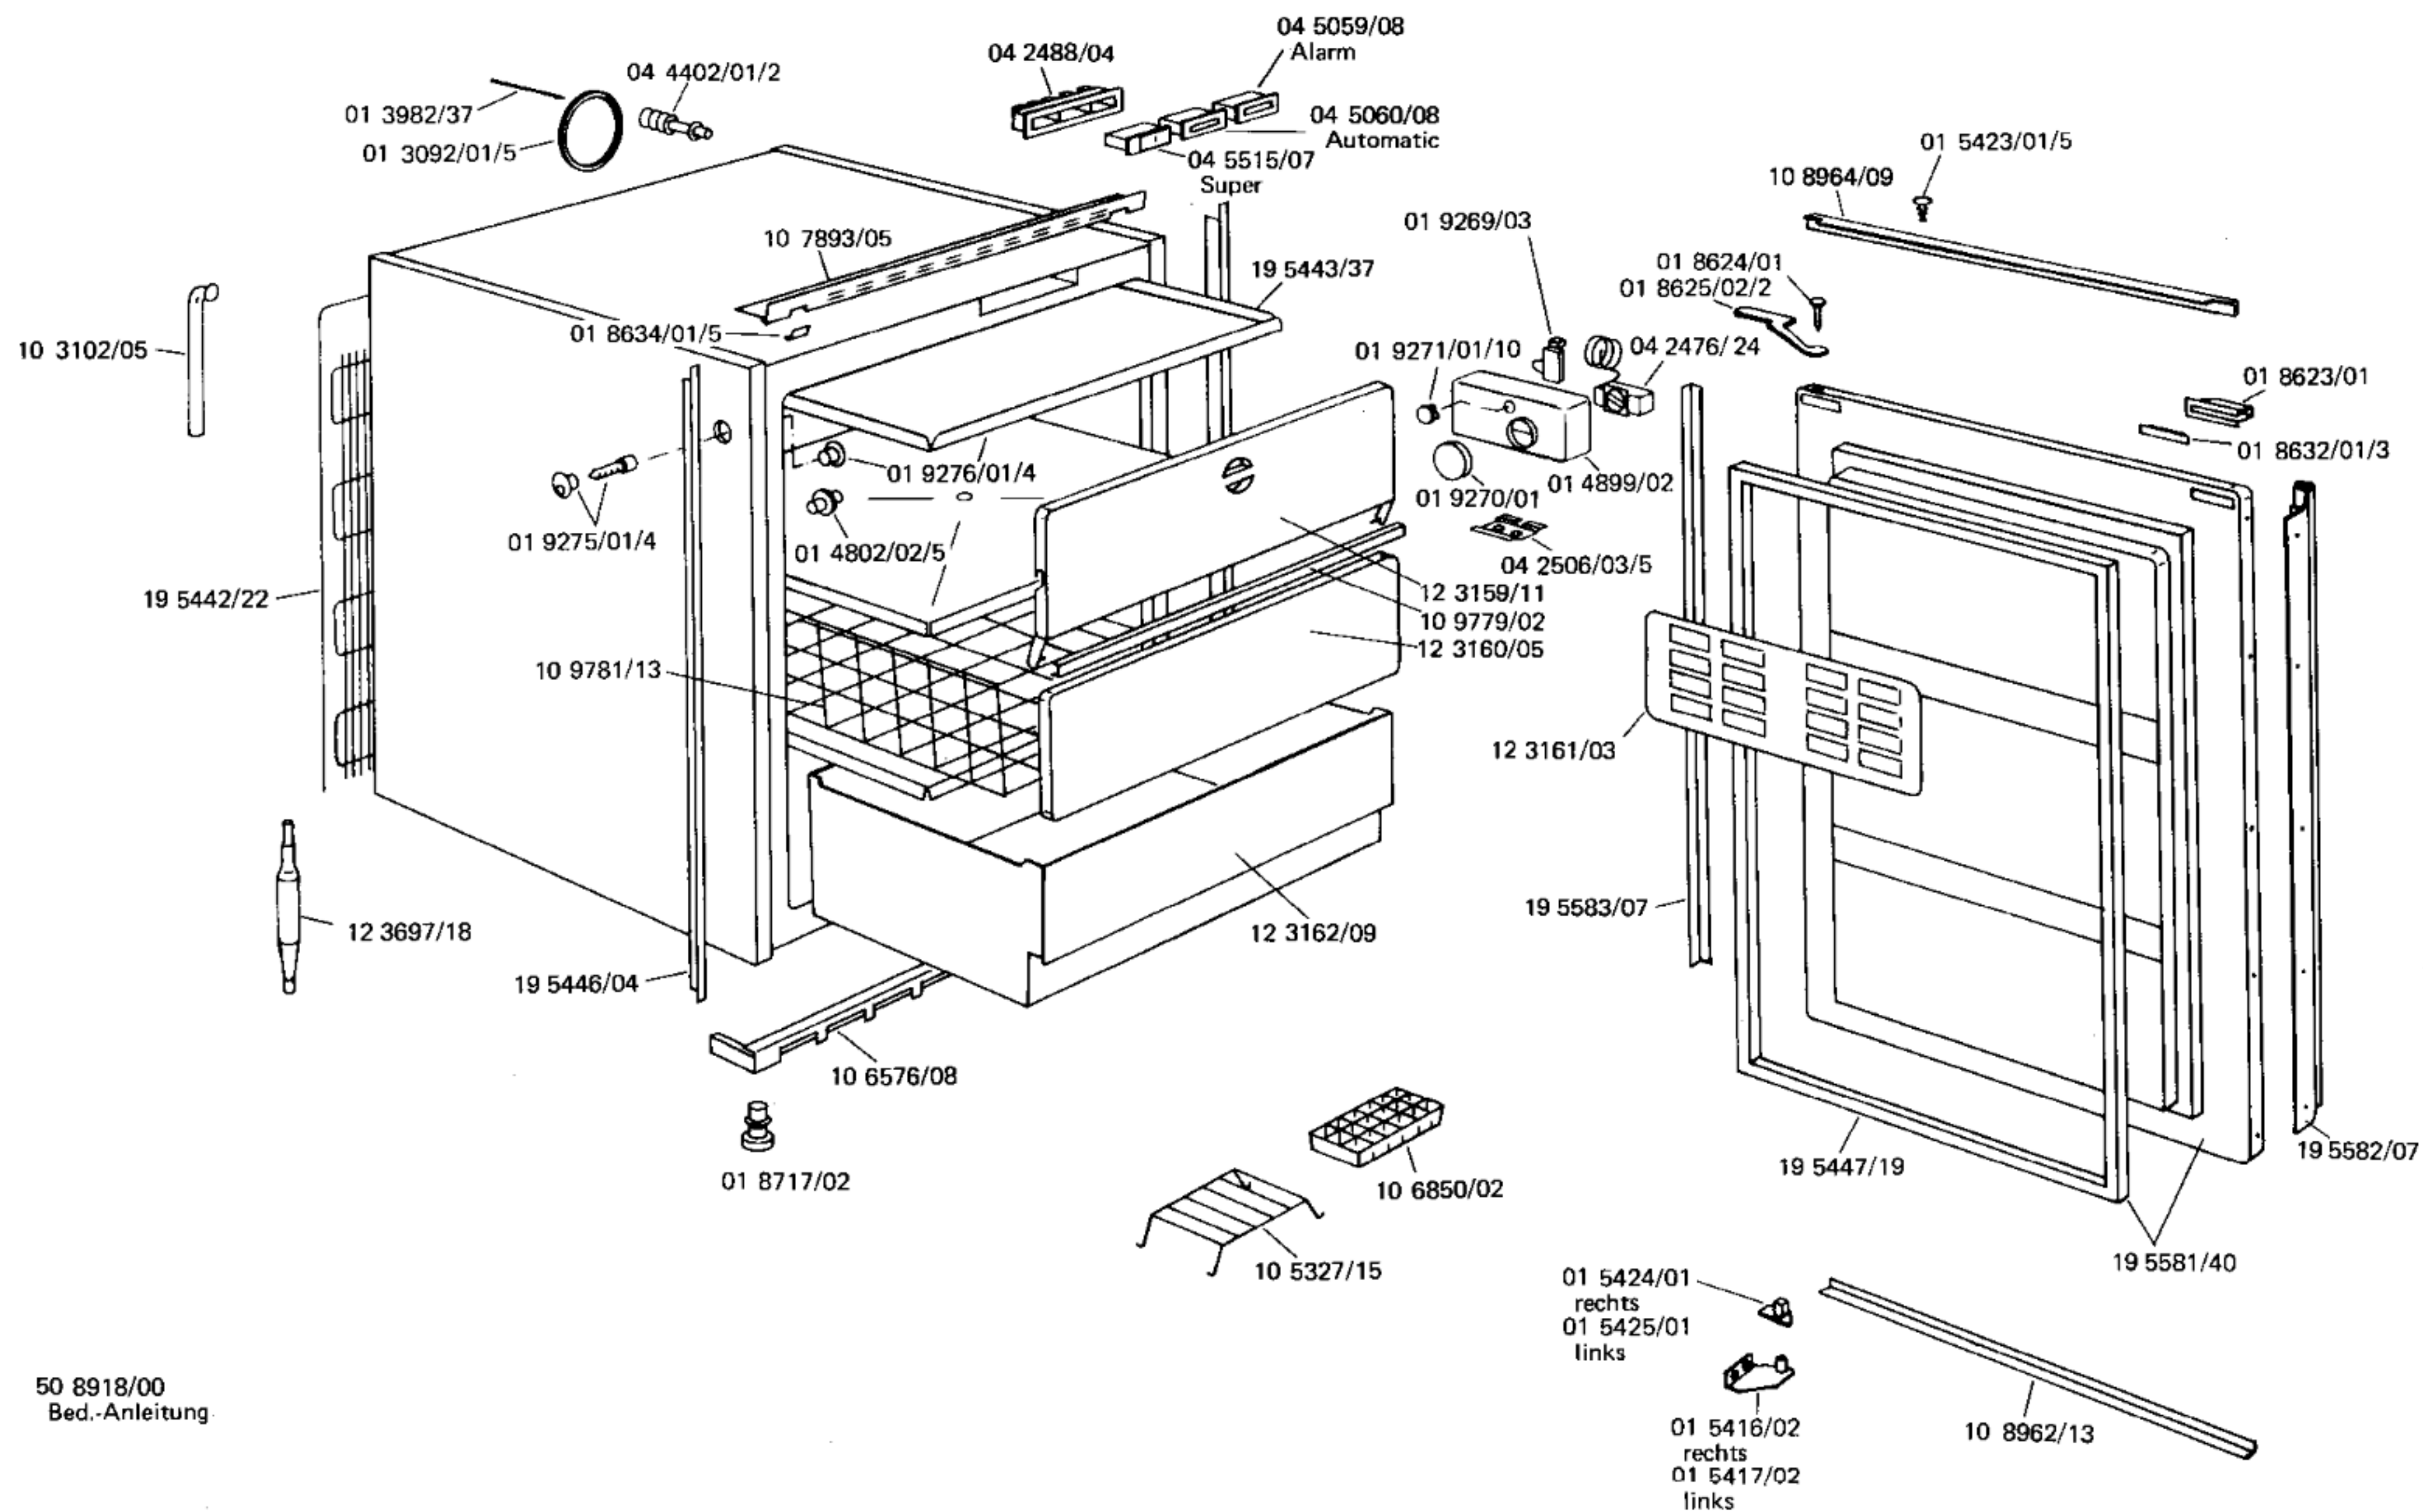

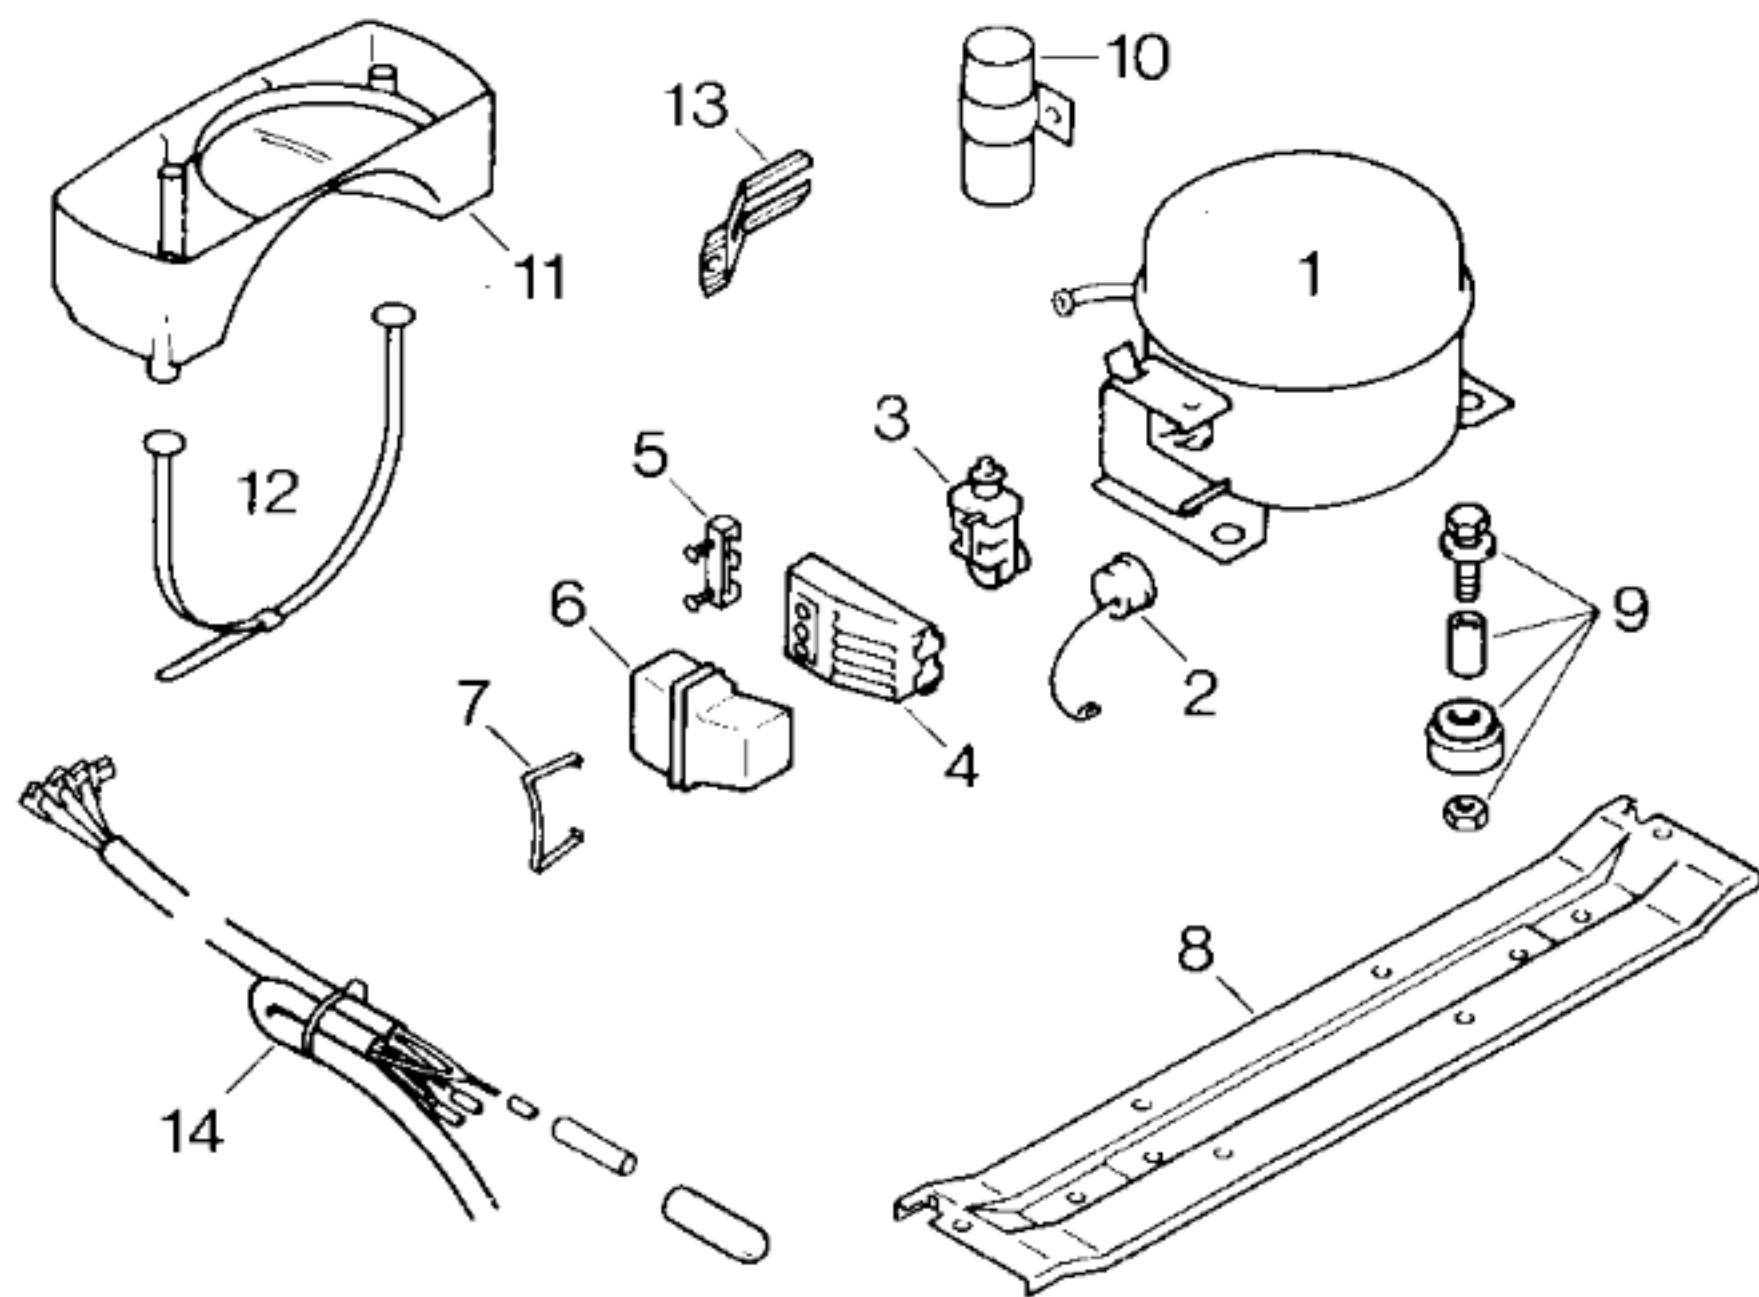

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur					
Typ/Type		Bosch	Danfoss		
Förderleistung/Delivery/Débit	l/h	V 792	TL 4 A		
Anlaufstrom/Starting current/Cour. de démarrage	A	9,4	7,8		
Widerstand/Resistance/Résistance	Ha/main/prin.	18,0	23,8		
	Hi/aux	24,0	19,7		
Temp.-Regler/Thermostat					
Typ/Type		Bosch			
Reglerstellung/Position		kalt	warm		
Schaltwerte/Switching values/	„ein“ °C	- 25	- 19		
Valeurs de commutation	„aus“	- 33	- 26		
(„abtauen“ od.)	„alarm“	- 20	- 15		
Füllmenge/Fill.quantity/Charge	R12	g	110		
Anschlußwert/Conn.load/Puiss. connectée	W	110			
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance	Ω				
Leistung/Power/Puissance	W				
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance	Ω				
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance	Ω				
Spannung/Voltage/Tension	V				

Pos.	Bosch	Danfoss		
1		13 1064/45		
2	07 2115/18			
3	07 1804/18	02 0108/27		
4	04 9865/05			
5				
6	04 9865/05	05 1413/05		
7				
8		*11 1838/03		
9	01 4895/02	*05 0166/05		
10				
11				
12				
13				
14		*05 1226/08		

*) Bei Ersatz des Bosch-Verdichters mitbestellen
To be ordered when replacing the Bosch compressor
A commander lors du remplacement du compresseur Bosch