



Mat. – Nr. – Konstante
3740


Gebrauchsanweisung
59 2750
(EN,FR,NL)

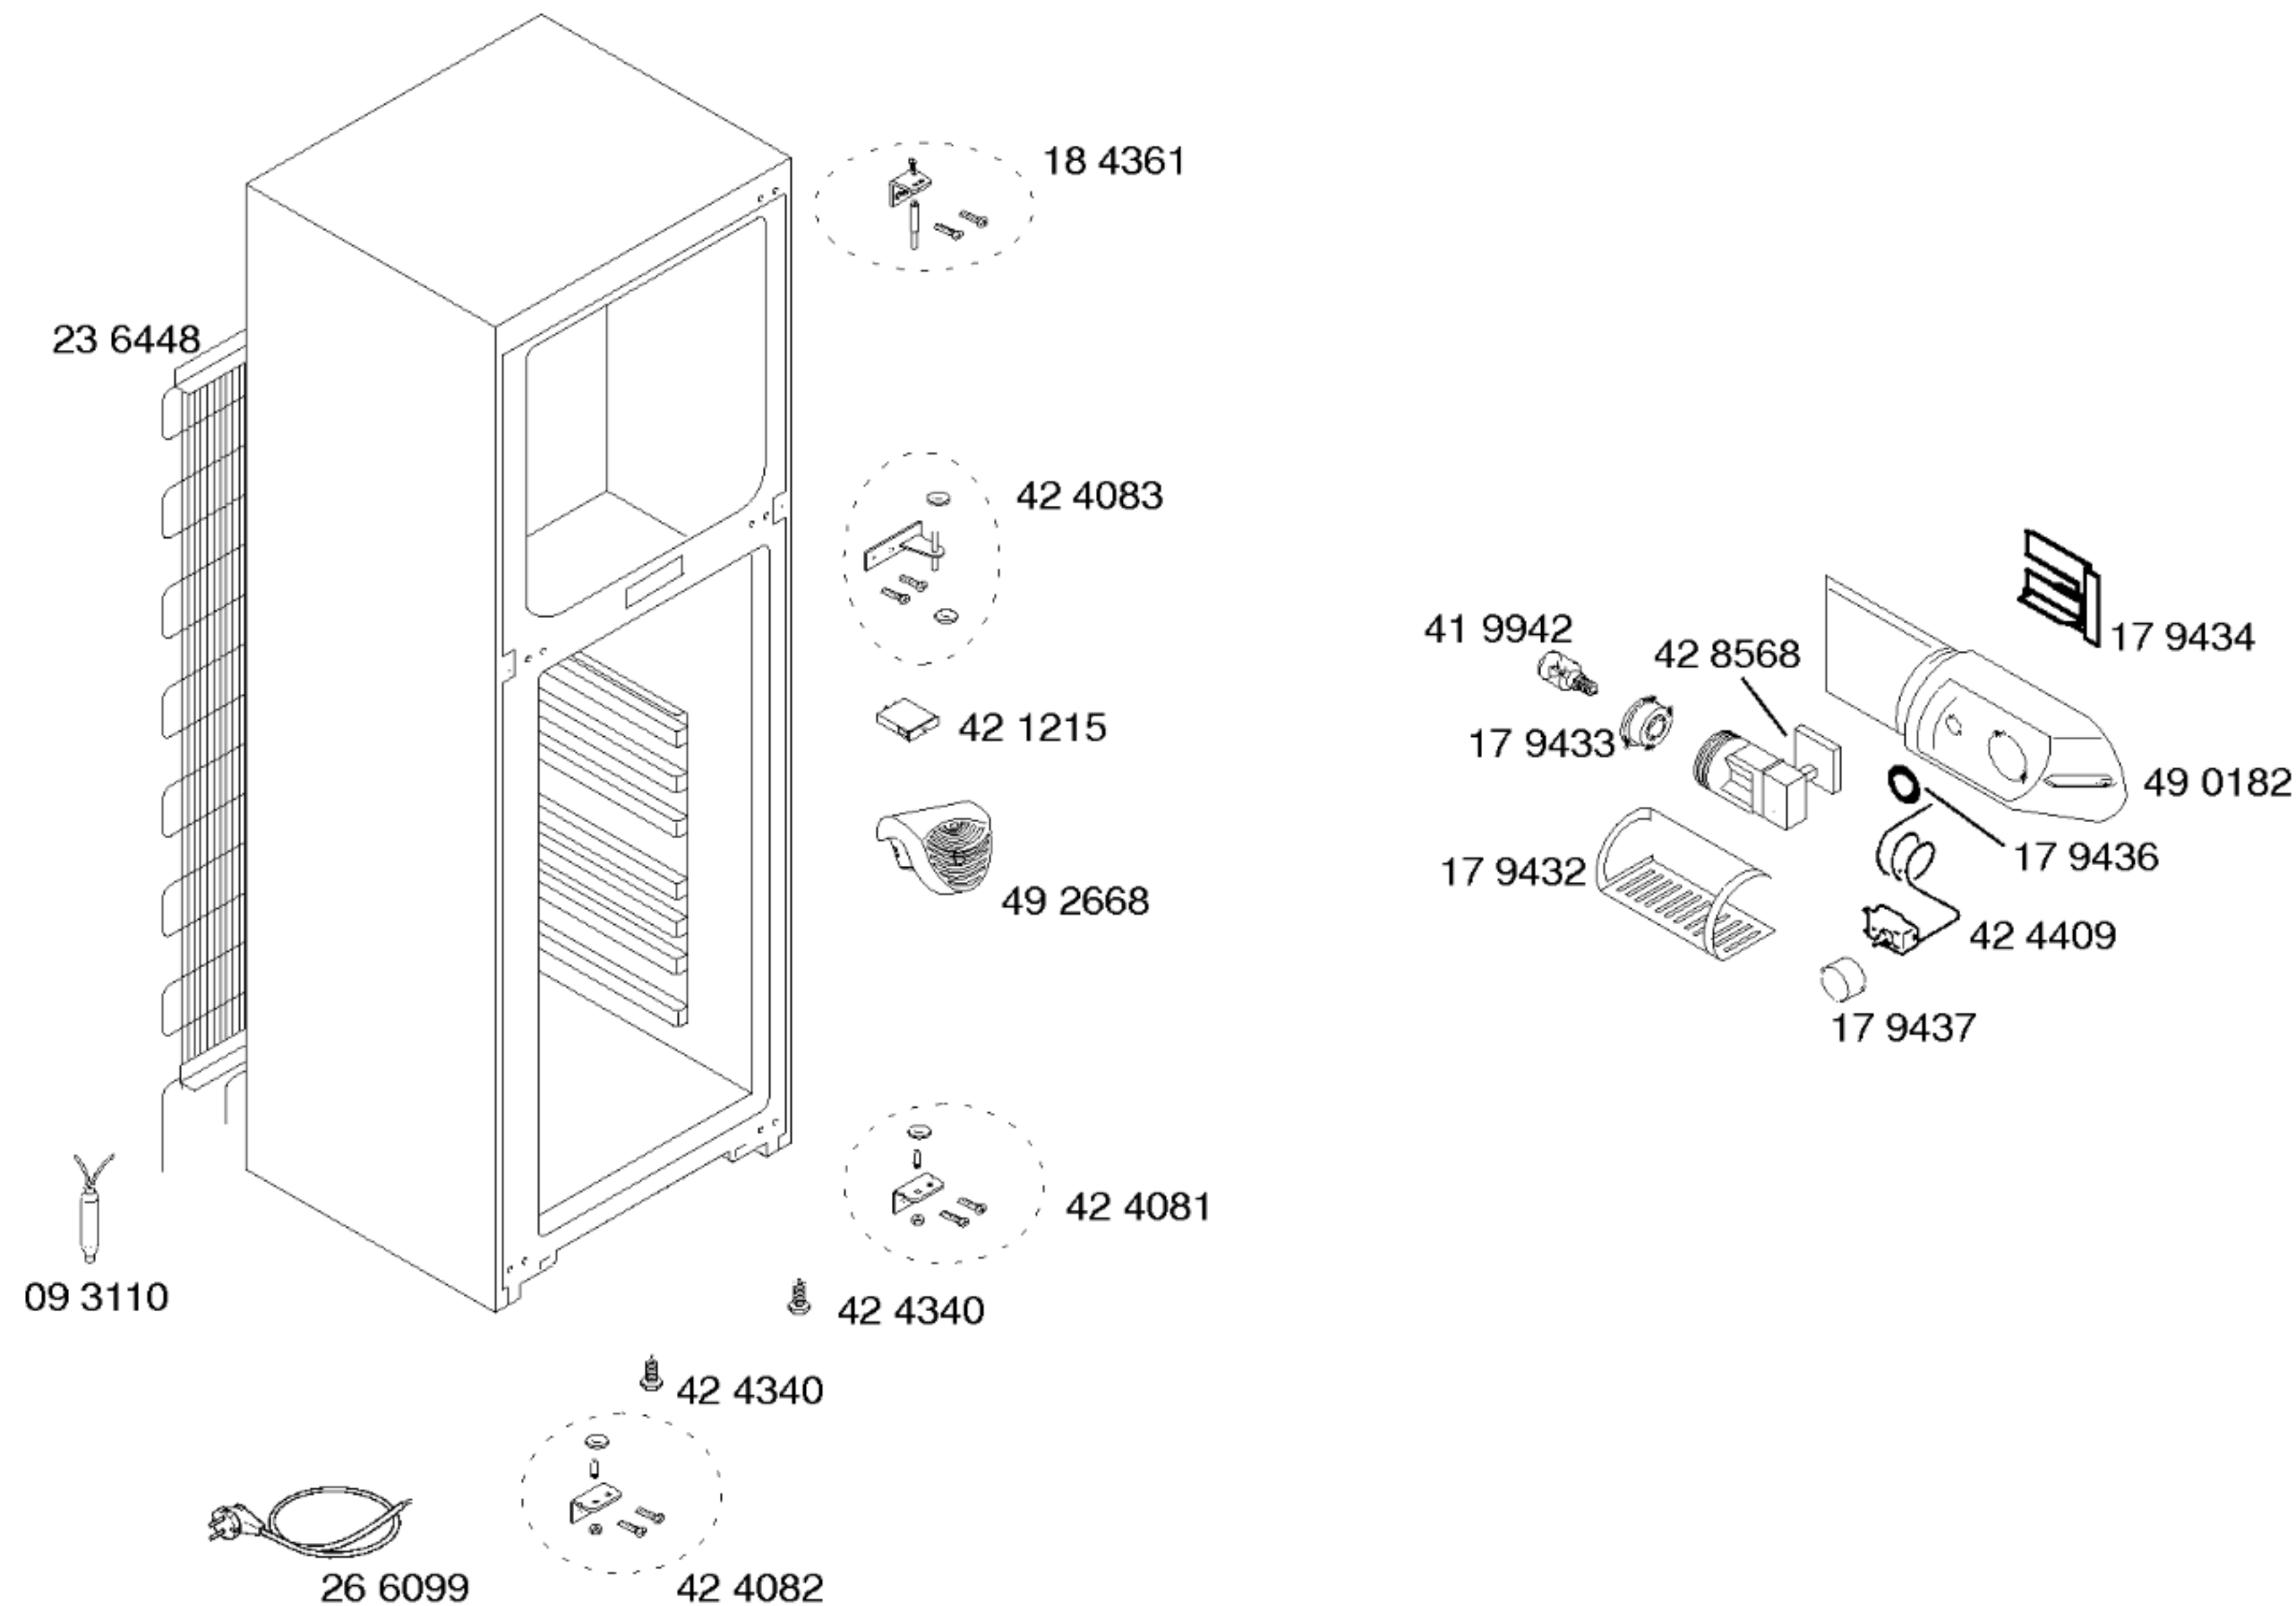

Mat. - Nr. - Konstante
3740

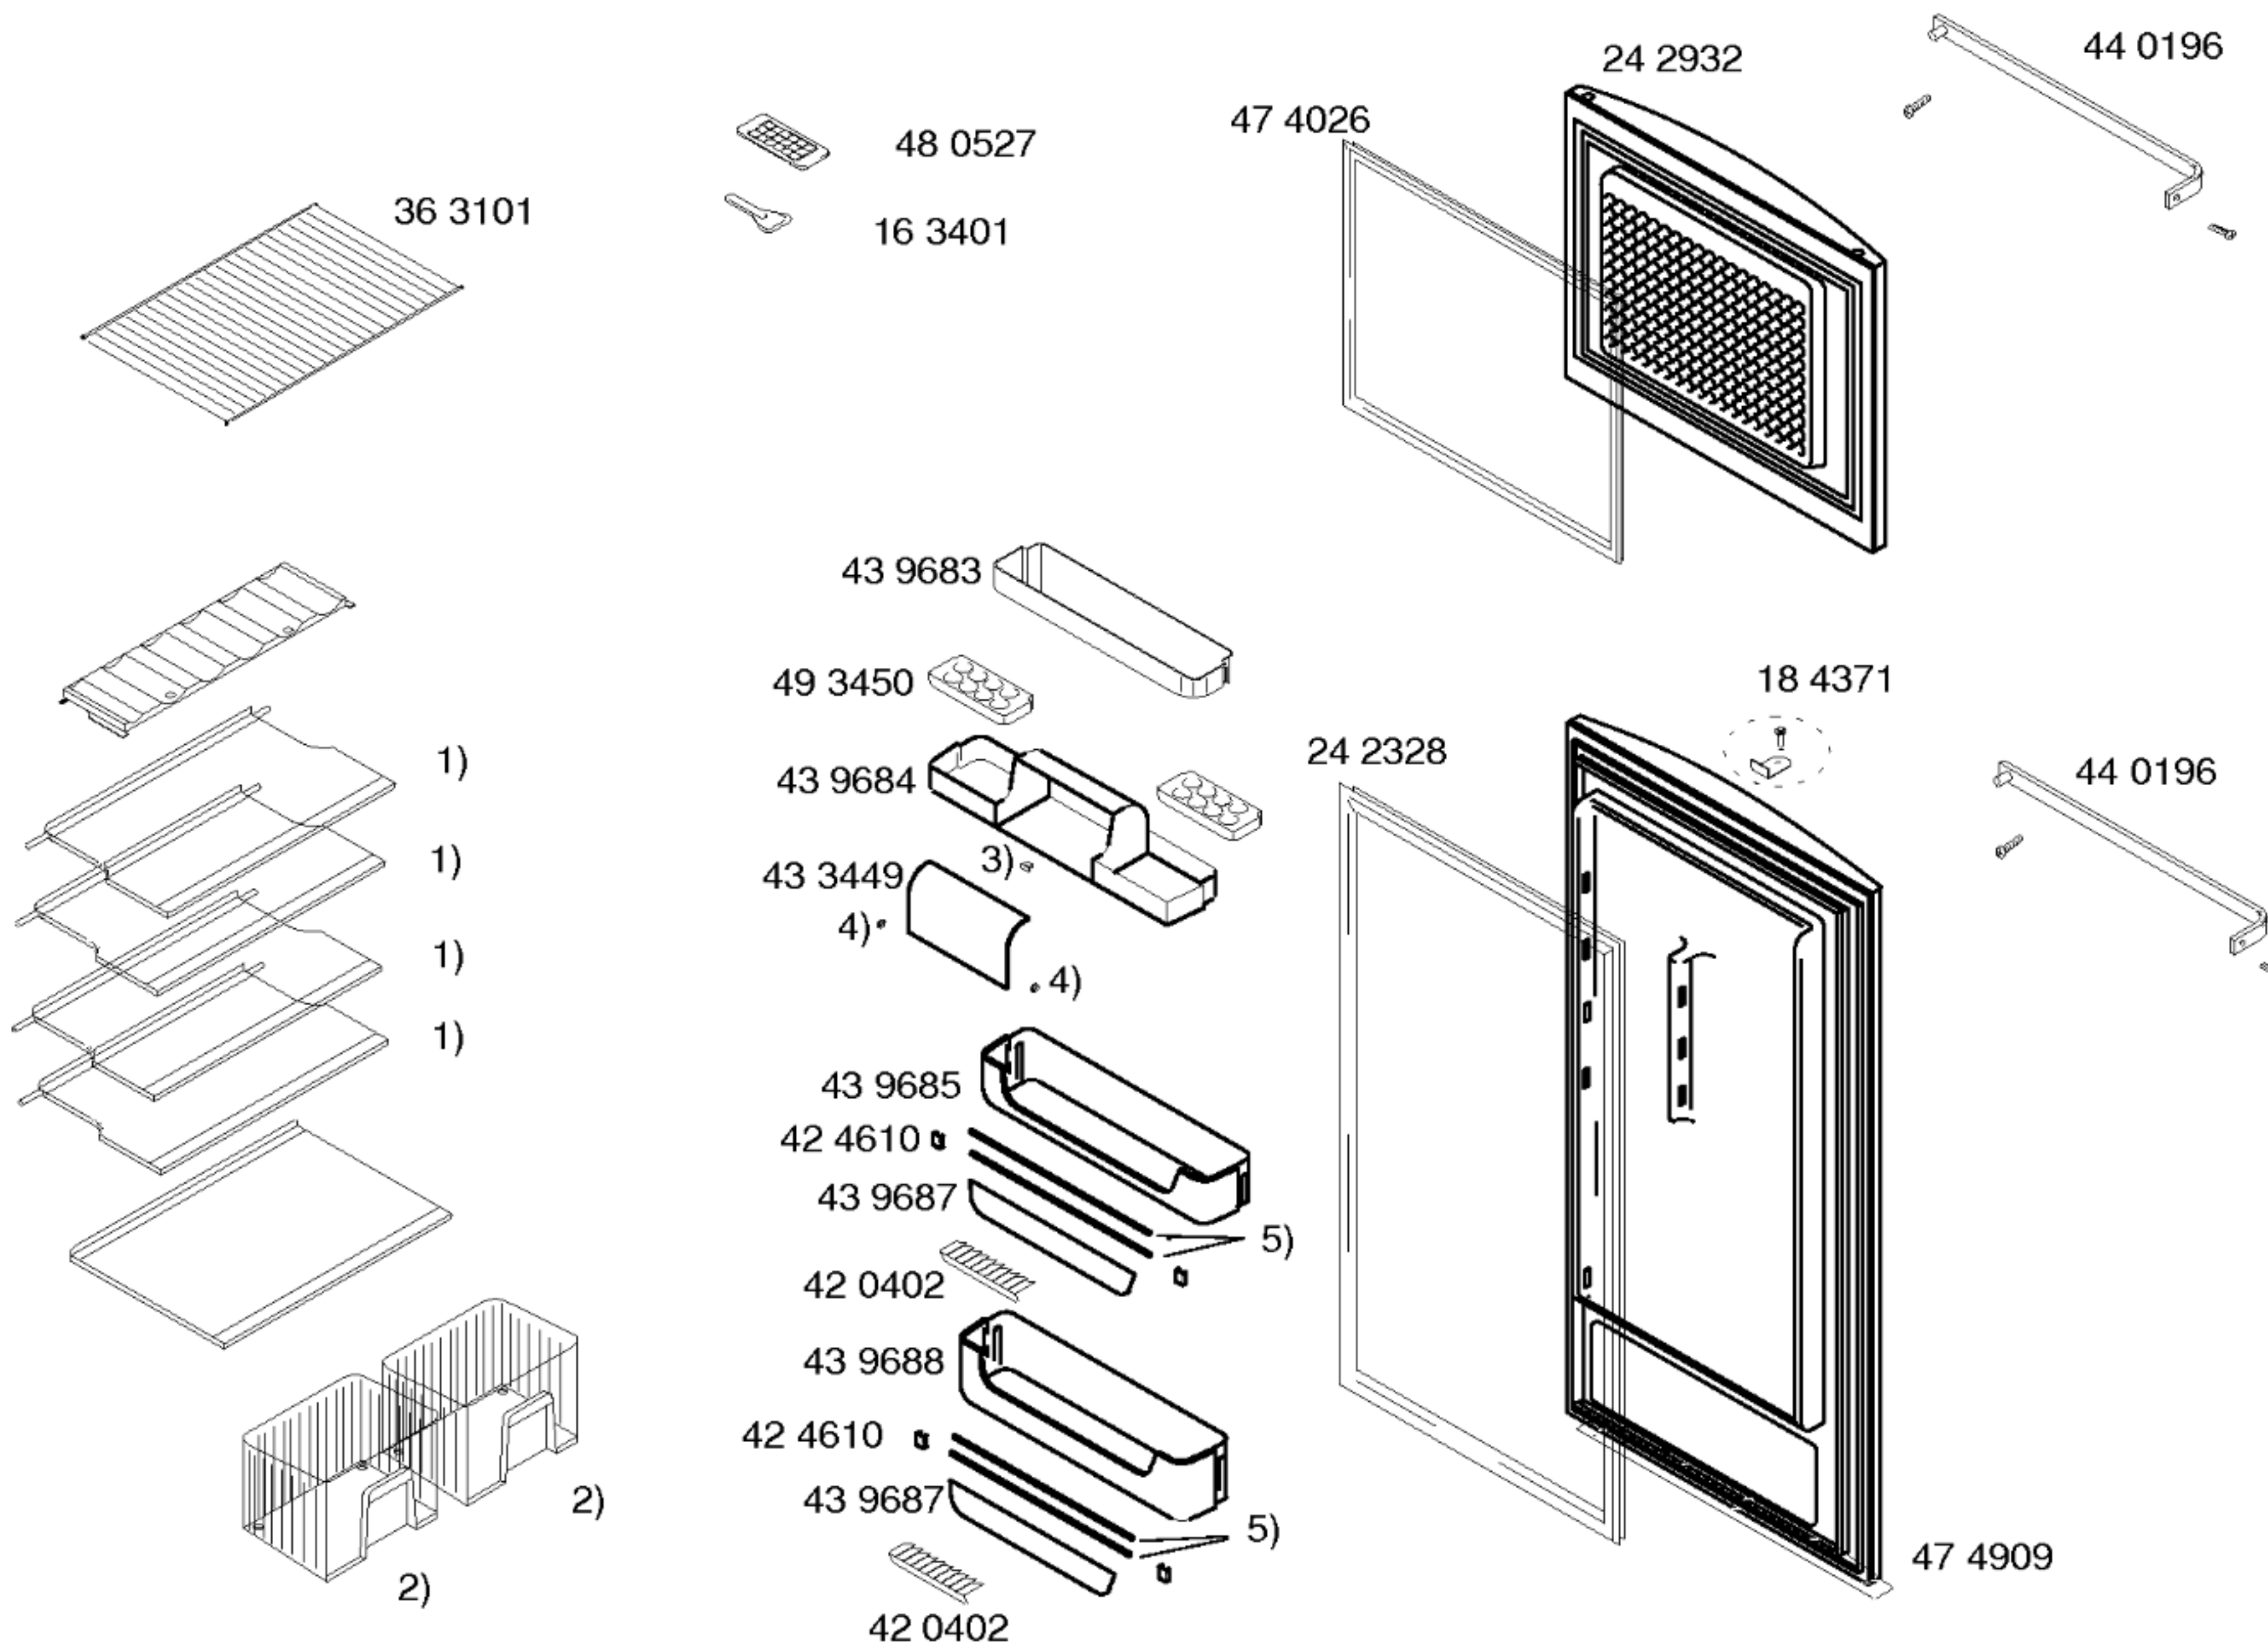

- 1)
- 2) 43 4582
- 3) 42 0751
- 4) 42 0751
- 5) 43 9686

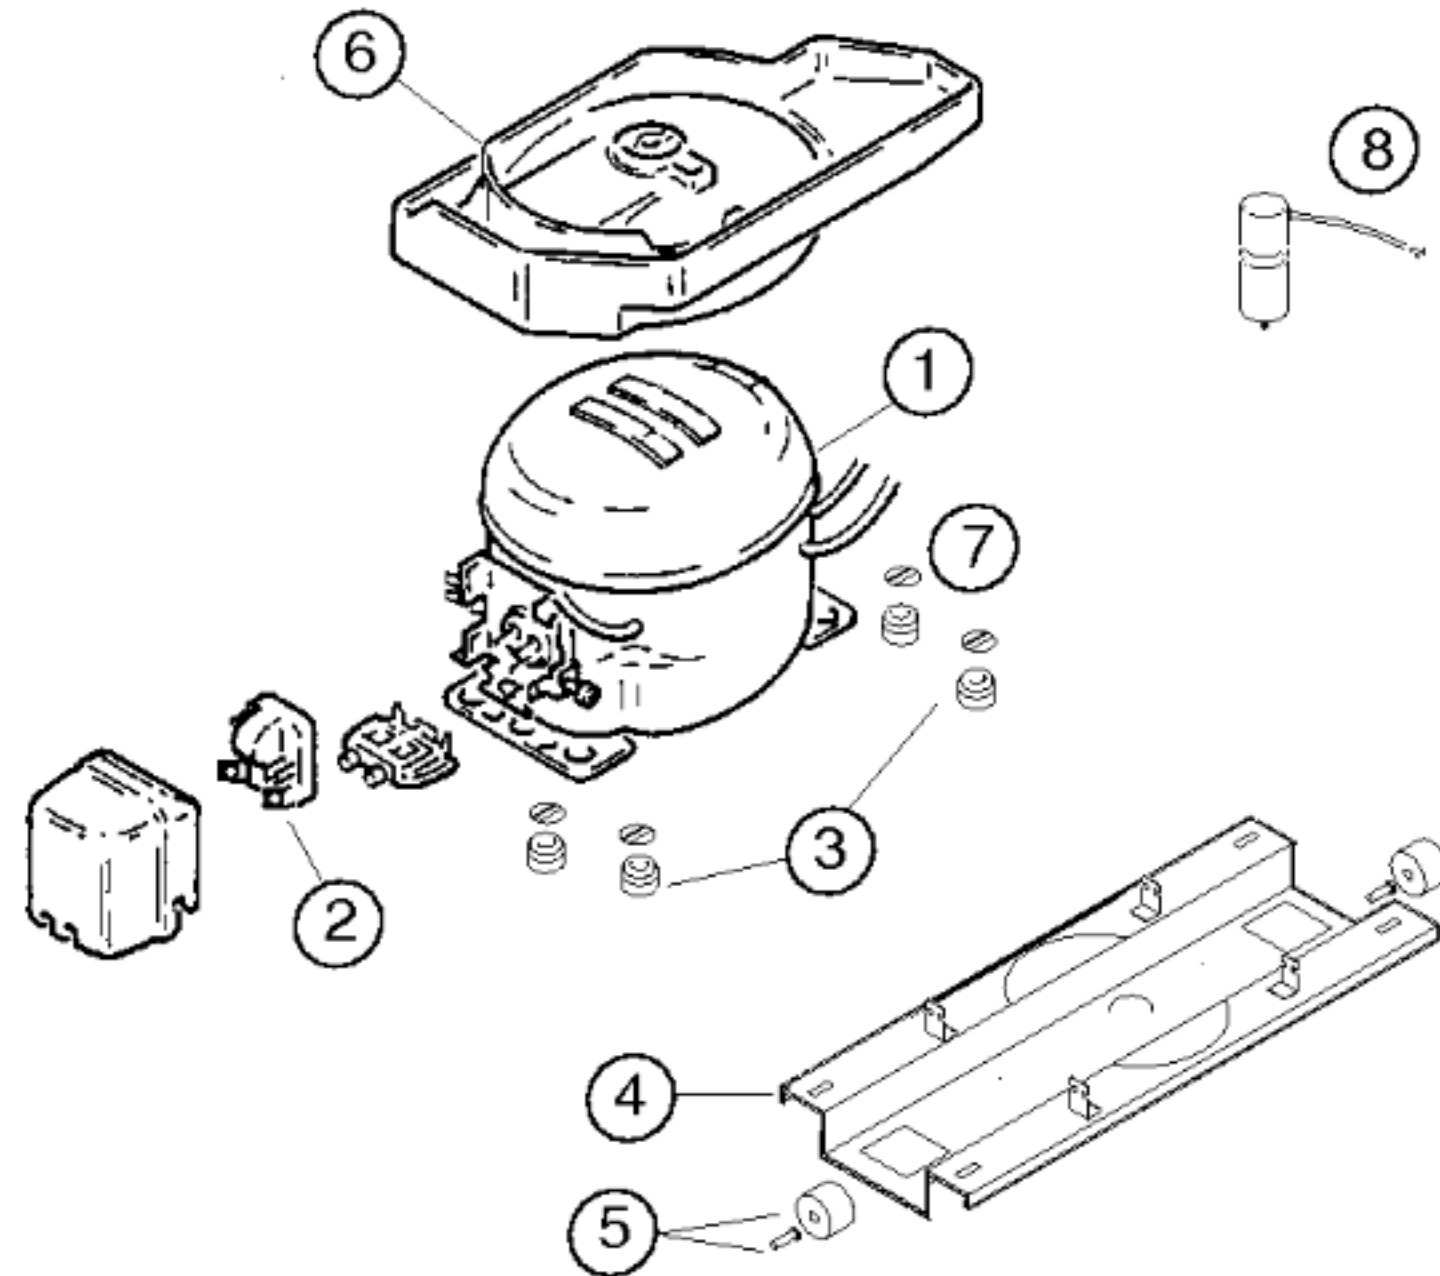

Pos.	Matsushita		
	DC125E12		
1	14 2169		
2	18 3873		
3	16 3427		
4	66 1436		
5	17 1318		
6	49 1245		
7	17 1519		
8	60 7801		
9			
10			
11			
12			

Mat. – Nr. – Konstante
3740
Mat. – Nr. – Konstante
3740

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER

Verdichter/Compressor/Kompresör Typ/Type/Tip Förderleistung/Delivery/Verim/h Anlaufstrom/Starting current/Giris akimi Widerstand/Resistance/Rezistans Ha/ Hi/aux.	Matsushita DC125E12 2074 10.9 12.7 18.0		
Temp. Reyler/Thermostat/Termostat Typ/Type/Tip Reglerstellung/Position/Termostat pozisyonu Schaltwerte/Actma kapama degerleri Valeurs de commutation/Termostat degeri (..abtaven' od)	..ein/acma °C ..aus"/kapama ..alarm'	+4.5 +4.5 -31 -18	
Füllmenge/Fill. quantily/ Dolum miktari	R600 g	88	
Anschlusswert/Comm. load/Giris gucu	W		
Heizung/Heater/Rezistans Widerstand/Resistance/Direnc Leistung/Power/Guc	Ohm W		
Ventilador/Blower/Vantilatör Widerstand/Resistance/Rezistans	Ohm		
Magnetventil/Magnetic valve/Manyetik valf Widerstand/Resistance/Rezistans Spannung/Voltage/Gerilim	Ohm V		
Temp. Reyler/Thermostat/Termostat			

* Siehe Typenschild/Mamul etiketine bakiniz