



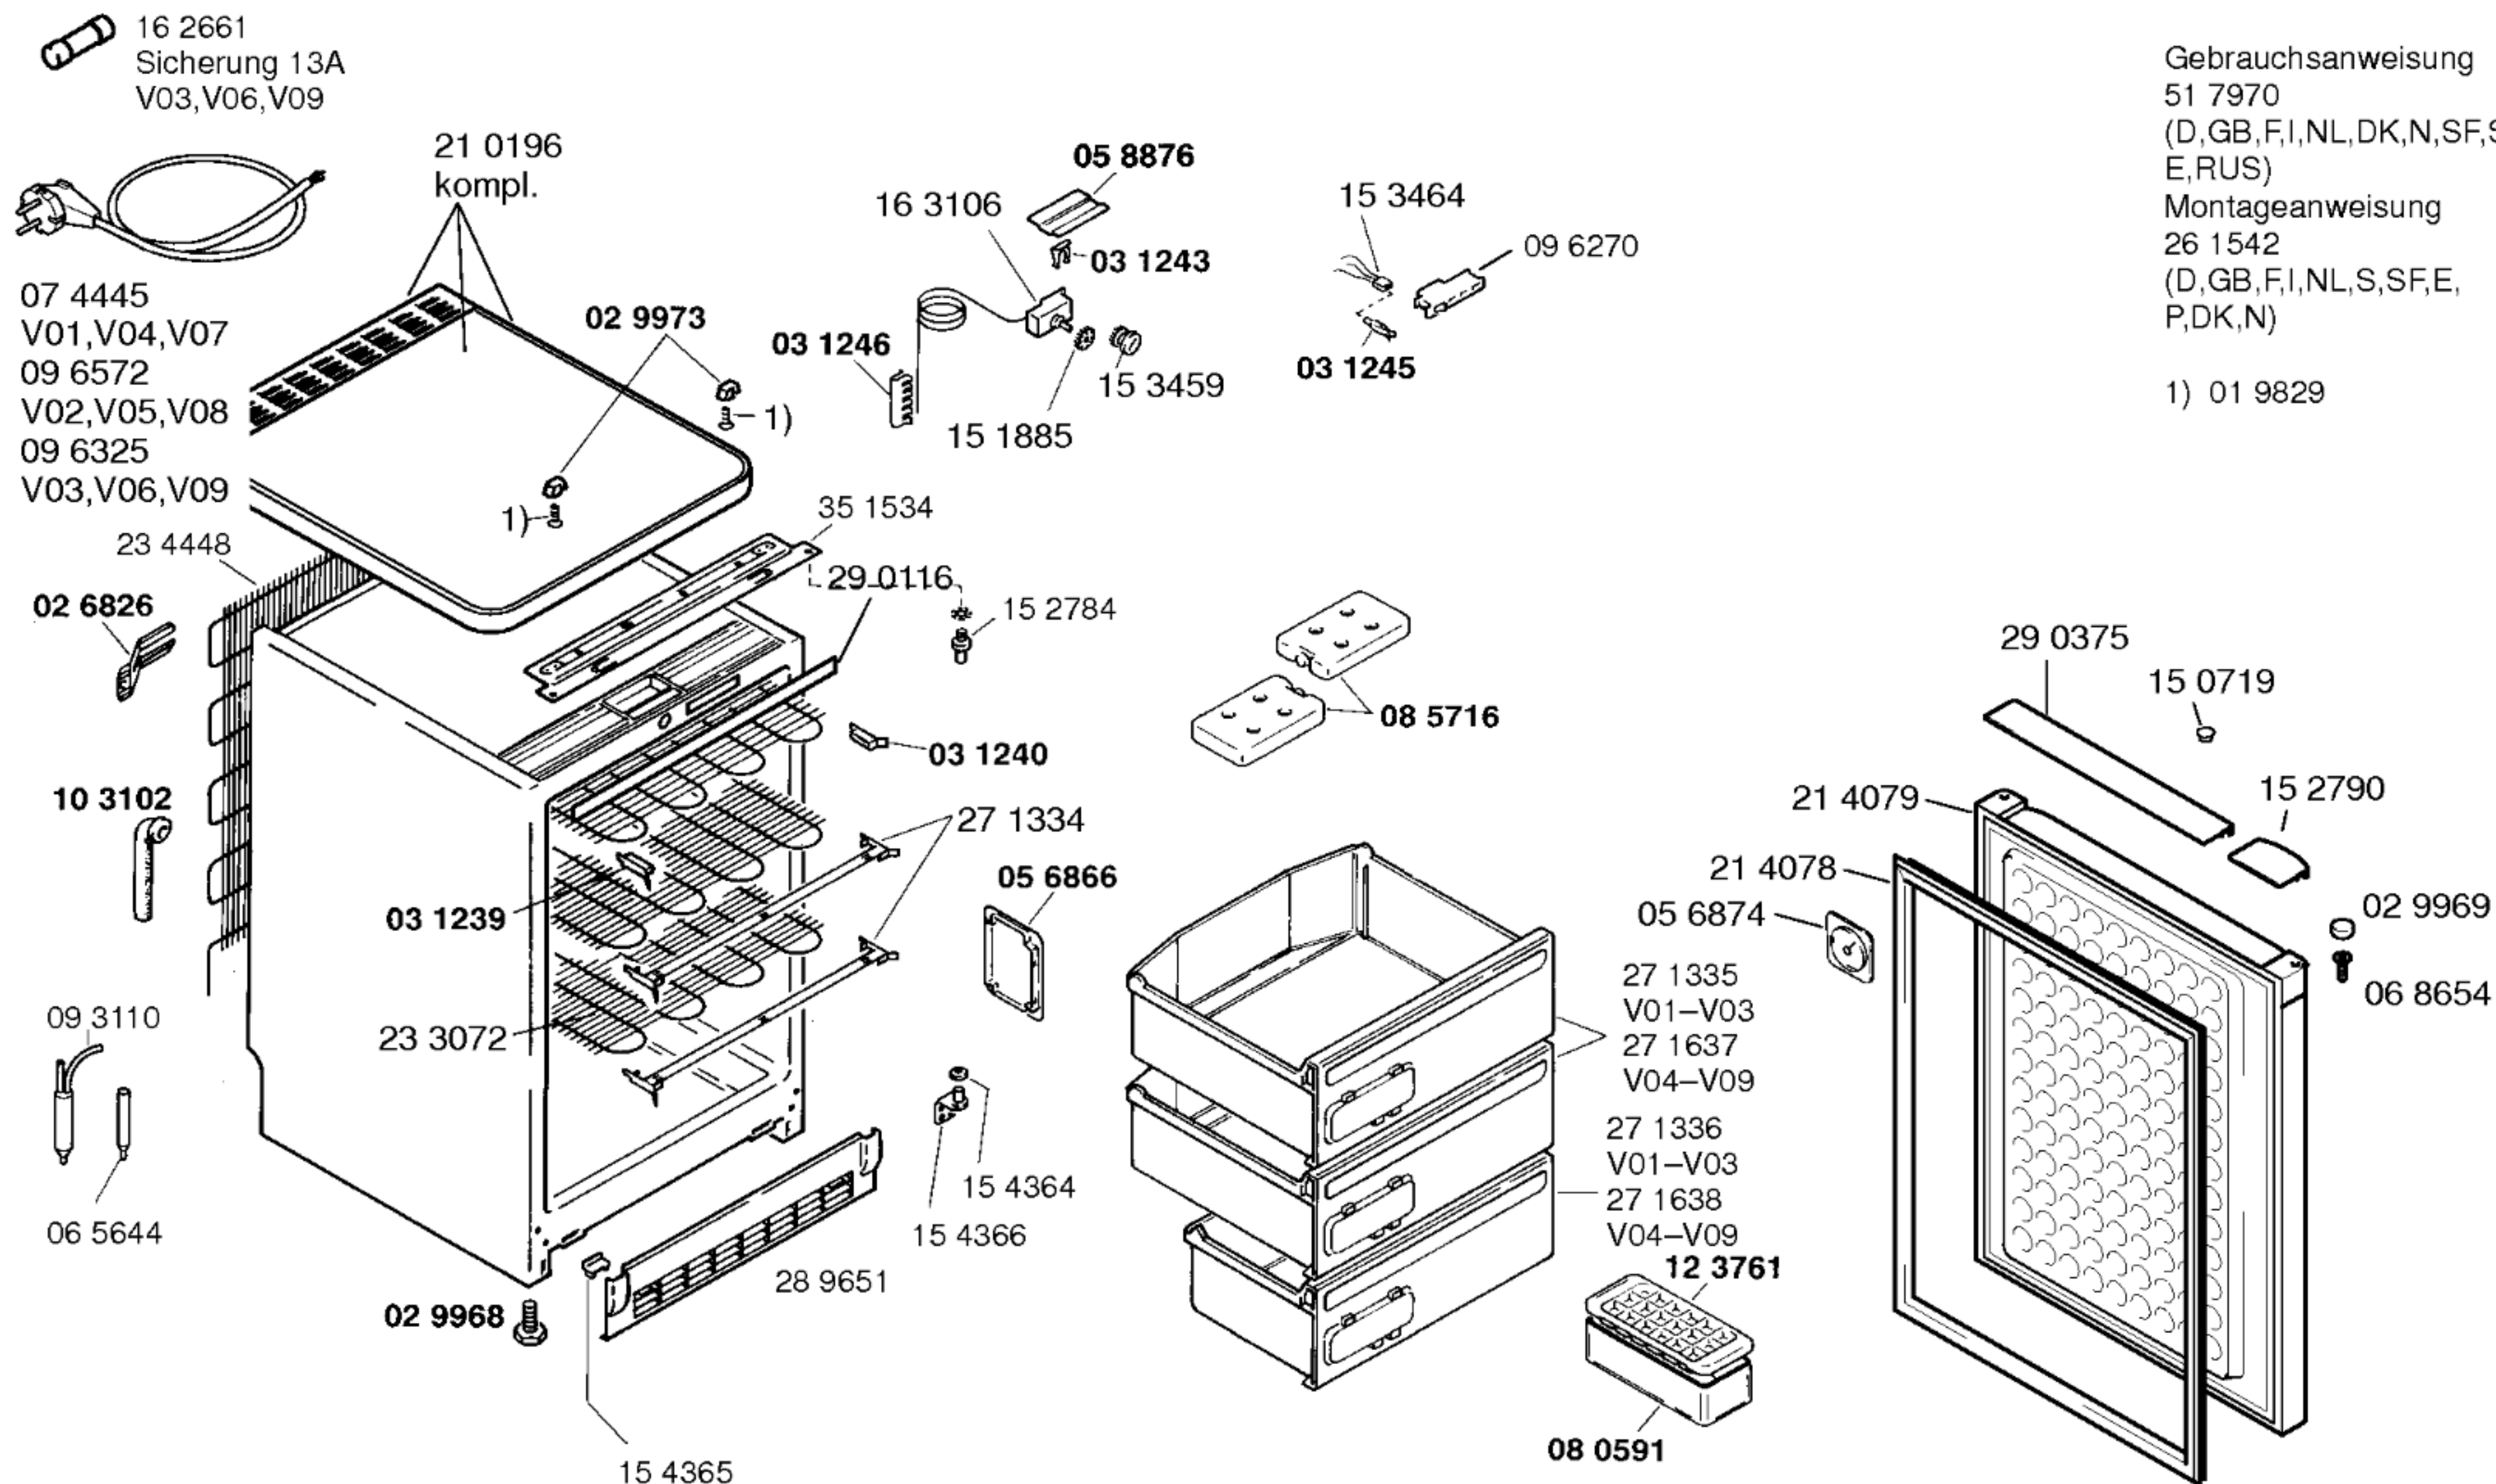

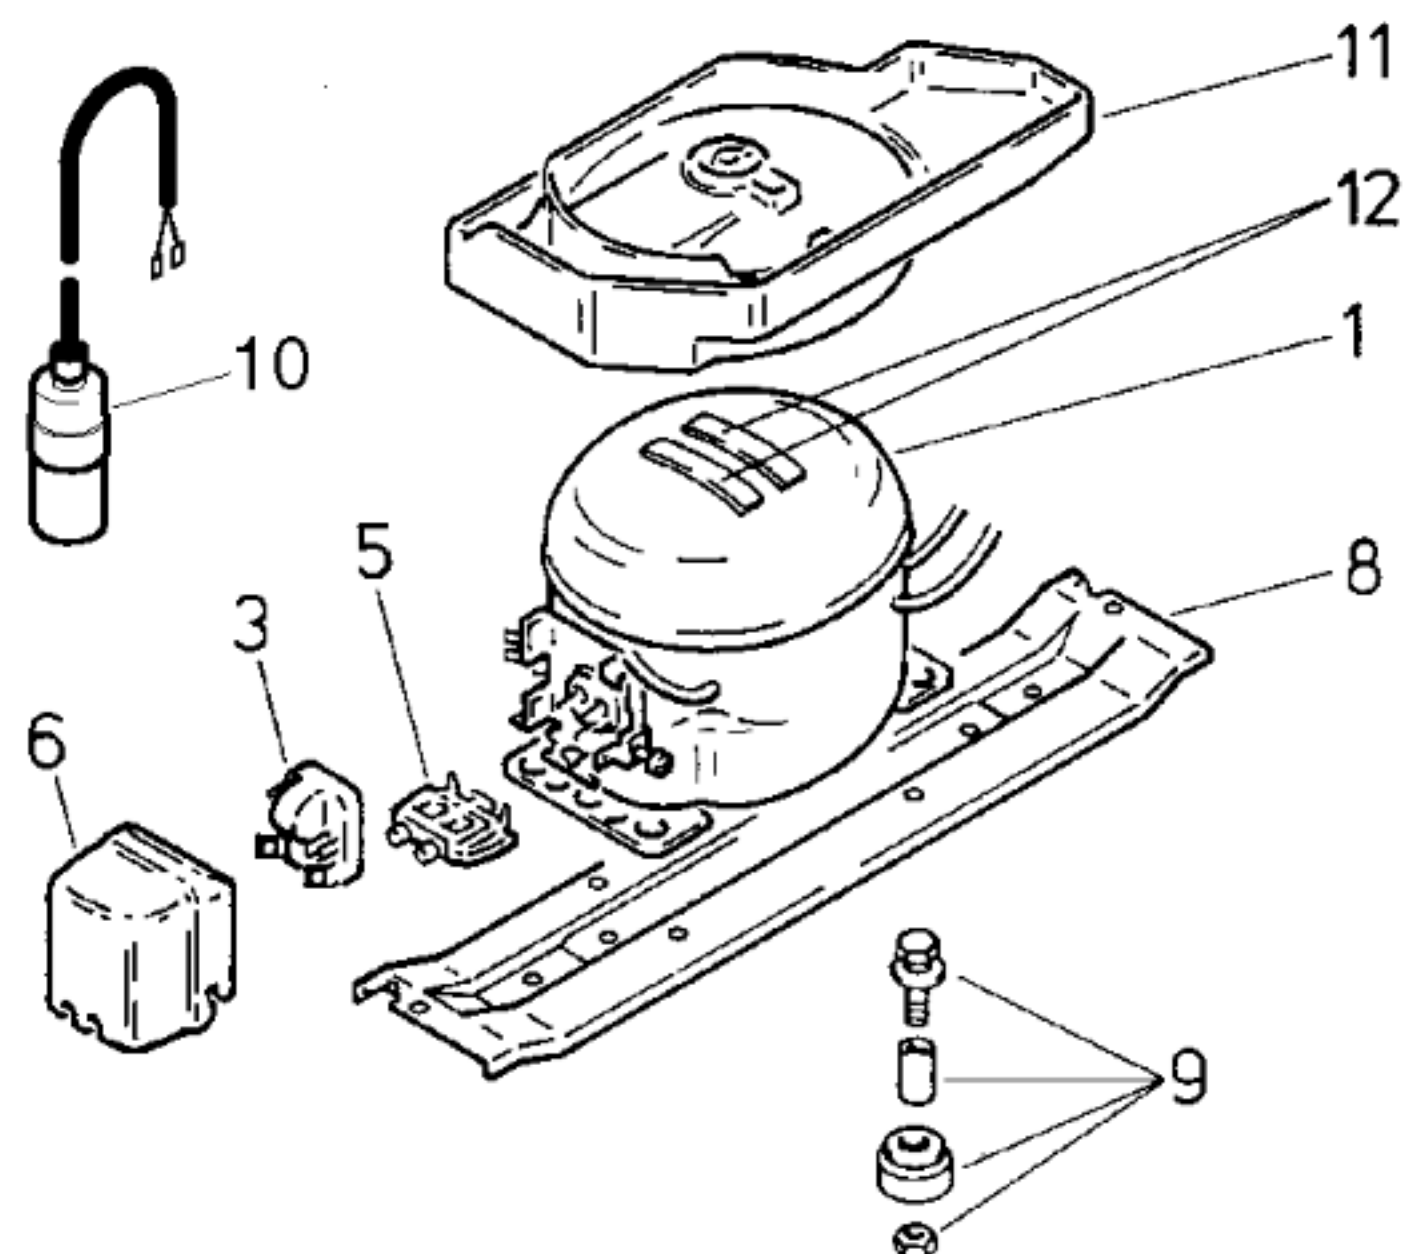

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss		
Typ/Type		TLES 7 K		
Förderleistung/Delivery/Débit		l/h	1168	
Anlaufstrom/Starting current/Cour de démarrage		A	4,5	
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	16,5	
		Hi/aux Ω	16,9	
Temp.-Regler/Thermostat		Danfoss		
Typ/Type		077B2210		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$	-25	-17
Valeurs de commutation		„aus“	-33	-23
		(„abtauen“ od.) „alarm“	-19,5	-13
Füllmenge/Fill.quantity/Charge		R600a g	*	
Anschlußwert/Conn.load/Puiss. connectée		W	78	78
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

* siehe Typenschild

	V01-V03	V04-V06	V07-V09
Pos.	Danfoss	Matsushita	Danfoss
	TLES 7 K	SD 65 E80	TLES 7 K
1	14 1585	14 1981	14 1879
2			
3	15 1055	15 3306	15 1055
4			
5	15 0760	15 3865	15 0760
6	15 1072	15 3303	15 1072
7			
8	27 0833	27 0833	27 0833
9	05 0166	05 0166	05 0166
10			
11			
12			