



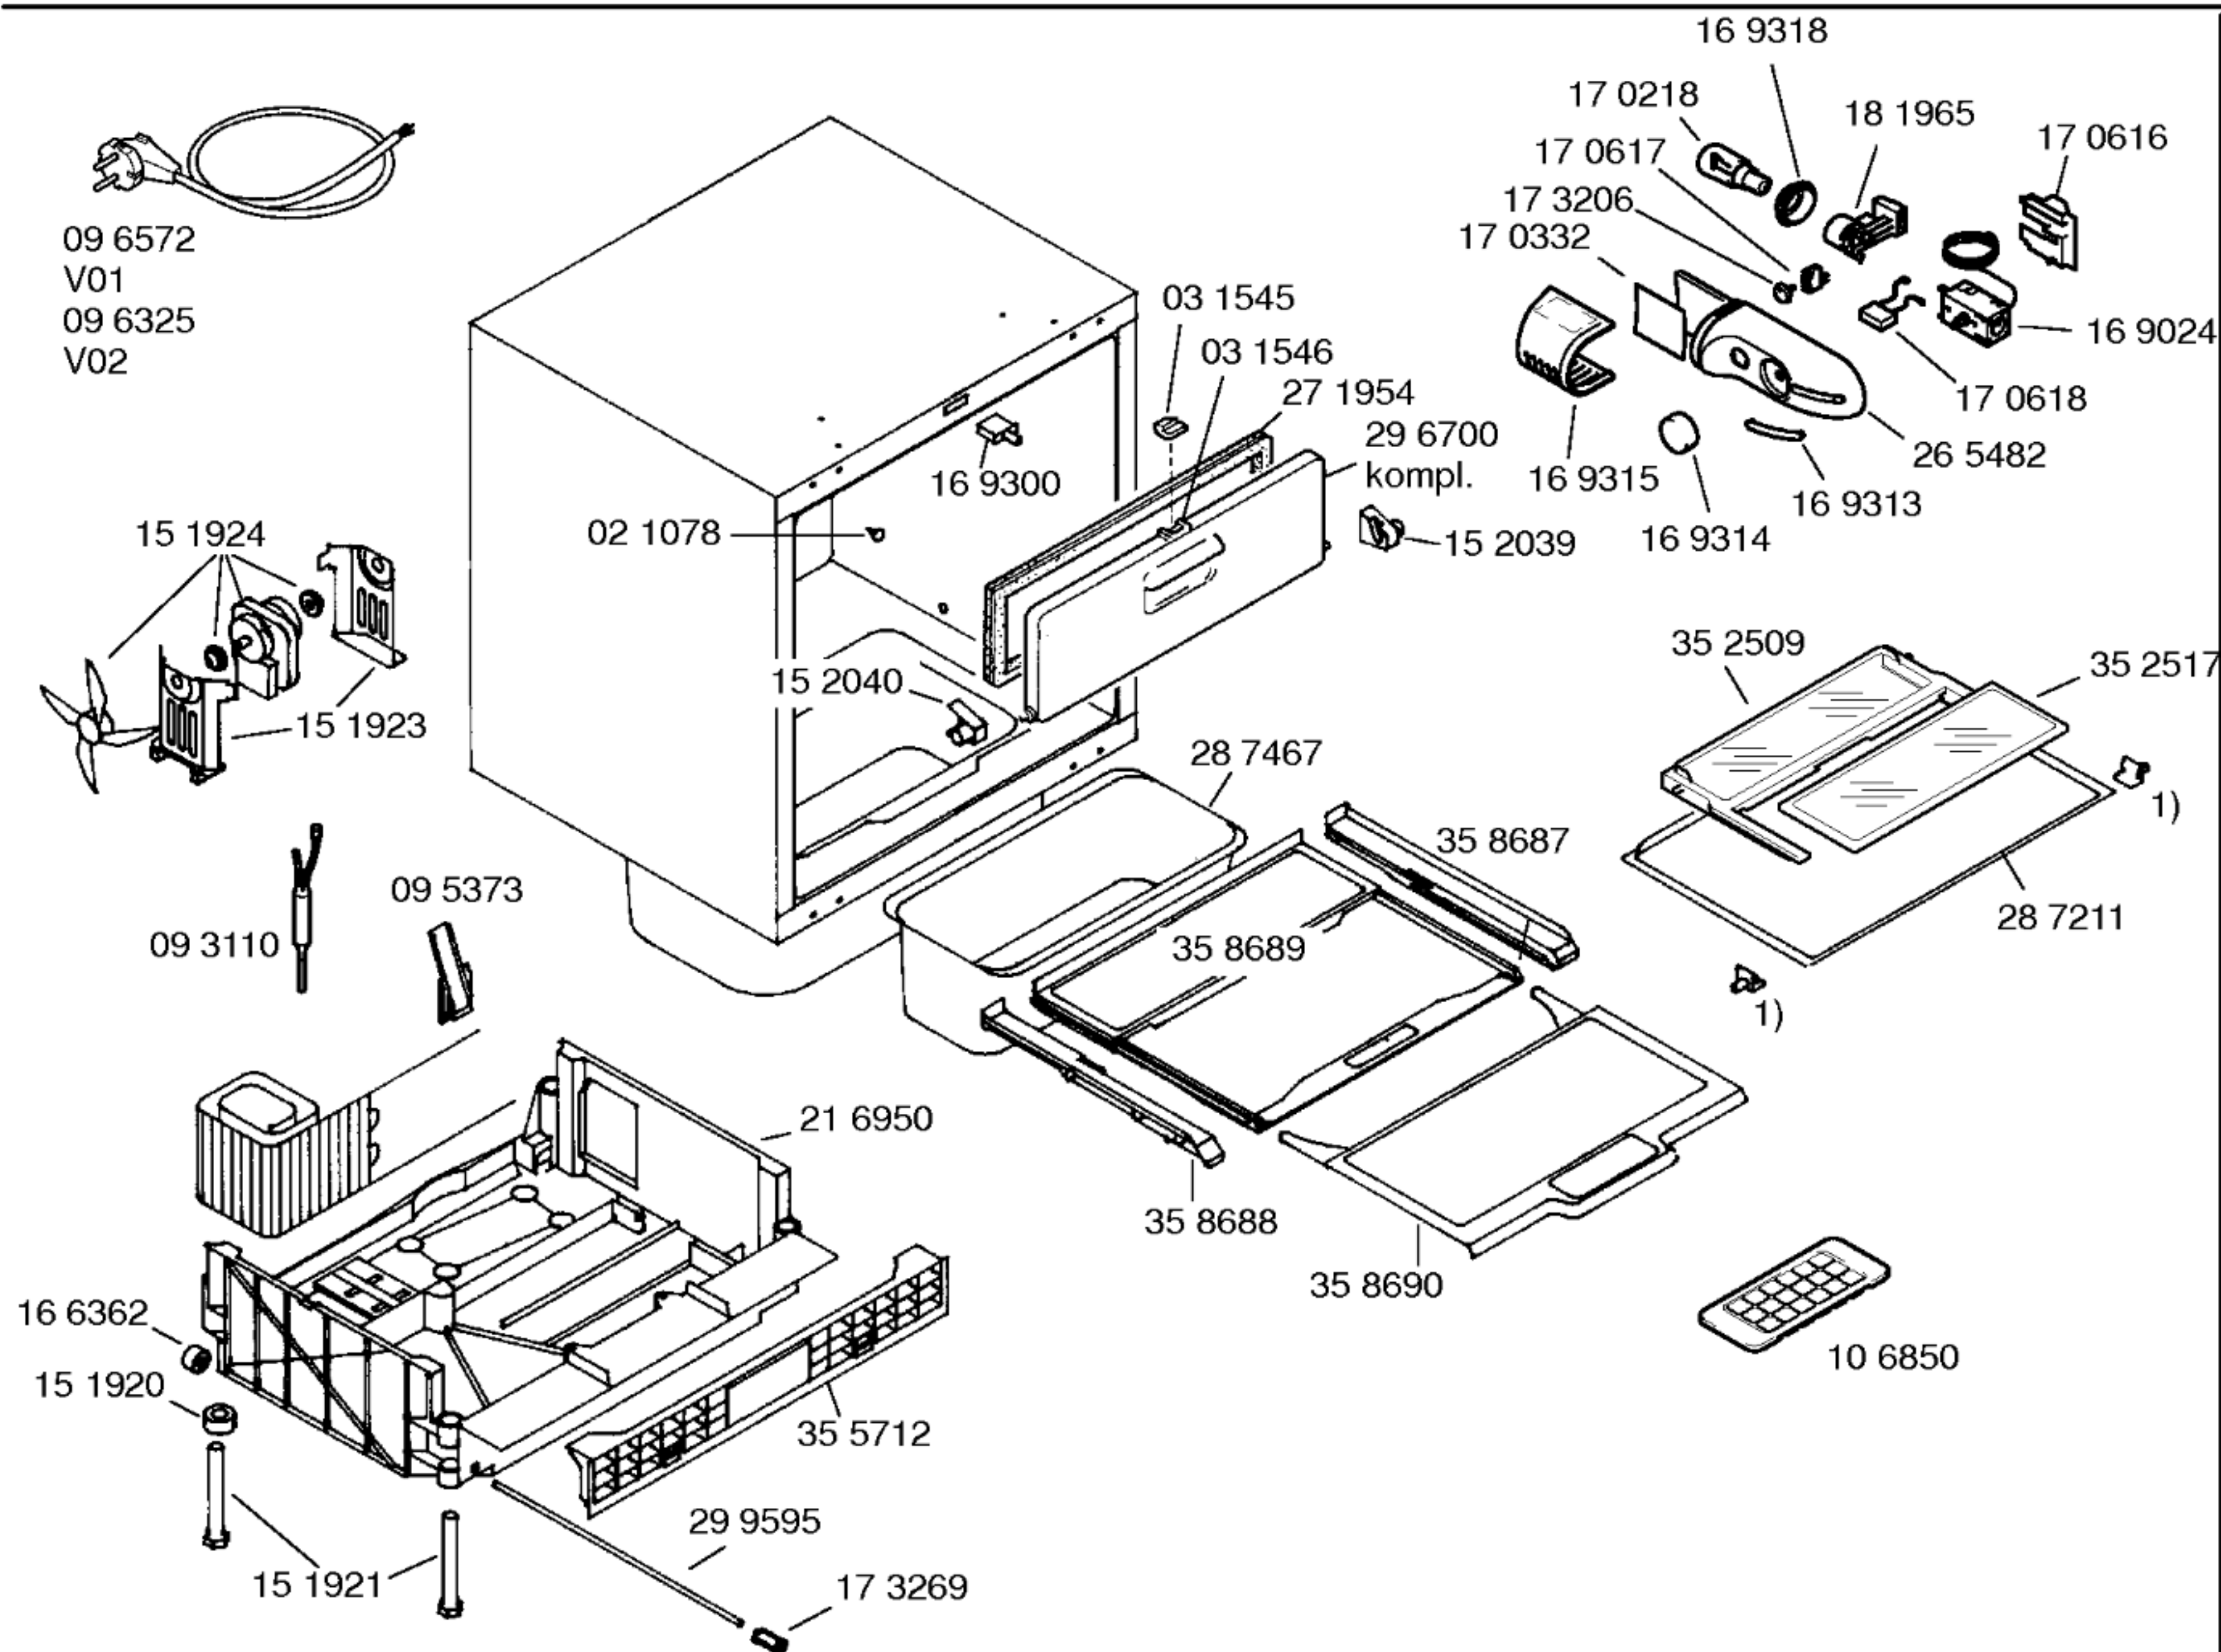


Mat. - Nr. - Konstante
3740

Gebrauchsanweisung
52 3493
Montageanleitung
52 3494
Beistellsatz
26 8429

1) 16 5789

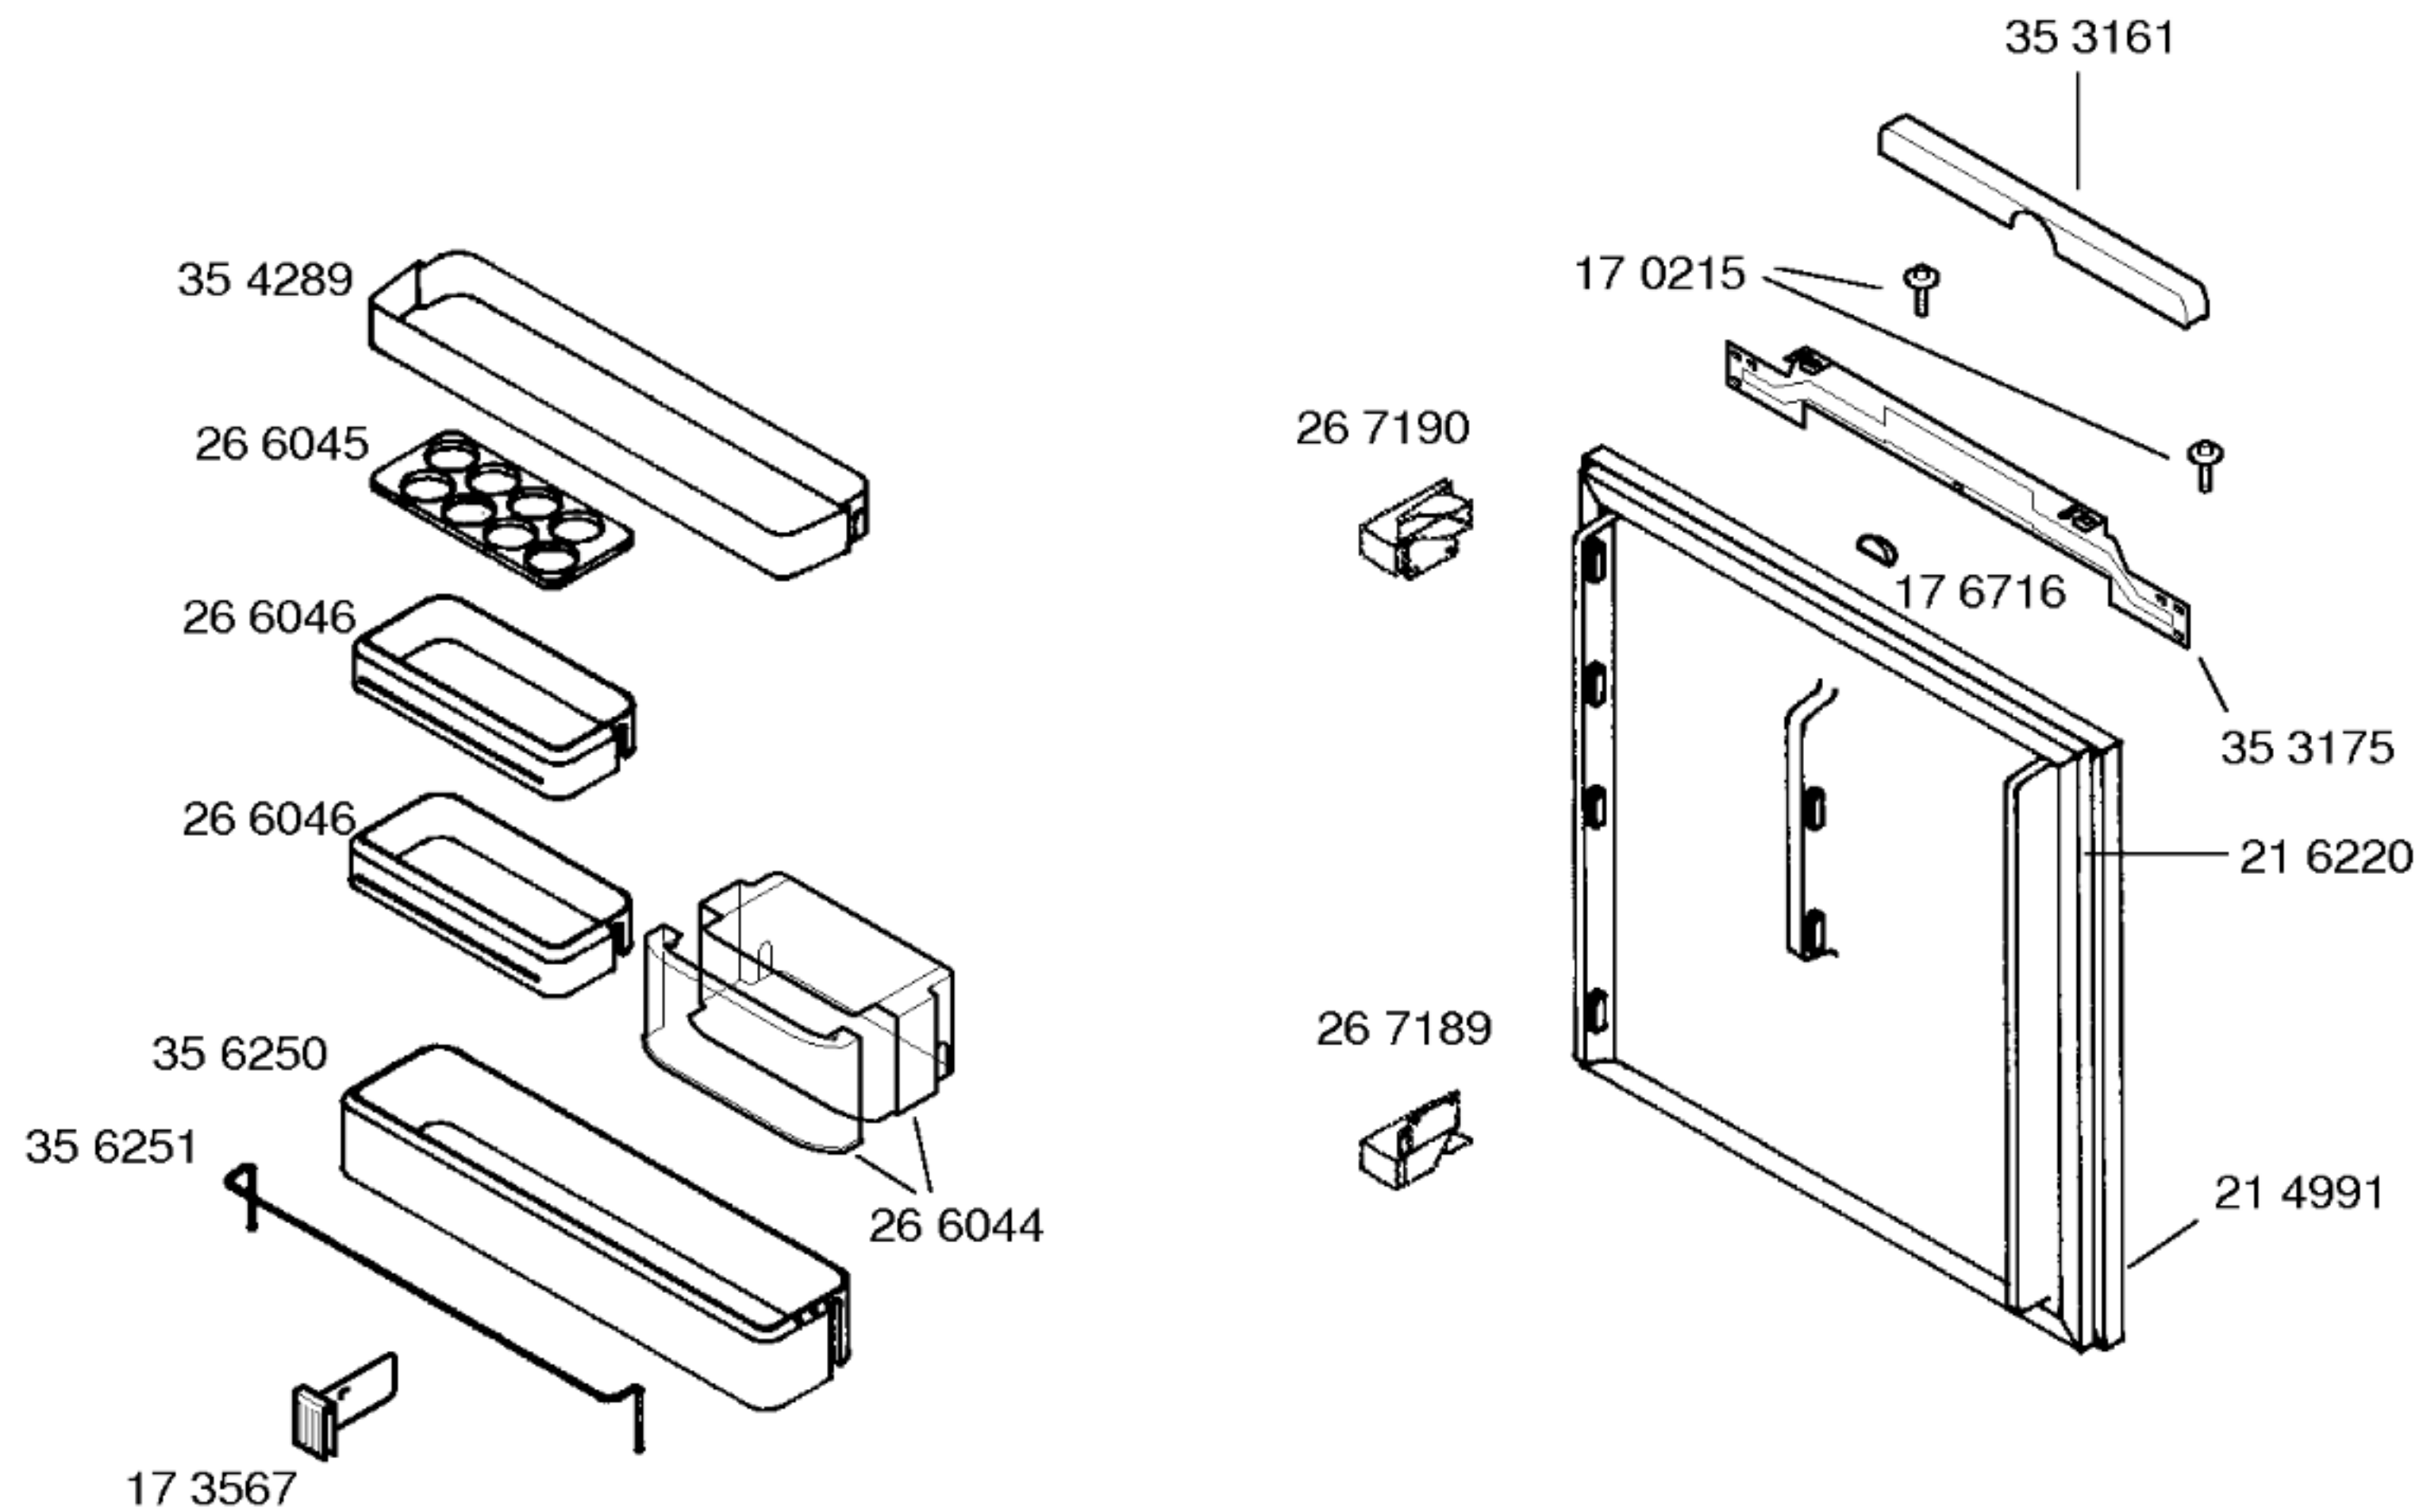

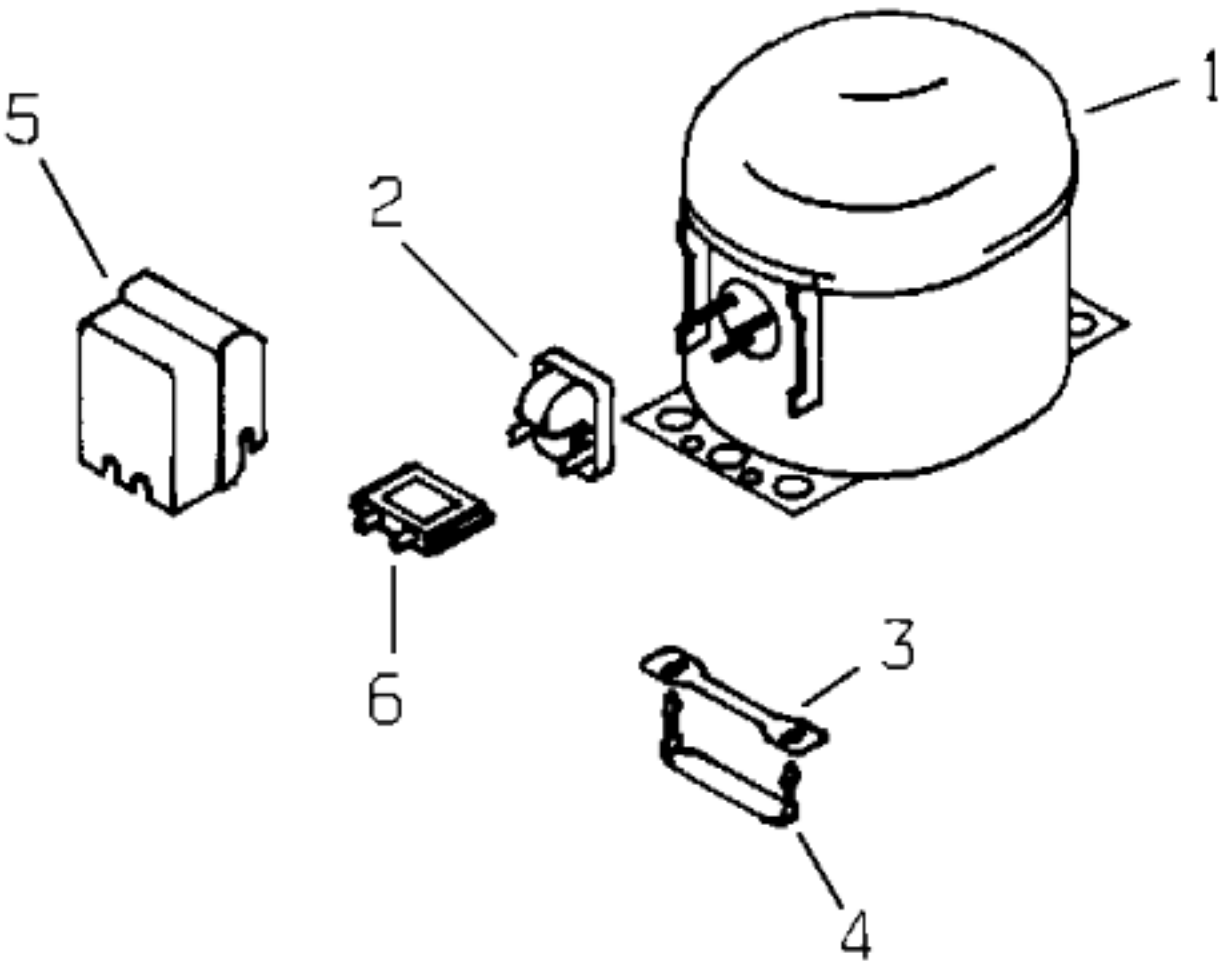

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur		Danfoss	Matsushita
Typ/Type		TLES 7 KK2	ESS 60E
Förderleistung/Delivery/Débit		l/h	1076
Anlaufstrom/Starting current/Cour de démarrage		A	5,6
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	30,6
		Hi/aux Ω	26,7
Temp.-Regler/Thermostat		Ranco	
Typ/Type		K 59	
Reglerstellung/Position		kalt warm	
Schaltwerte/Switching values/		+5 +5	
Valeurs de commutation		-28 -17	
		„abtauen“ od.)	„alarm“
Füllmenge/Fill.quantity/Charge		R600a	g
		*	
Anschlußwert/Conn.load/Puiss. connectée		W	75
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance		Ω	
Leistung/Power/Puissance		W	
Ventilator/Blower/Ventilateur		MES F61-10	
Widerstand/Resistance/Résistance		680	
Schaltuhr/Timer/Minuterie de contact			
Widerstand/Resistance/Résistance		Ω	
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance		Ω	
Spannung/Voltage/Tension		V	

* siehe Typenschild

Pos.	V01,V02	V03,V04	
	Danfoss	Matsushita	
	TLES 7 KK2	ESS 60E	
1	14 1903	14 21 58	
2	15 1055	18 3589	
3	18 3656	18 3656	
4	18 3655	18 3655	
5	15 1072	15 1072	
6	15 0760	15 0760	
7			
8			
9			
10			
11			
12			