



07 4445

35 4305

16 9300

48 1572
Set

35 2470

15 3429

35 3208
kompl.

02 9965

029966

05 9129

09 2894


02 9963

23 5128


09 3110



06 5644

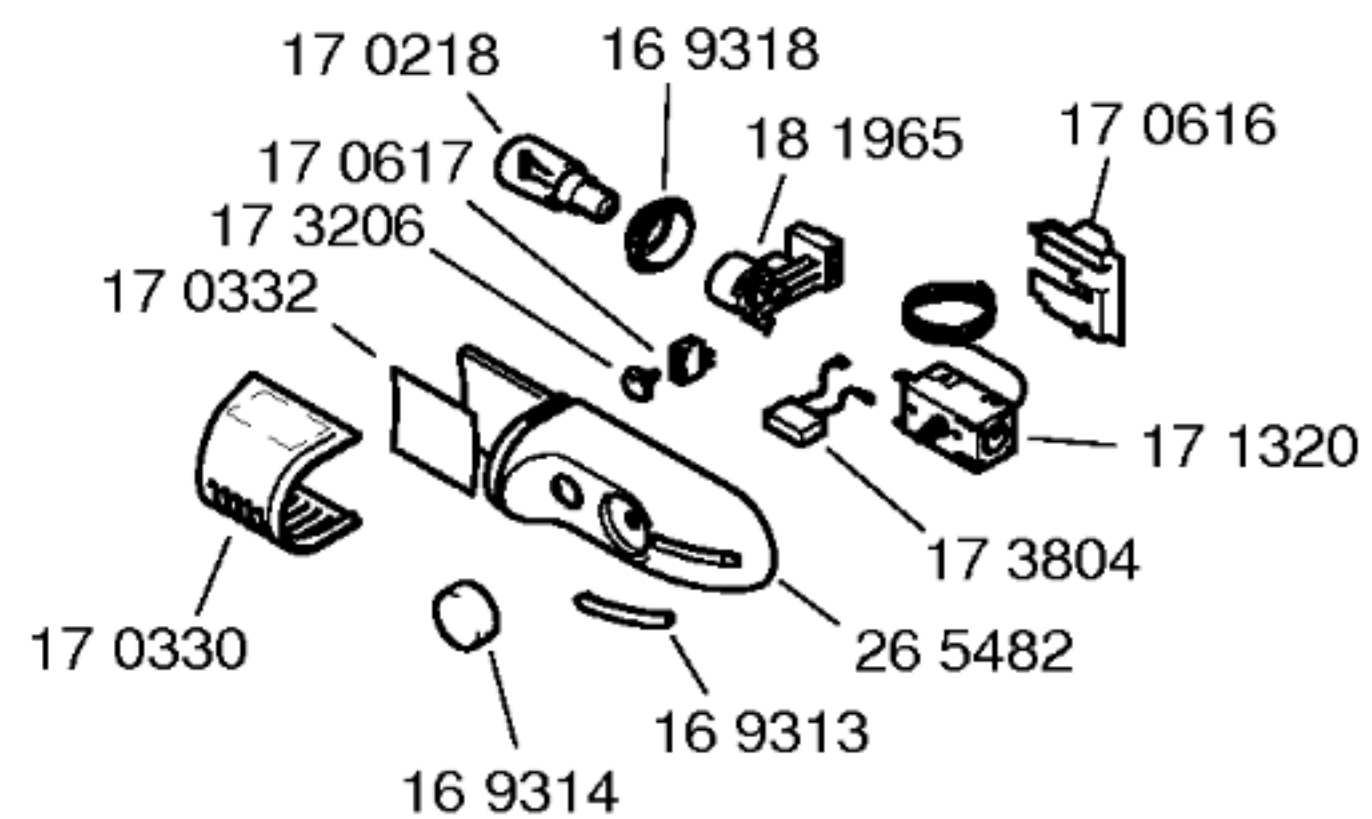

Gebrauchsanweisung
59 0242
(de,en,it,nl)
Montageanleitung
52 3227
Beistellsatz
26 6056

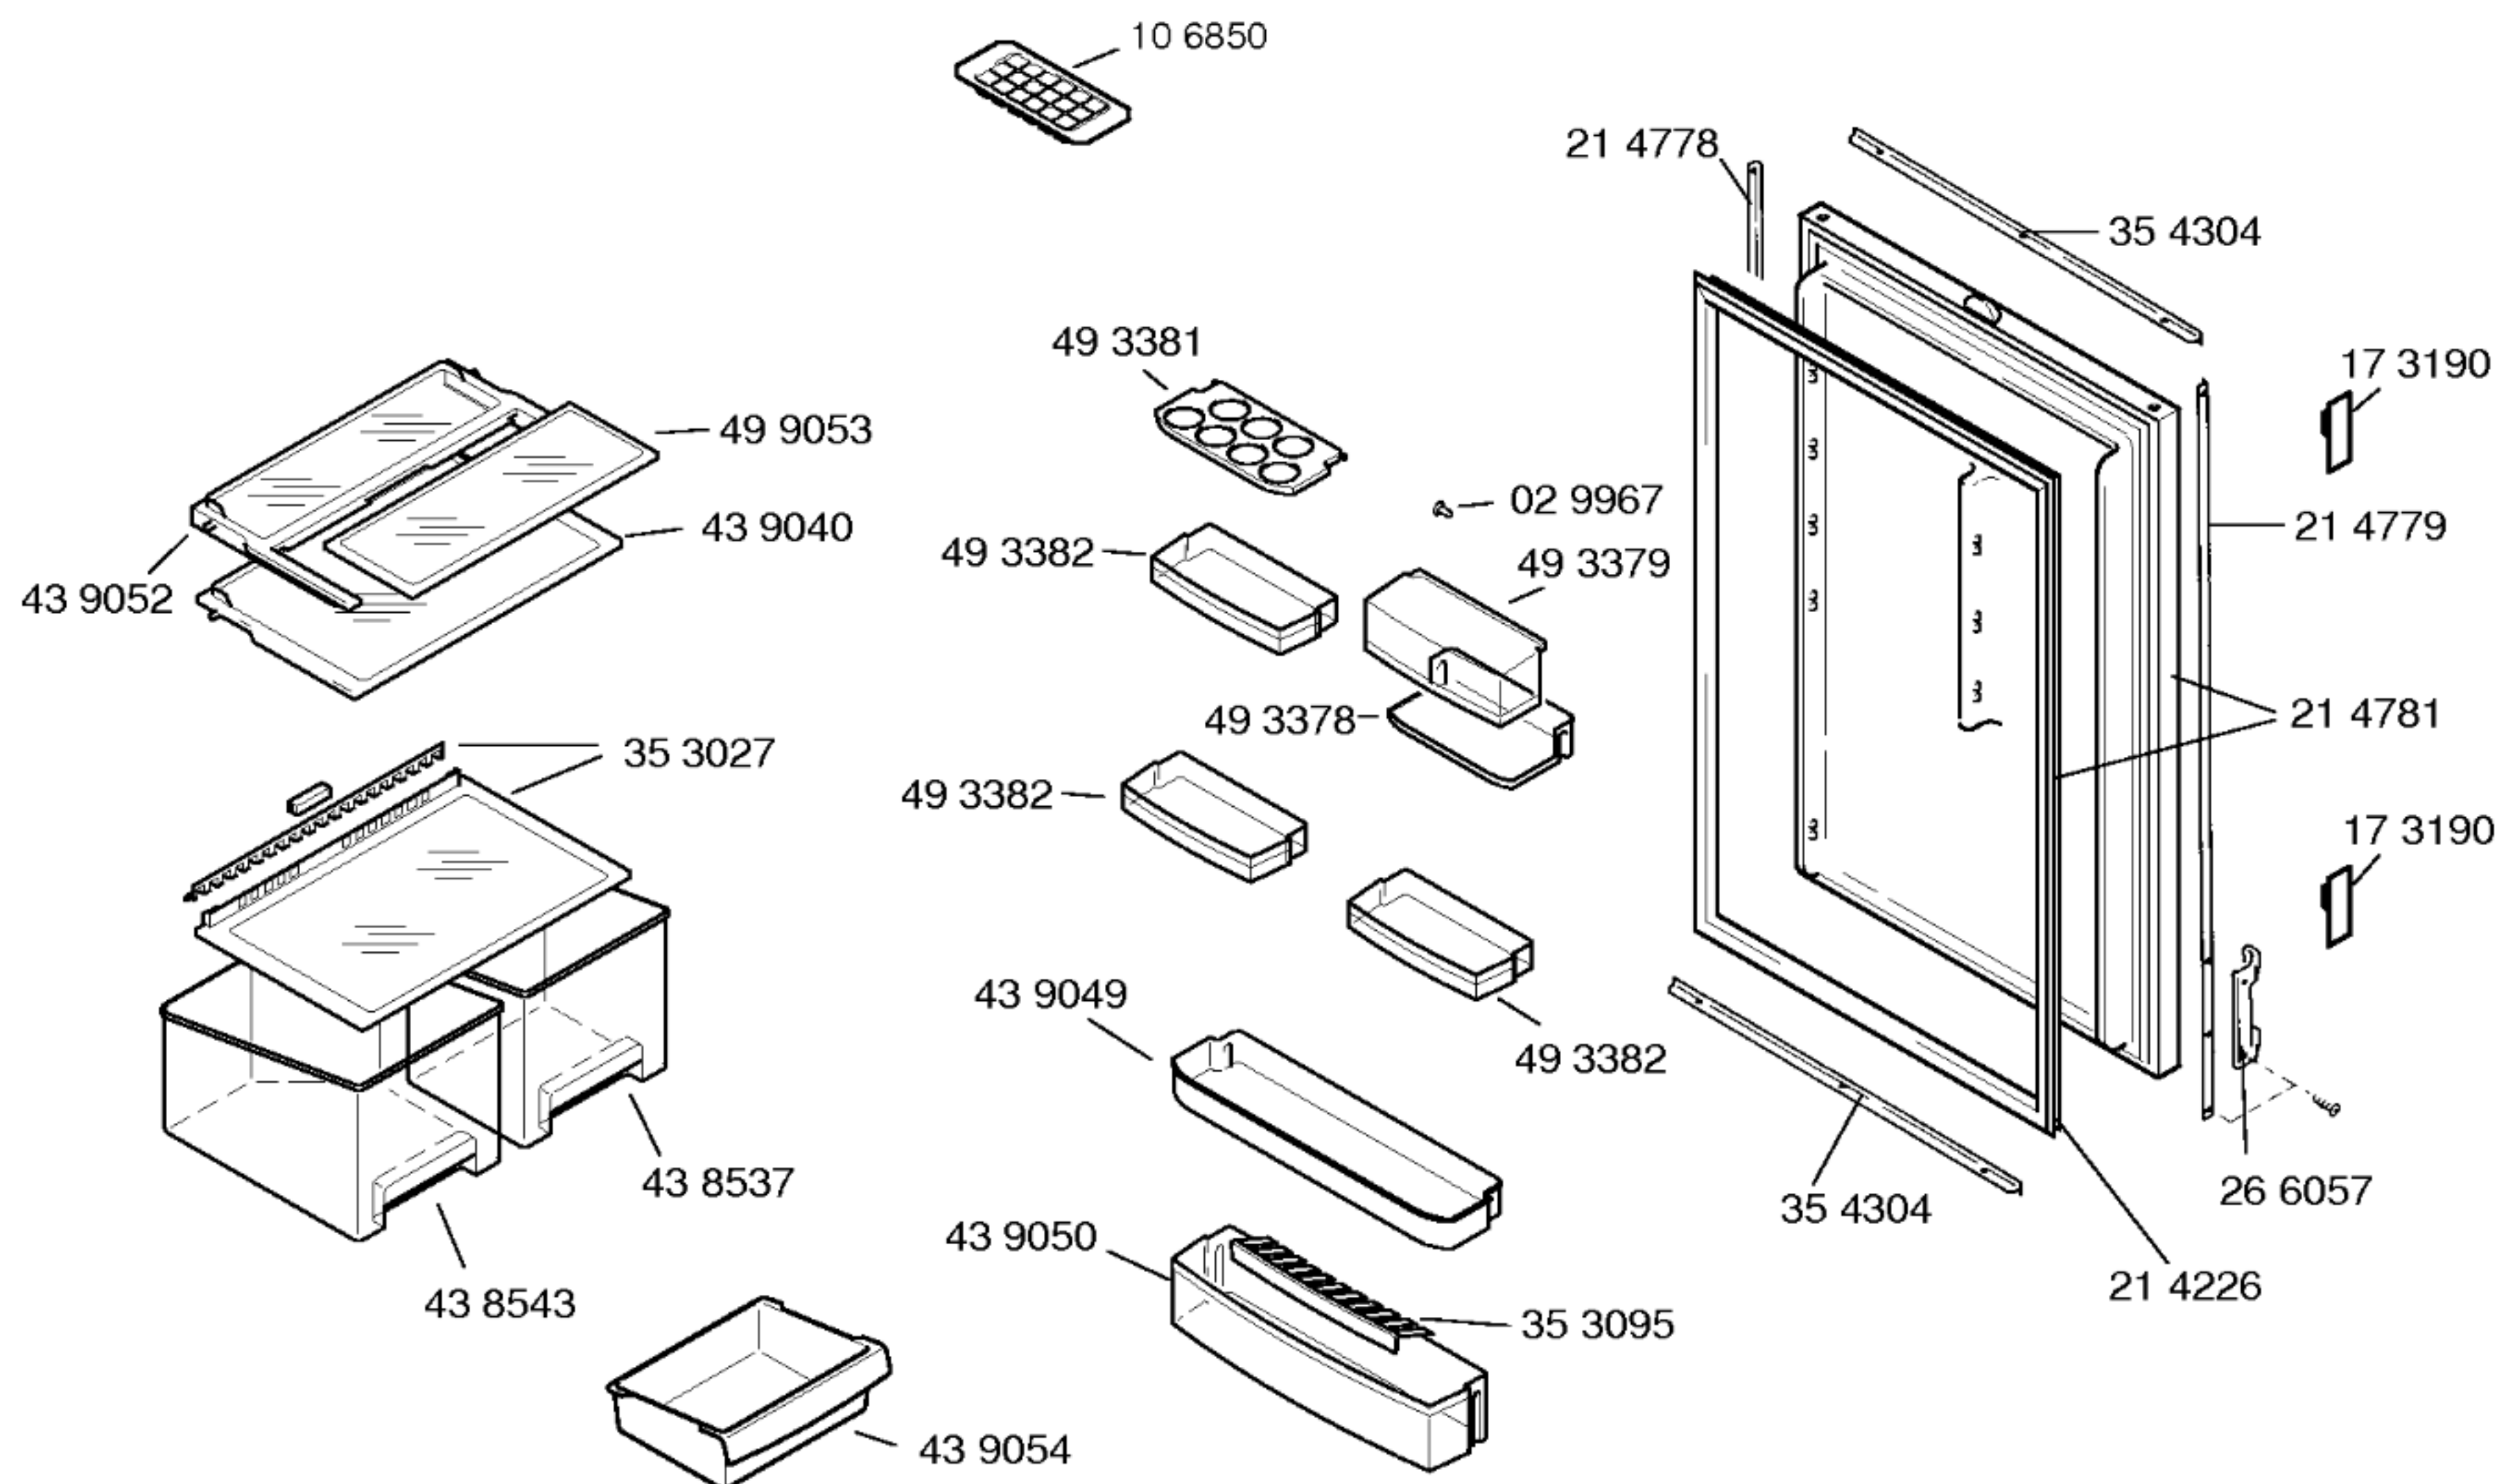
Ausgleichsblenden
braun

Z4210B1 37mm

Z4220B1 57mm

Alu

Z4210A1 37mm

Z4220A1 57mm


Dekorrahmen

braun

Z4130B1 880mm

Z4160B1 1225mm

Torx-Schraube 3,5x16
für Dekorrahmen
17 3166

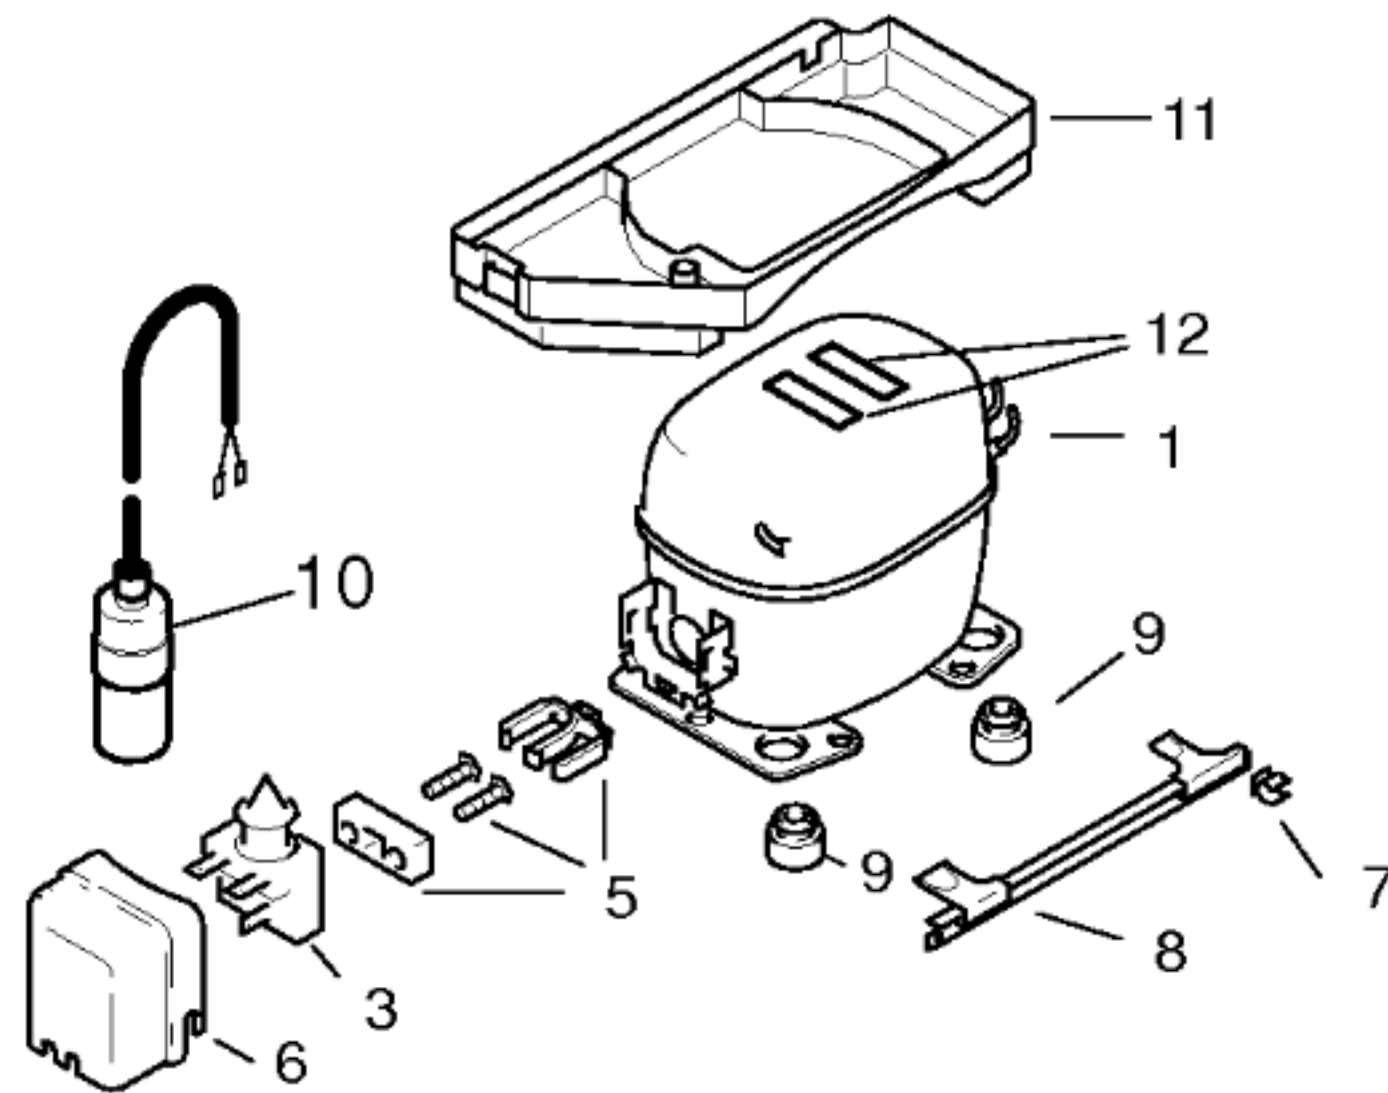

	V01		
Pos.	Danfoss		
	TLY 6 KK2		
1	14 2058		
2			
3	15 1055		
4			
5	15 0760		
6	15 1072		
7	16 9319		
8	27 1375		
9	05 0166		
10			
11	35 4549		
12	05 6008		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur		Danfoss	
Typ/Type		TLY 6 KK2	
Förderleistung/Delivery/Débit	l/h	1026	
Anlaufstrom/Starting current/Cour de démarrage	A	4,4	
Widerstand/Resistance/Résistance	Ha/main/prin	34,0	
	Hi/aux	31,0	
Temp.-Regler/Thermostat		Ranco	
Typ/Type		K59	
Regelstellung/Position		kalt	warm
Schaltwerte/Switching values	"warm"	+5,2	+5,2
Valeurs de commutation	"kalt"	-32,0	-15,0
Füllmenge/Fill.quantity/Charge		R600a	
		*	
Anschlußwert/Conn.load/Puiss. connectée		W	68
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	W		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	W		
Temp.-Regler/Thermostat			
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	W		
Spannung/Voltage/Tension	V		

* siehe Typenschild