



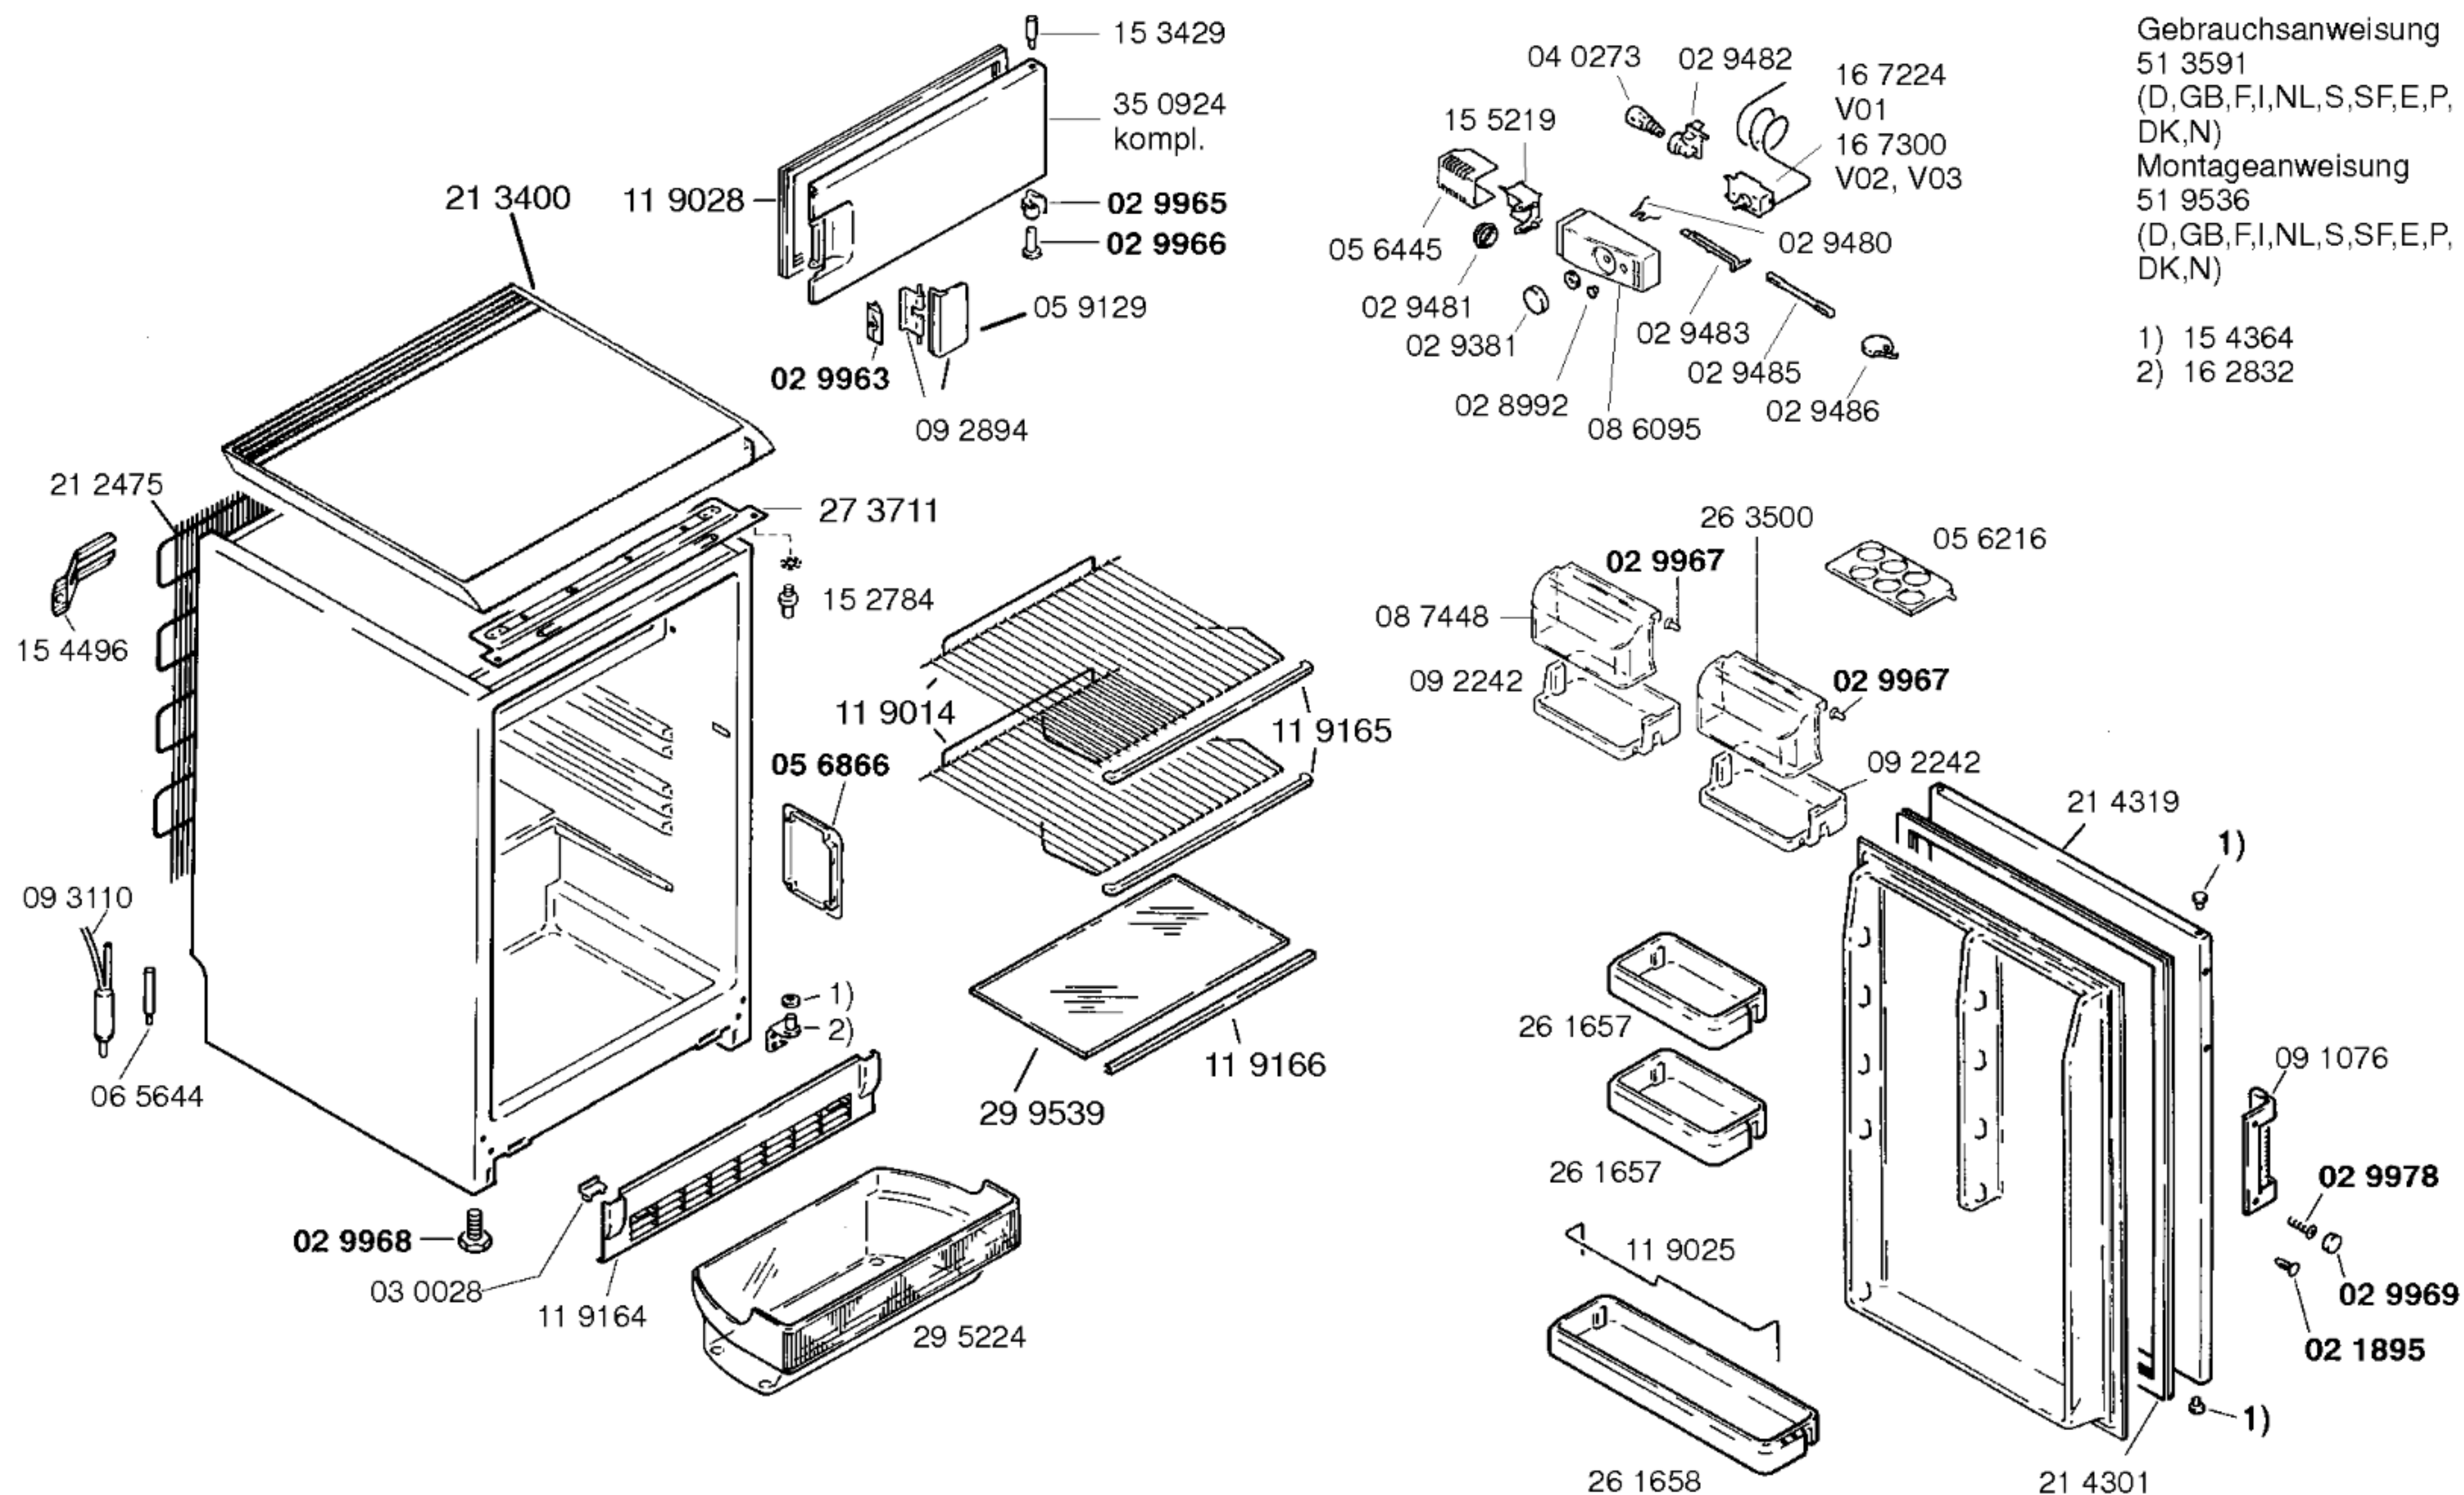

Gebrauchsanweisung
51 3591
(D,GB,F,I,NL,S,SF,E,P,
DK,N)
Montageanweisung
51 9536
(D,GB,F,I,NL,S,SF,E,P,
DK,N)

- 1) 15 4364
- 2) 16 2832

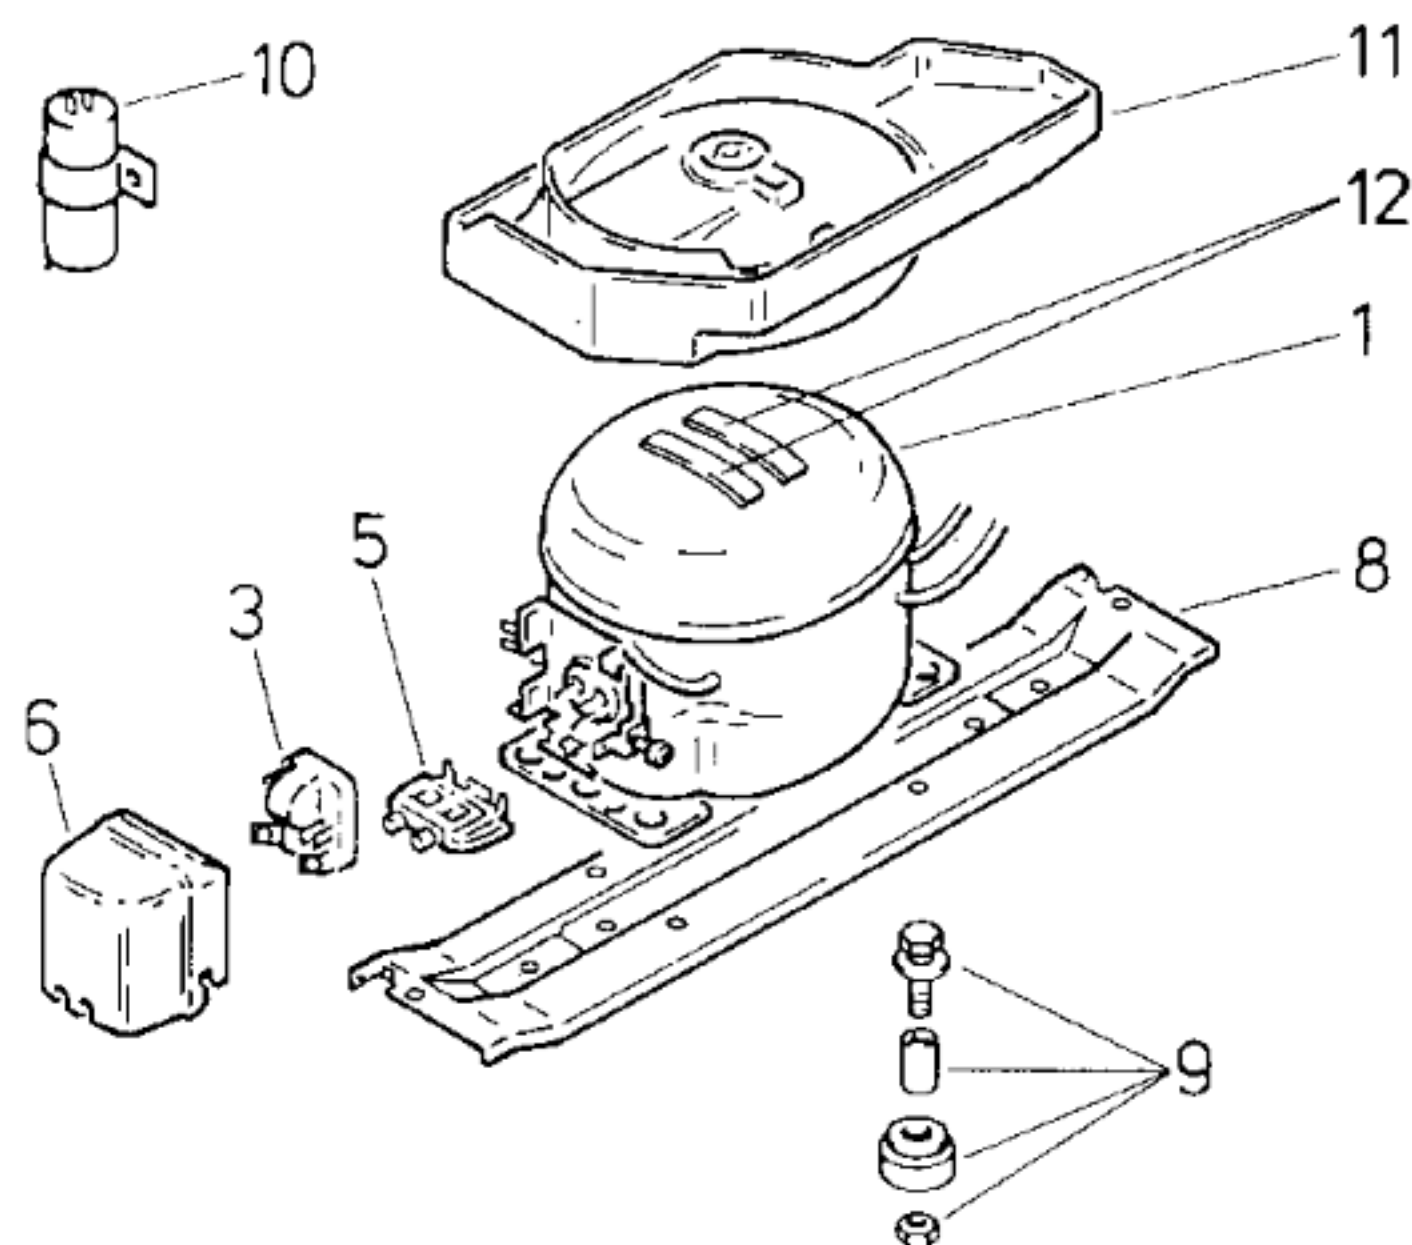

	V01,V02,V03	V04	V05
Pos.	Matsushita	Danfoss	Goldstar
	SD65E	TLES 6K	ND62NAEM
1	14 1316	14 1904	14 2037
2			
3	15 3306	15 1055	17 4893
4			17 0746
5	15 3865	15 0760	17 0745
6	15 3303	15 1072	17 0744
7			16 9319
8	27 0833	27 0833	27 0833
9	05 0166	05 0166	05 0166
10			
11	26 1981	08 4744	08 4744
12	05 6008		05 6008

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita	Danfoss	Goldstar
Typ/Type		SD65E	TLES 6K	ND62NAEM
Förderleistung/Delivery/Débit		l/h	1026	1242
Anlaufstrom/Starting current/Cour de démarrage		A	8,5	2,2
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	25,7	29,5
		Hi/aux Ω	15,7	21,0
Temp. Regler/Thermostat				
Typ/Type				
Reglerstellung/Position				
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$		
Valeurs de commutation		„aus“		
		(„abtauen“ od.) „alarm“		
Füllmenge/Fill.quantity/Charge		R600a	g	*
Anschlußwert/Conn.load/Puiss. connectée		W	69	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

* siehe Typenschild