

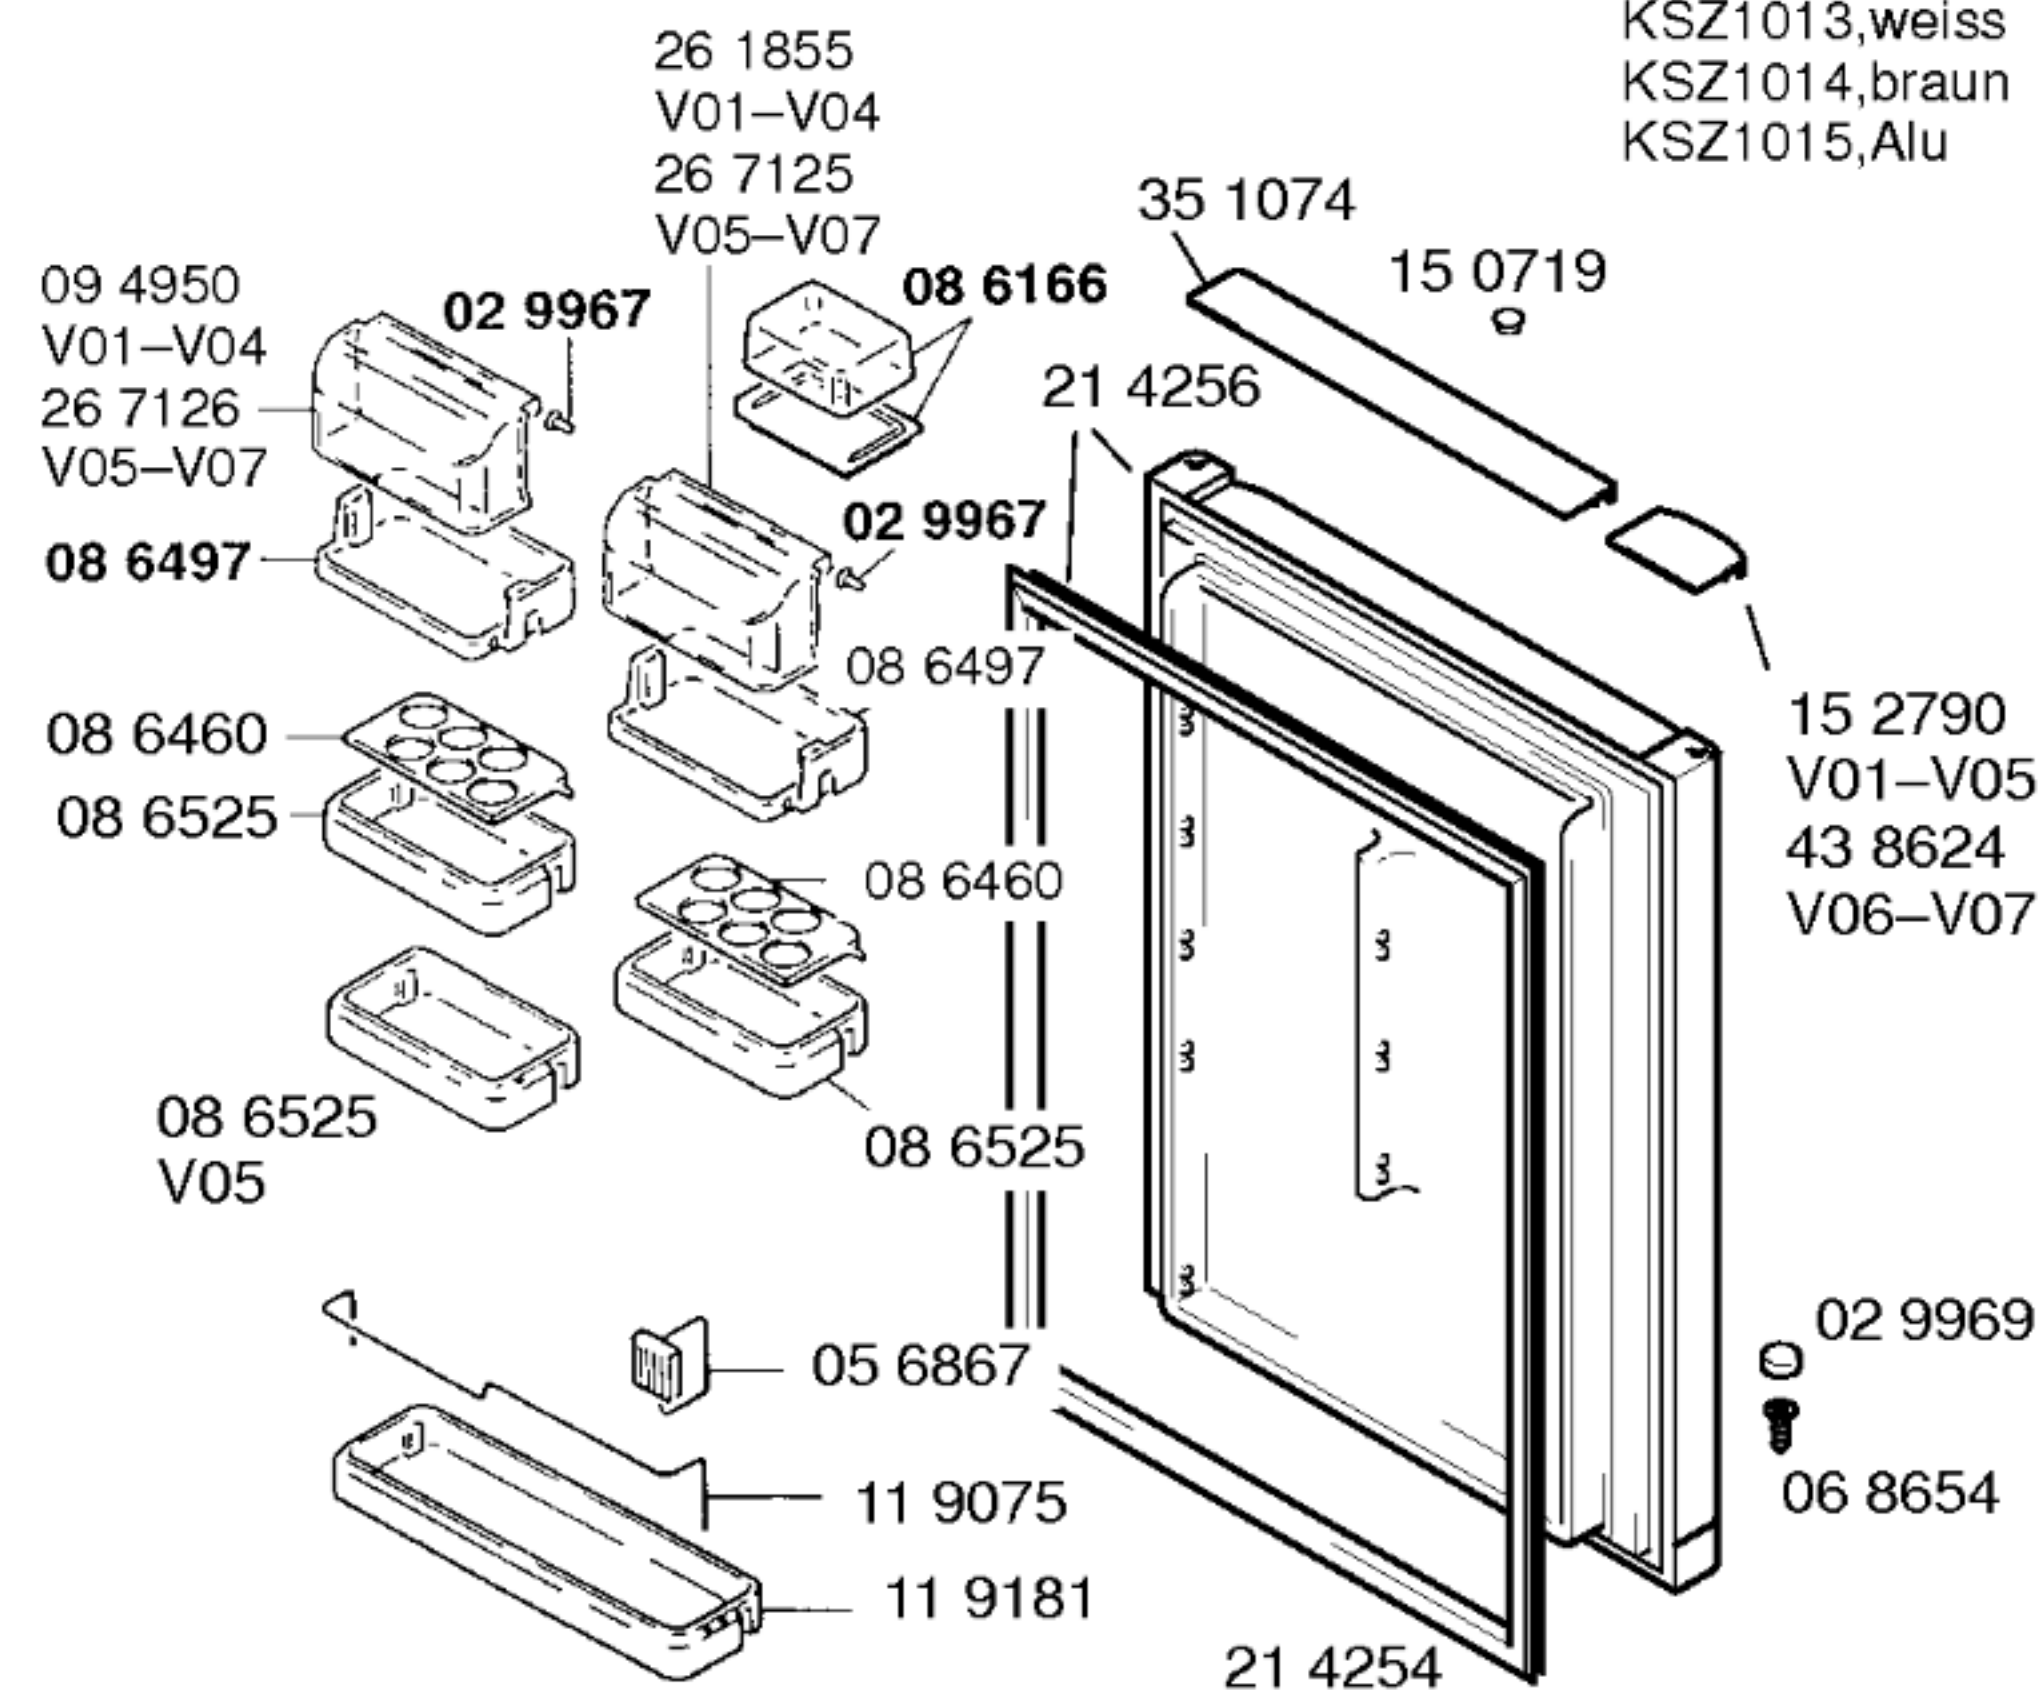
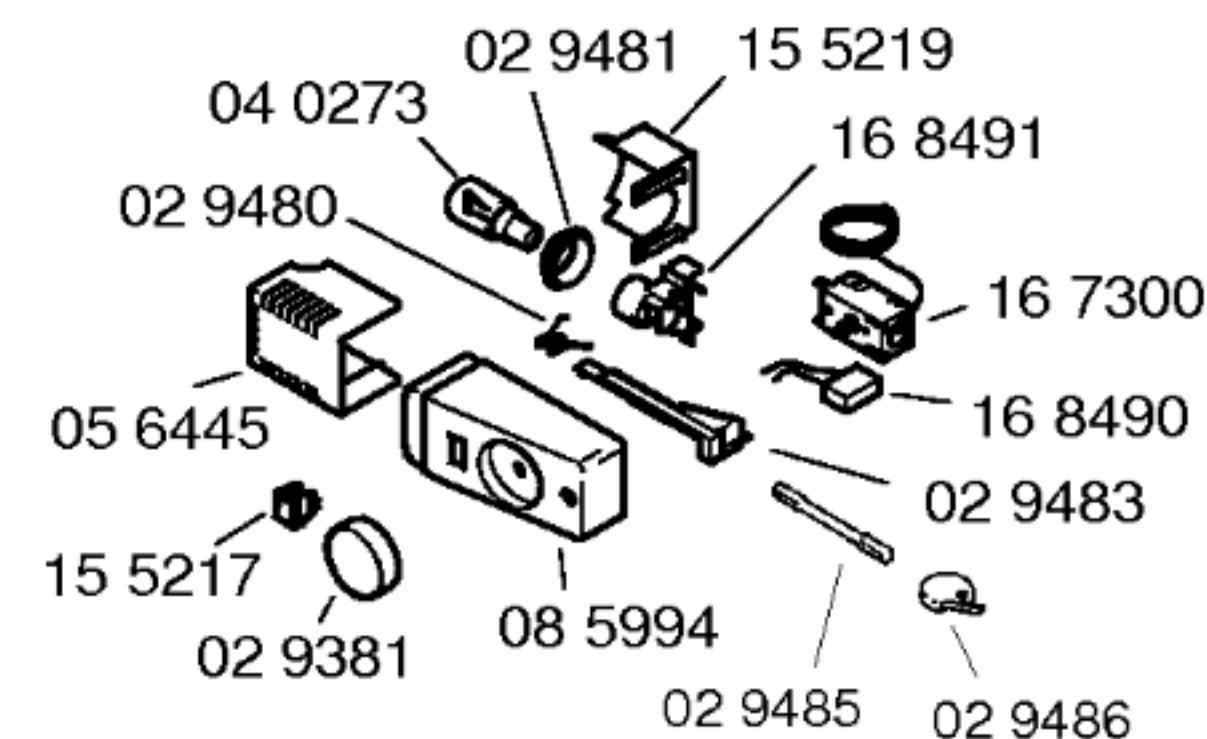


Ident - Nummern - Konstante
3740

Gebrauchsanweisung
51 3590
(D,GB,F,I,NL,S,SF,E,P,
DK,N)
Montageanweisung
26 1542
(D,GB,F,I,NL,S,SF,E,P,
DK,N)
1) 01 9257
2) 15 4364
3) 15 4366

Zubehör:
Dekorrahmen
KSZ1013, weiss
KSZ1014, braun
KSZ1015, Alu

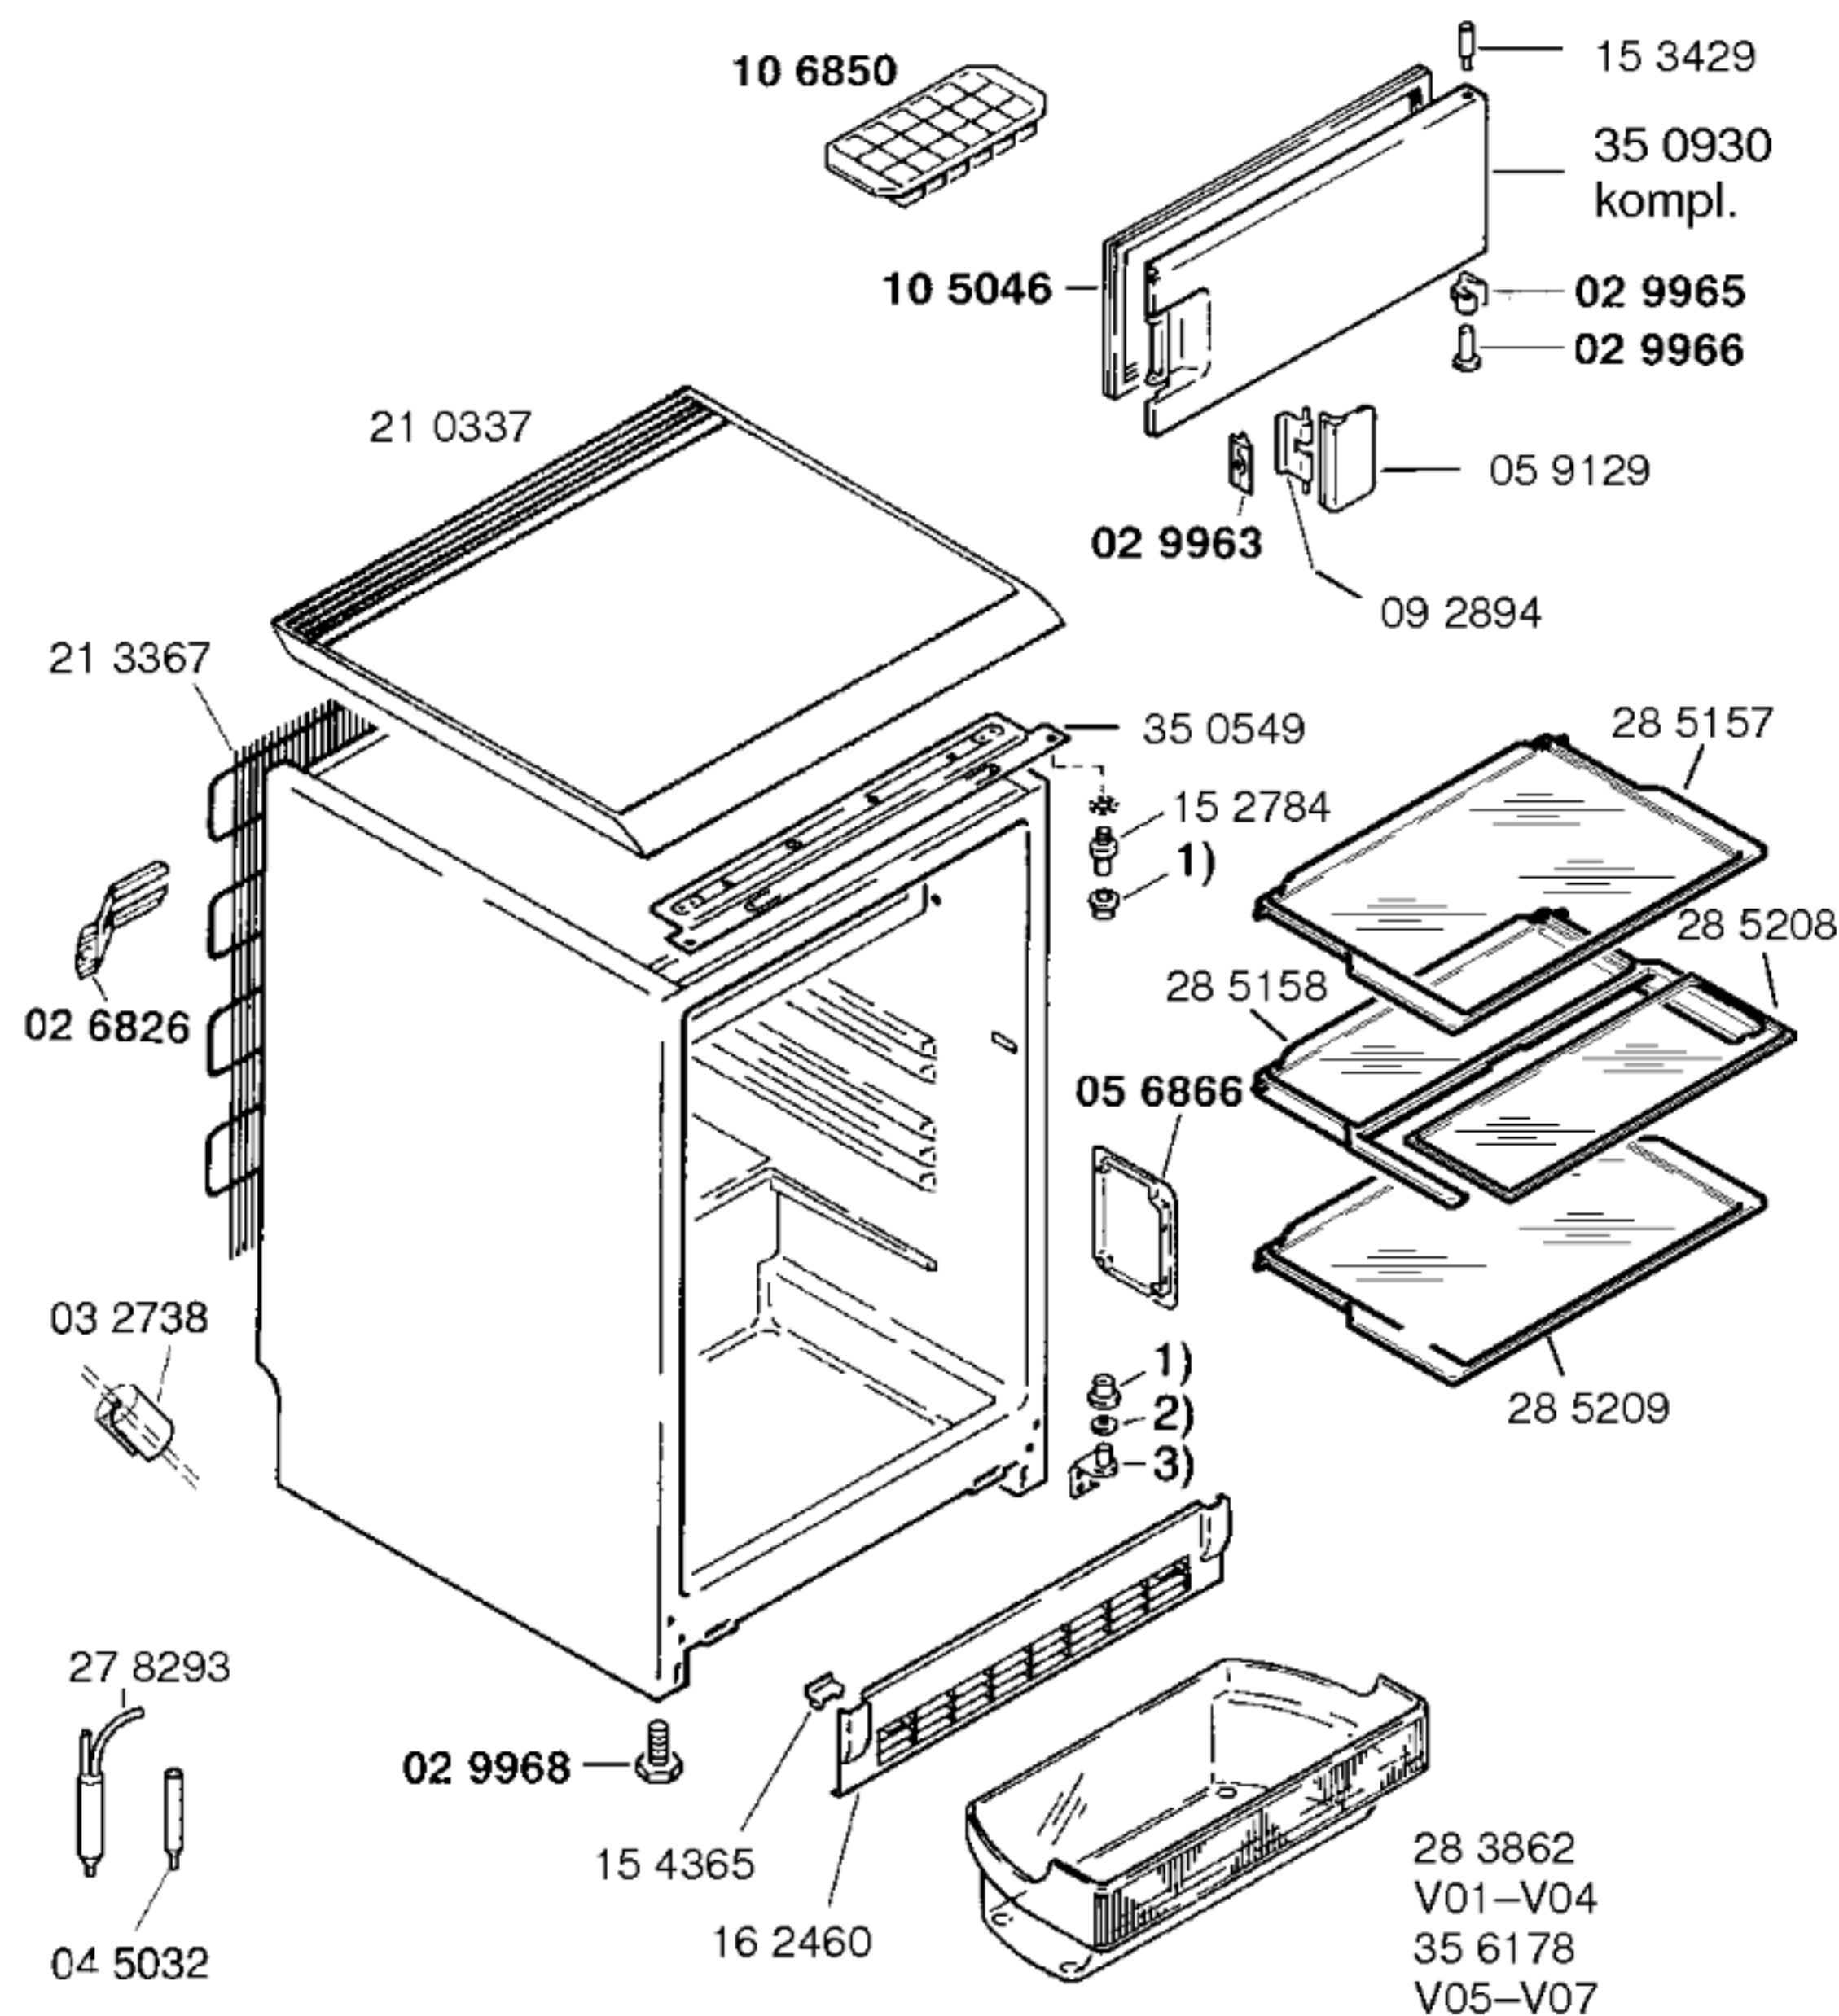

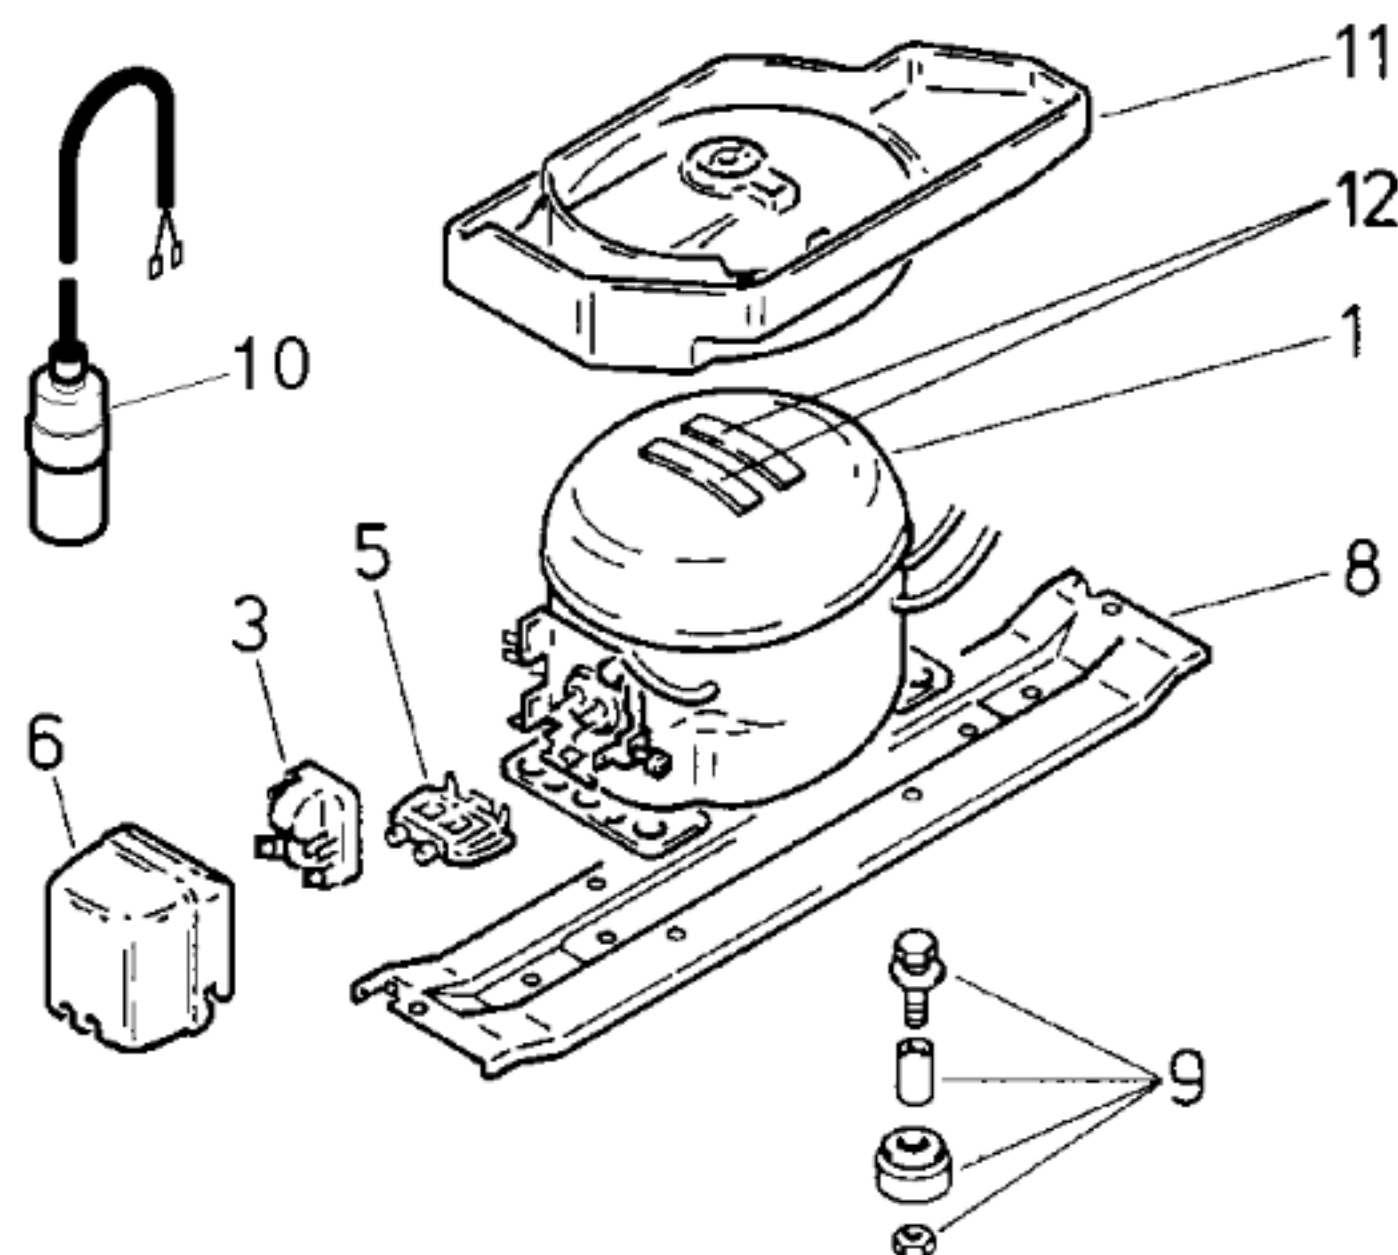

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur	Matsushita	Danfoss	Aspera	
Typ/Type	SD 65 E	TLY7K	EMT32CLP	
Förderleistung/Delivery/Débit	1170	1168	1073	
Anlaufstrom/Starting current/Cour de démarrage	A		3,5	
Widerstand/Resistance/Résistance	Ω		28,4	
Hi/aux	Ω		24,7	
Temp.-Regler/Thermostat				
Typ/Type				
Reglerstellung/Position				
Schaltwerte/Switching values/	„ein“			
Valeurs de commutation	„aus“			
(„abtauen“ od.)	„alarm“			
Füllmenge/Fill.quantity/Charge	R600a	g	*	*
Anschlußwert/Conn.load/Puiss. connectée	W	79	78	75
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	Ω			
Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω			
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance	Ω			
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			

* siehe Typenschild

Pos.	V02	V01, V03, V05	V04	
	Matsushita	Danfoss	Aspera	
	SD 65 E	TLY7K	EMT32CLP	
1	14 1316	14 1816	14 1838	
2				
3	15 3306	15 1055	17 0880	
4				
5	15 3865	15 0760	17 0882	
6	15 3303	15 1072	17 0881	
7				
8	27 1375	27 1375	27 1375	
9	05 0166	05 0166	05 0166	
10				
11	26 1981	08 4744	08 4744	
12	05 6008	05 6008	05 6008	