


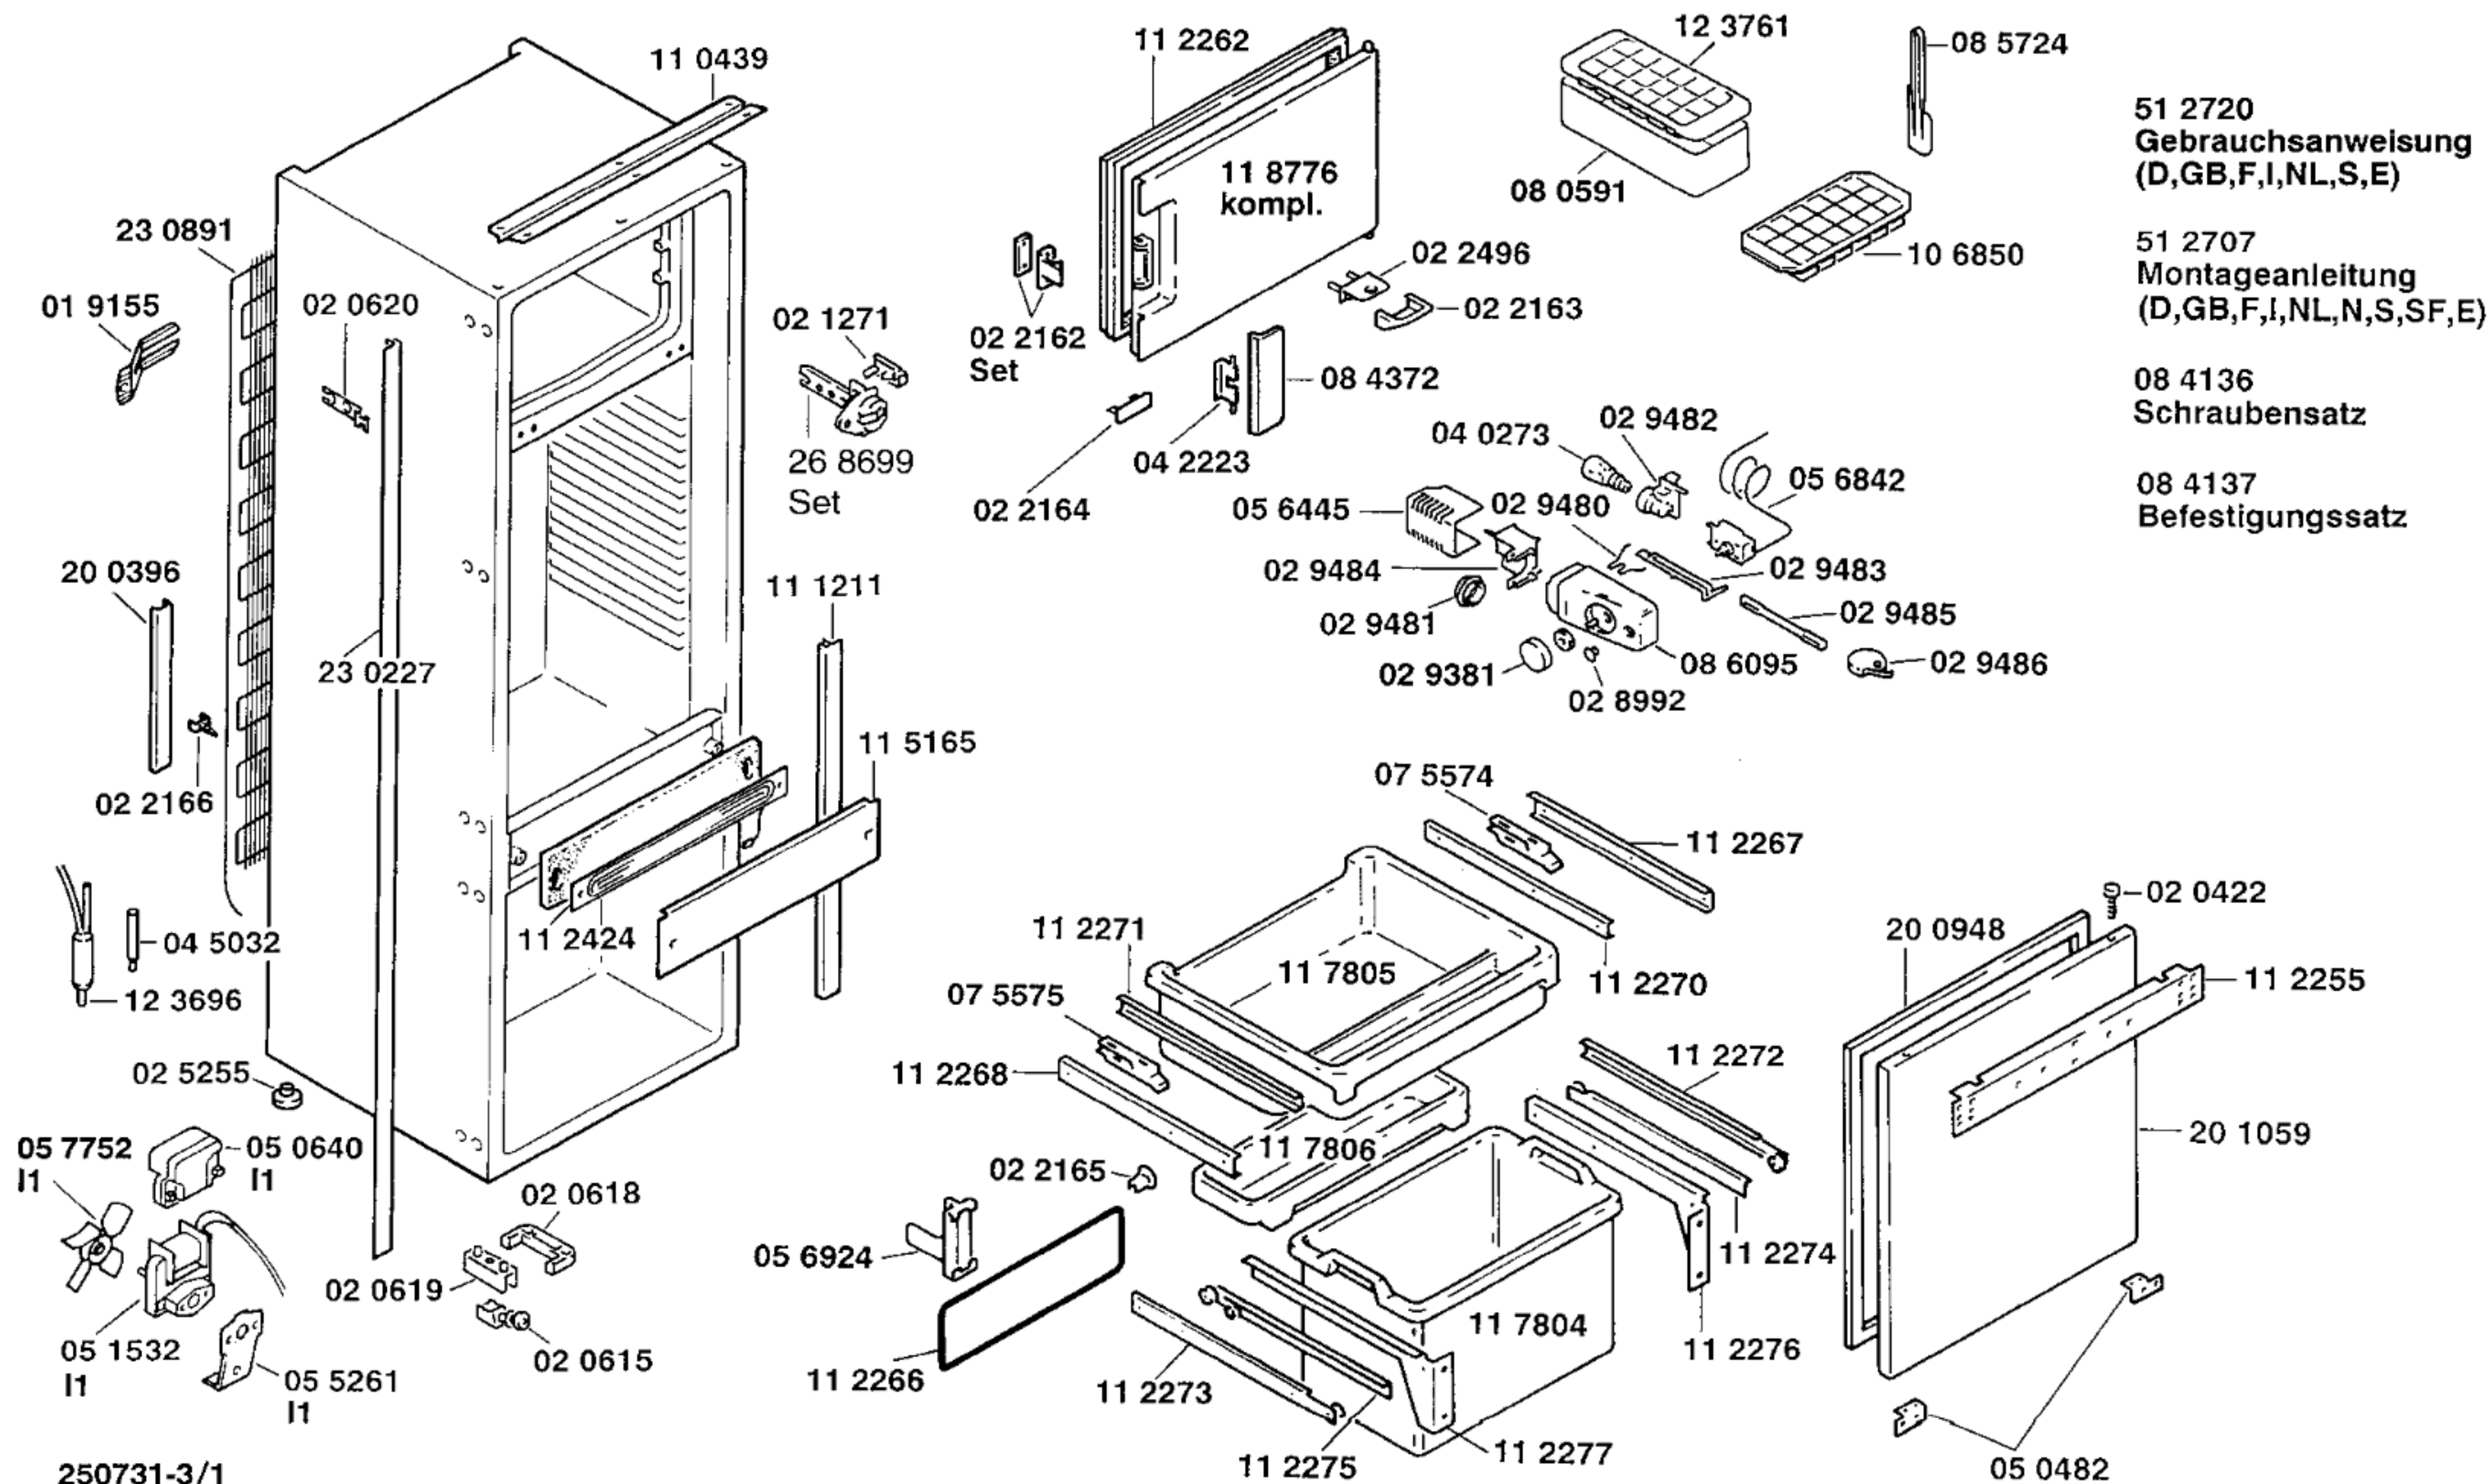
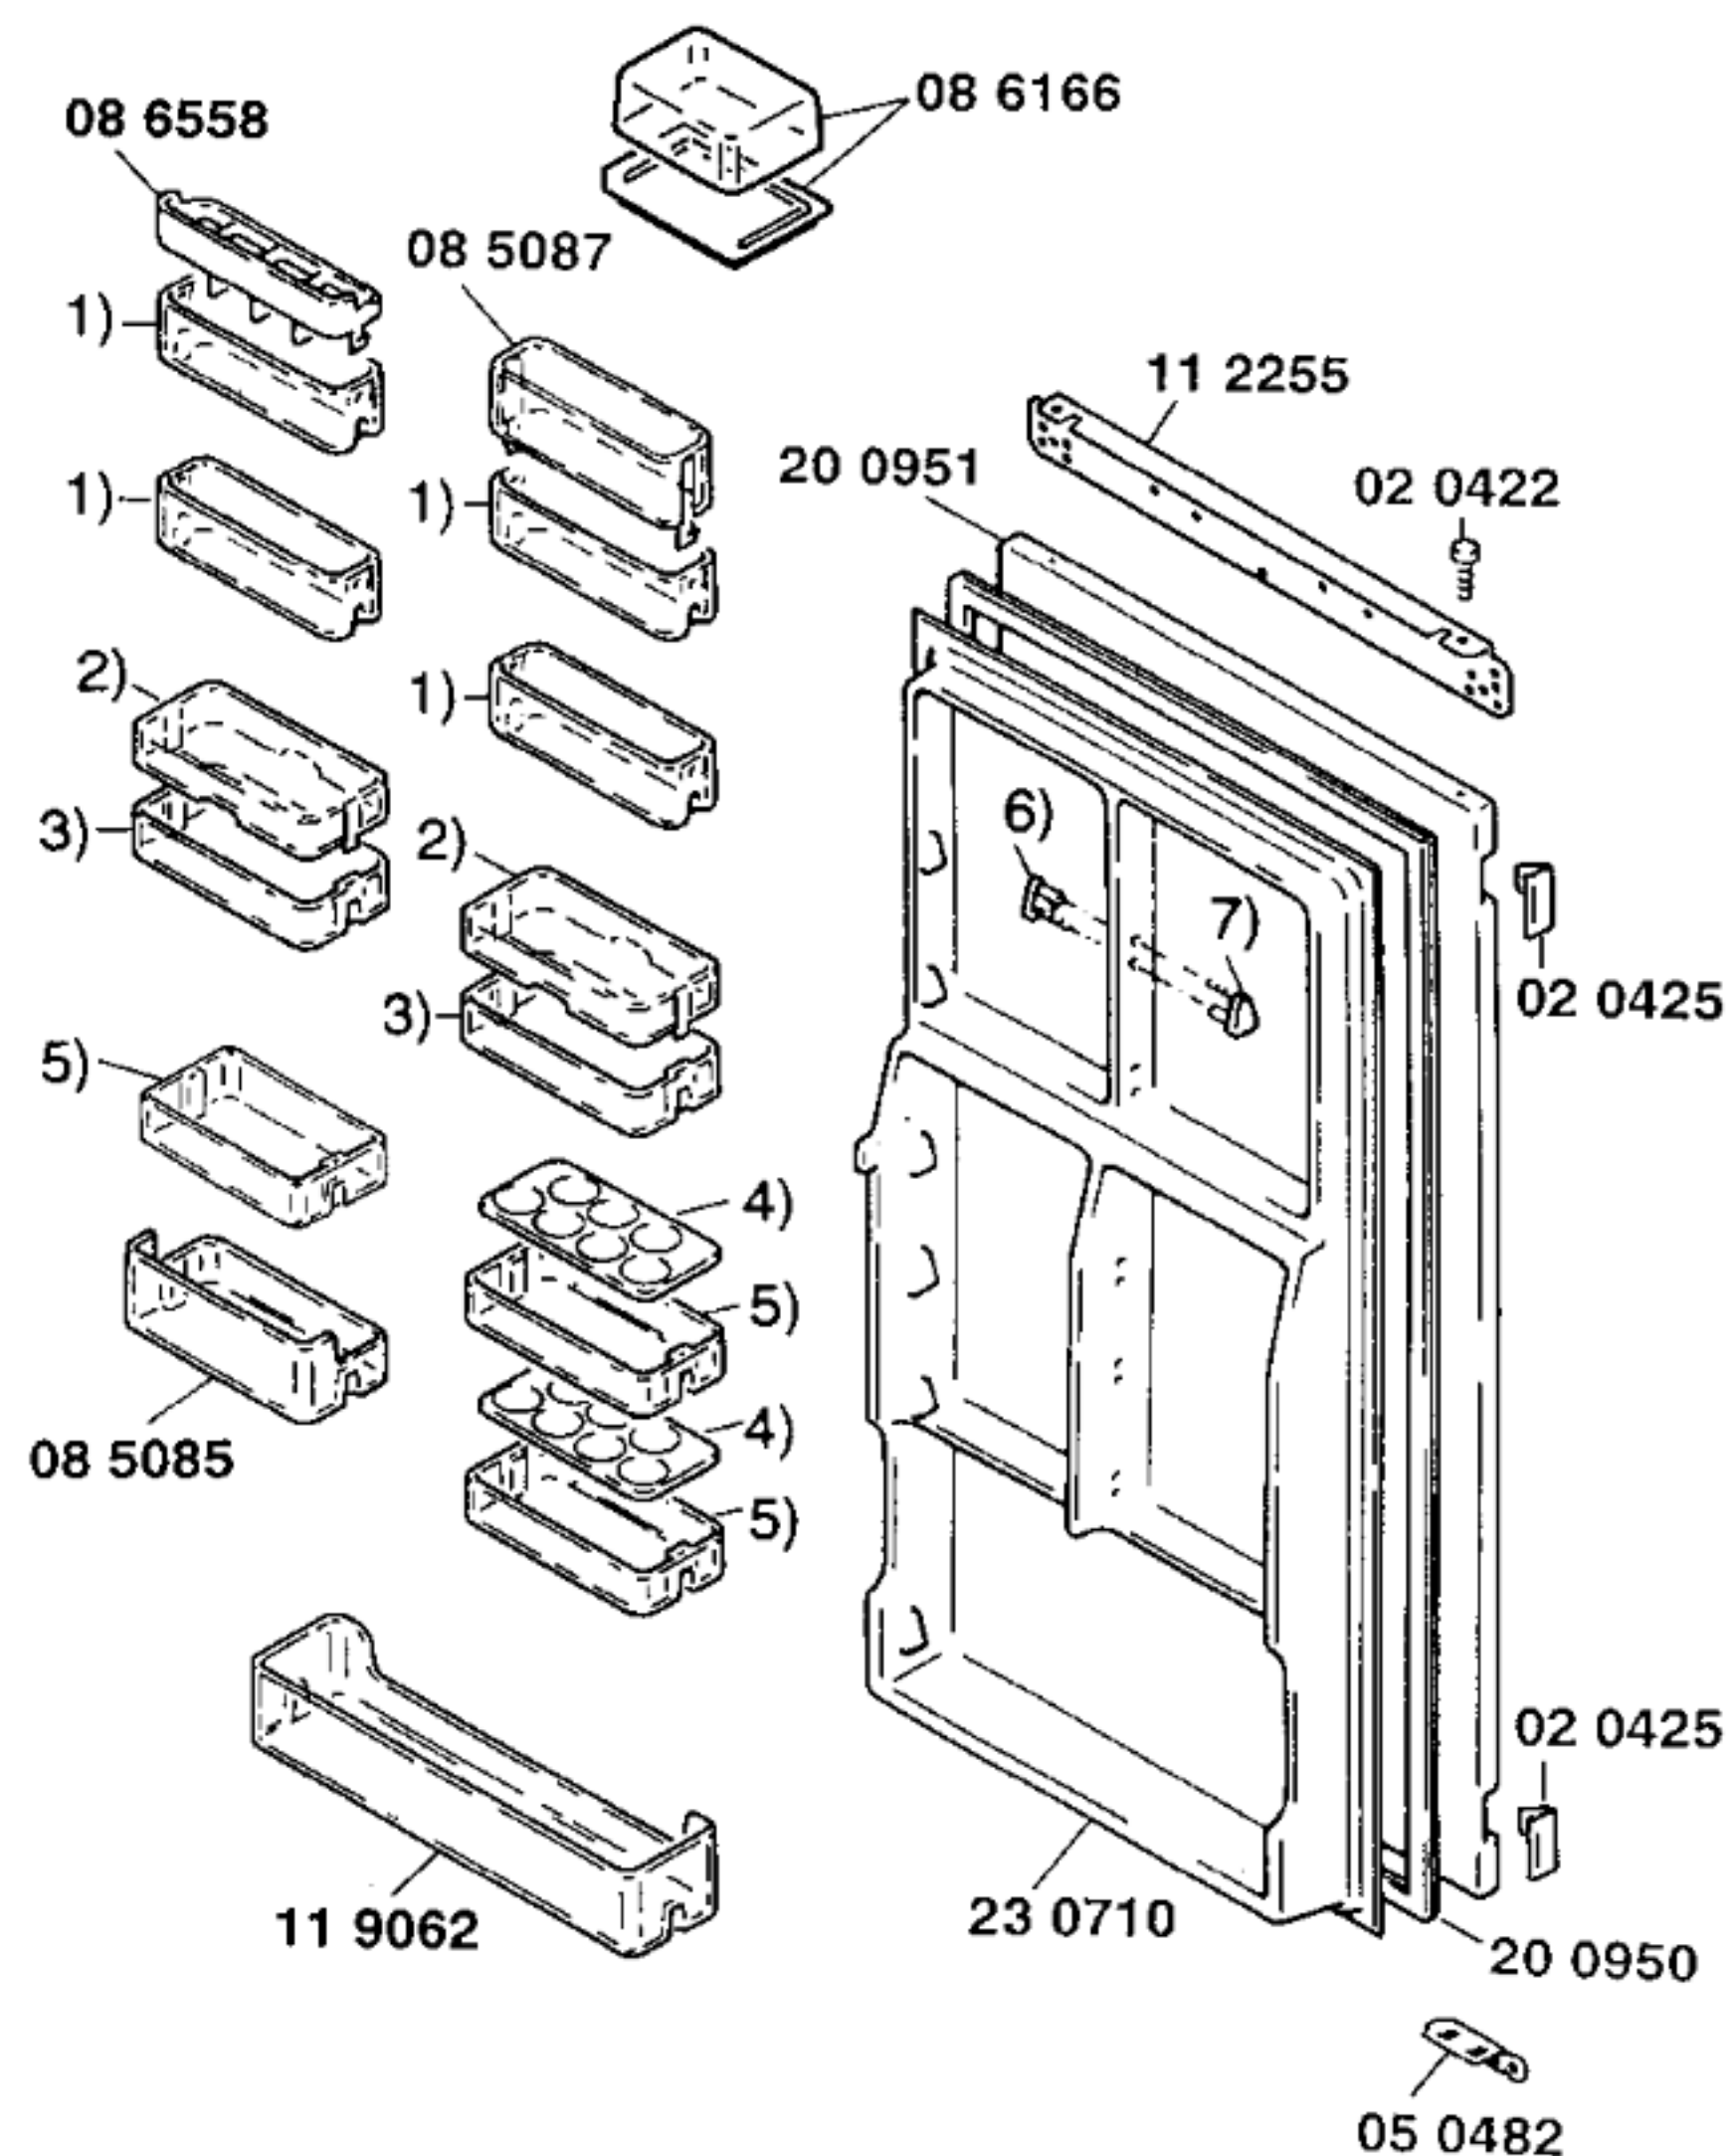


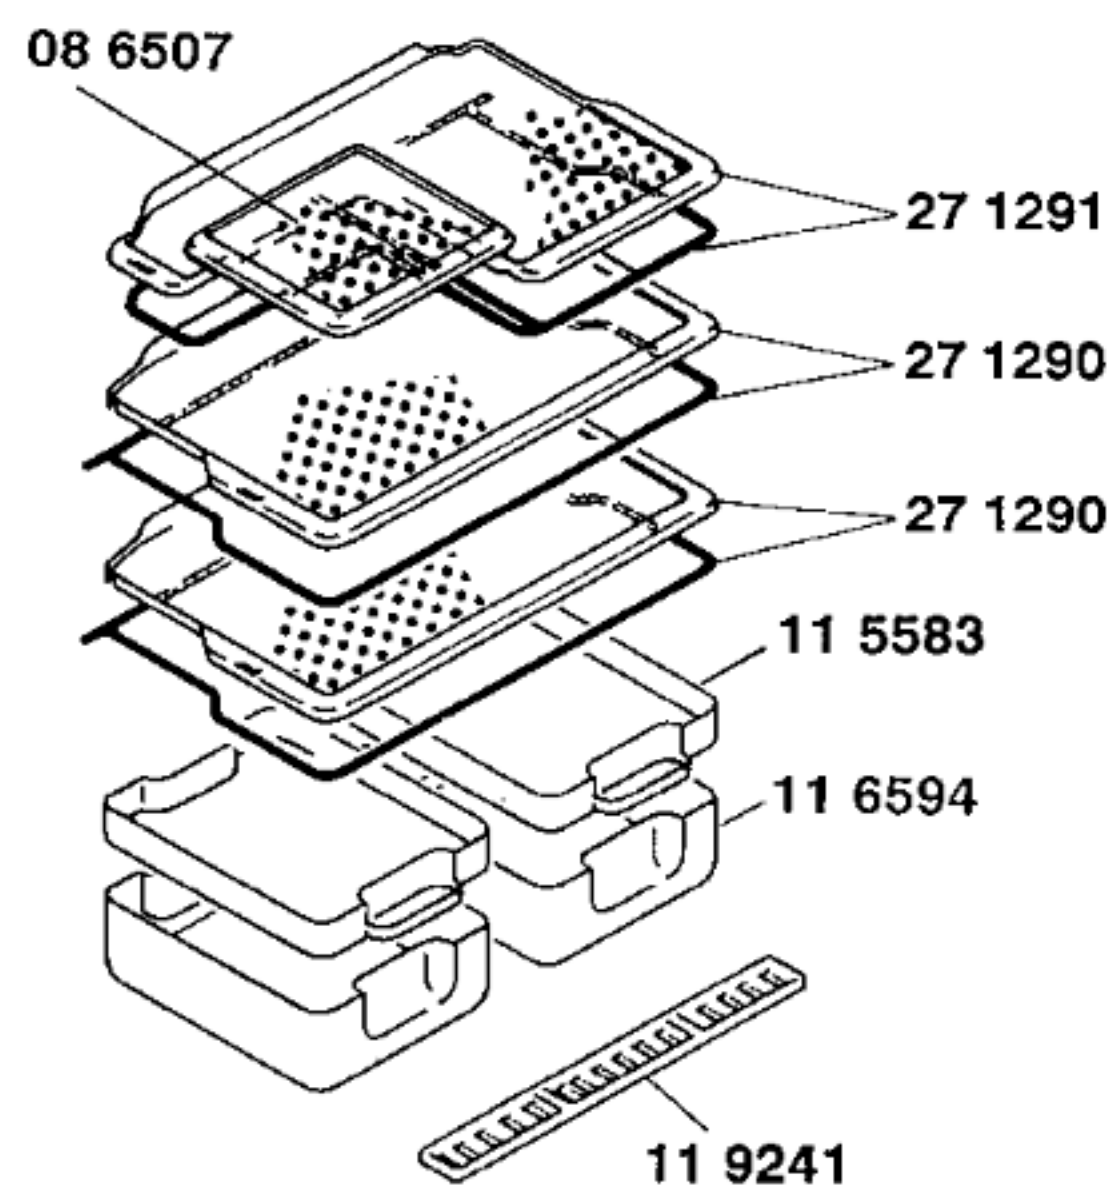

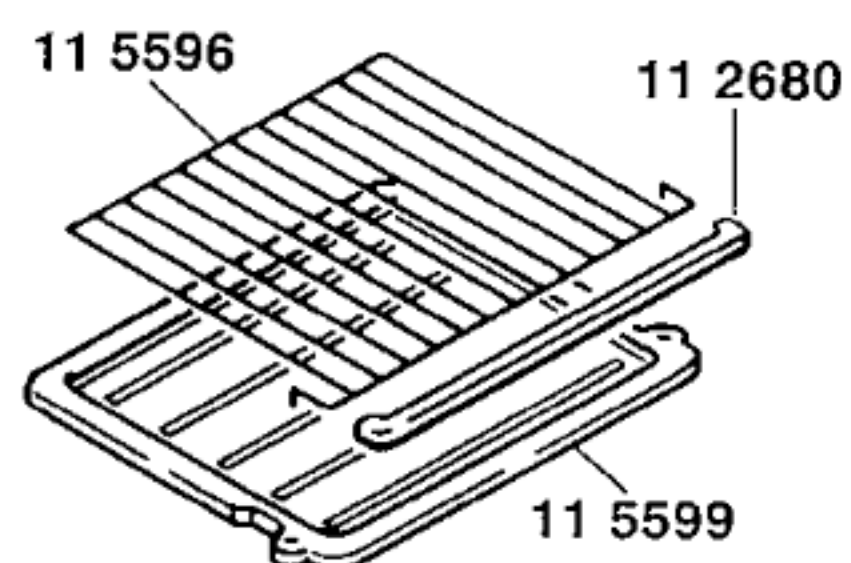

- 1) 08 5089
- 2) 08 5086
- 3) 08 5084
- 4) 08 4592
- 5) 08 5084
- 6) 02 2437
- 7) 02 6566

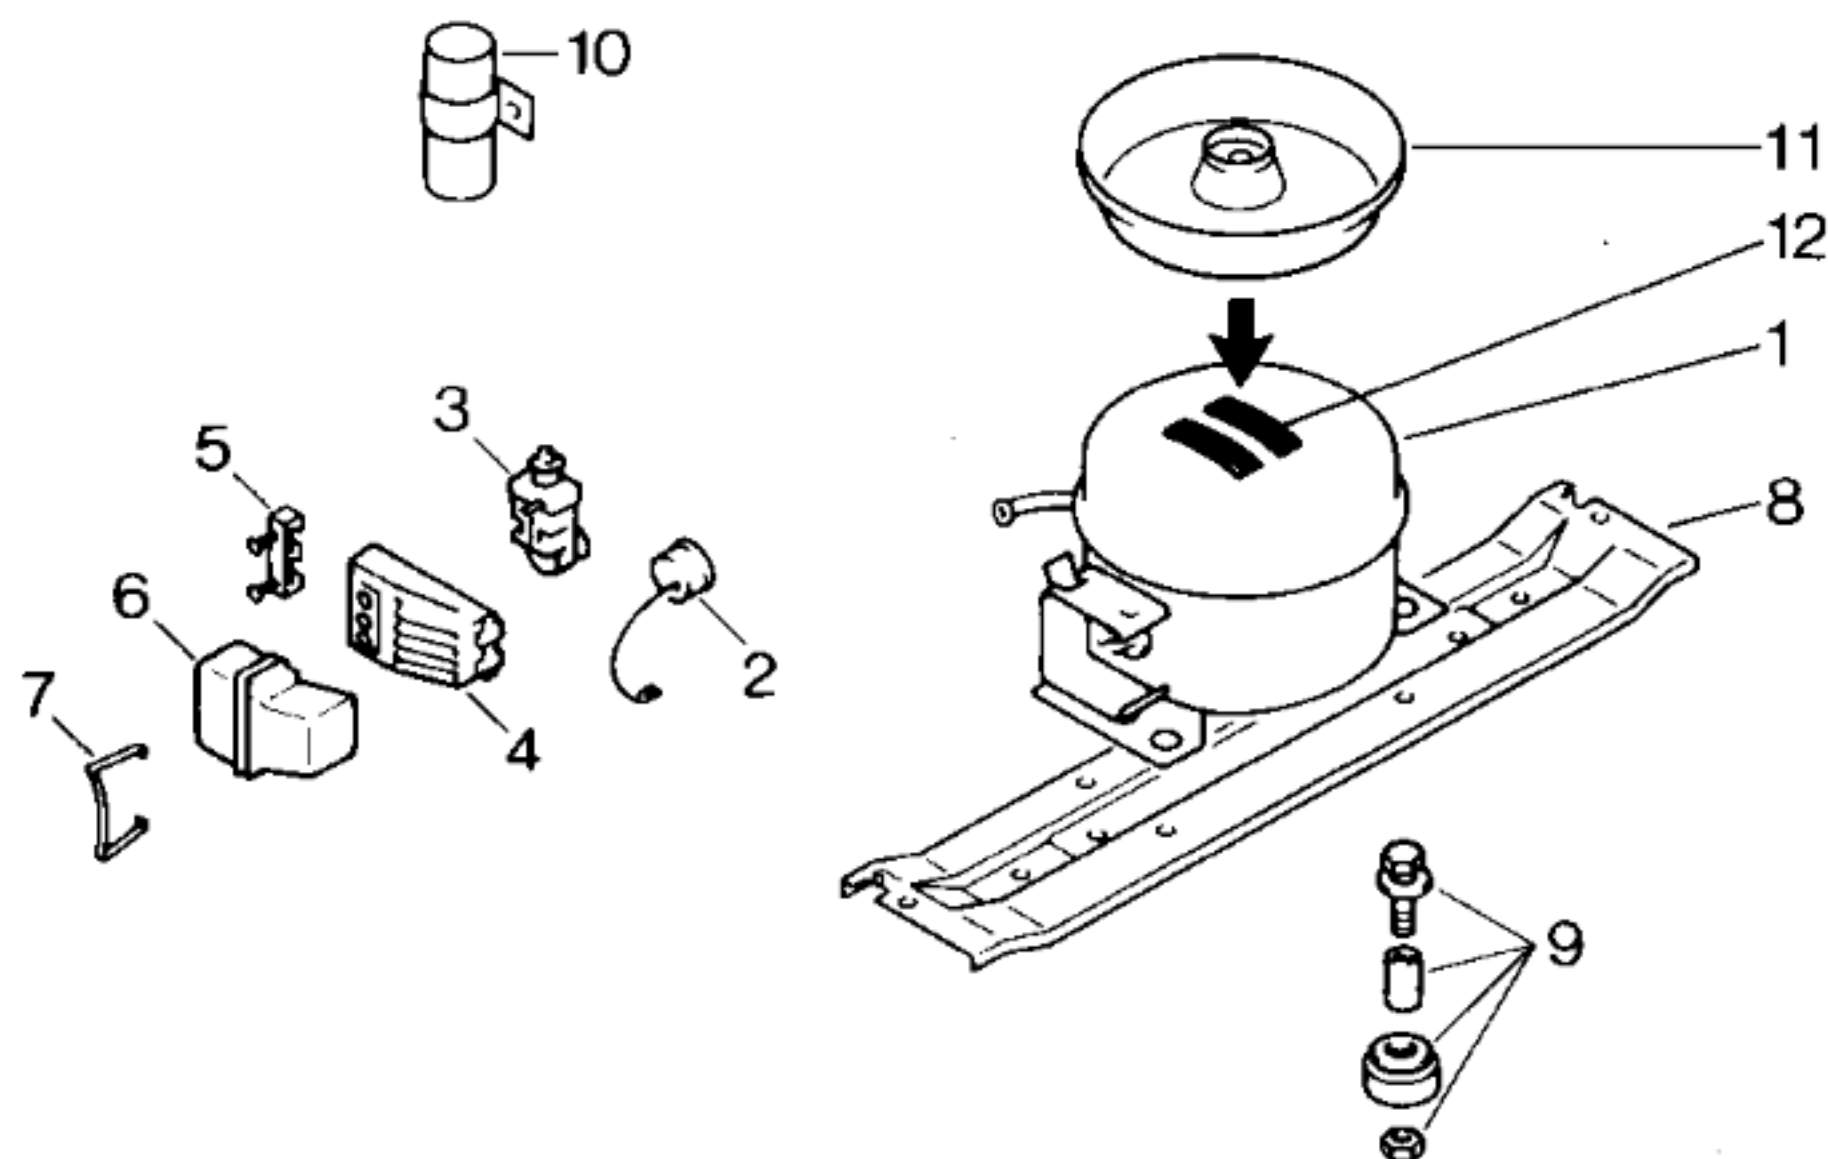

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur	Aspera	Matsushita	
Typ/Type	BY 1116 A	D116LRAA	
Förderleistung/Delivery/Débit	l/h	1450	1184
Anlaufstrom/Starting current/Cour. de démarrage	A	9,9	8,75
Widerstand/Resistance/Résistance	Ha/main/prin.	Ω	11,7
	Hi/aux	Ω	37,7
Temp.-Regler/Thermostat	Ranco		
Typ/Type	K 59		
Reglerstellung/Position	kalt	warm	
Schaltwerte/Switching values/	+4,5	+4,5	
Valeurs de commutation	„ein“	„aus“	
(„abtauen“ od.)	„alarm“	-31,0	-13,5
Füllmenge/Fill.quantity/Charge	R12	g	180
Anschlußwert/Conn.load/Puiss. connectée	W	150	
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω	8800	
Leistung/Power/Puissance	W	5,5	
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω	430 ± 10%	
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		

Pos.	EU1,CH1,F1,I1	EU2,CH2,F2	
	Aspera	Matsushita	
	BY 1116 A	D116LRAA	
1	14 0405	14 0563	
2	02 6559	05 8506	
3	02 2342		
4	05 1748		
5			
6	05 1746	05 8458	
7	02 2339	02 6731	
8	11 1838	11 1838	
9	05 0166	05 0166	
10			
11	08 5091	08 5182	
12	05 6008	05 6008	