

**BOSCH**


GSA 300-0 705 304 506-D1
 - 0 705 304 511-D2
 - 0 705 304 518-D3

GSA 300-0 705 304 521-F1
 - 0 705 304 526-D4
 - 0 705 304 527-F2

GSA 300-0 705 304 531-D5

GEFRIERGERÄTE
 Gefrierschränke, Stand

Ident - Nummern - Konstante
 3740

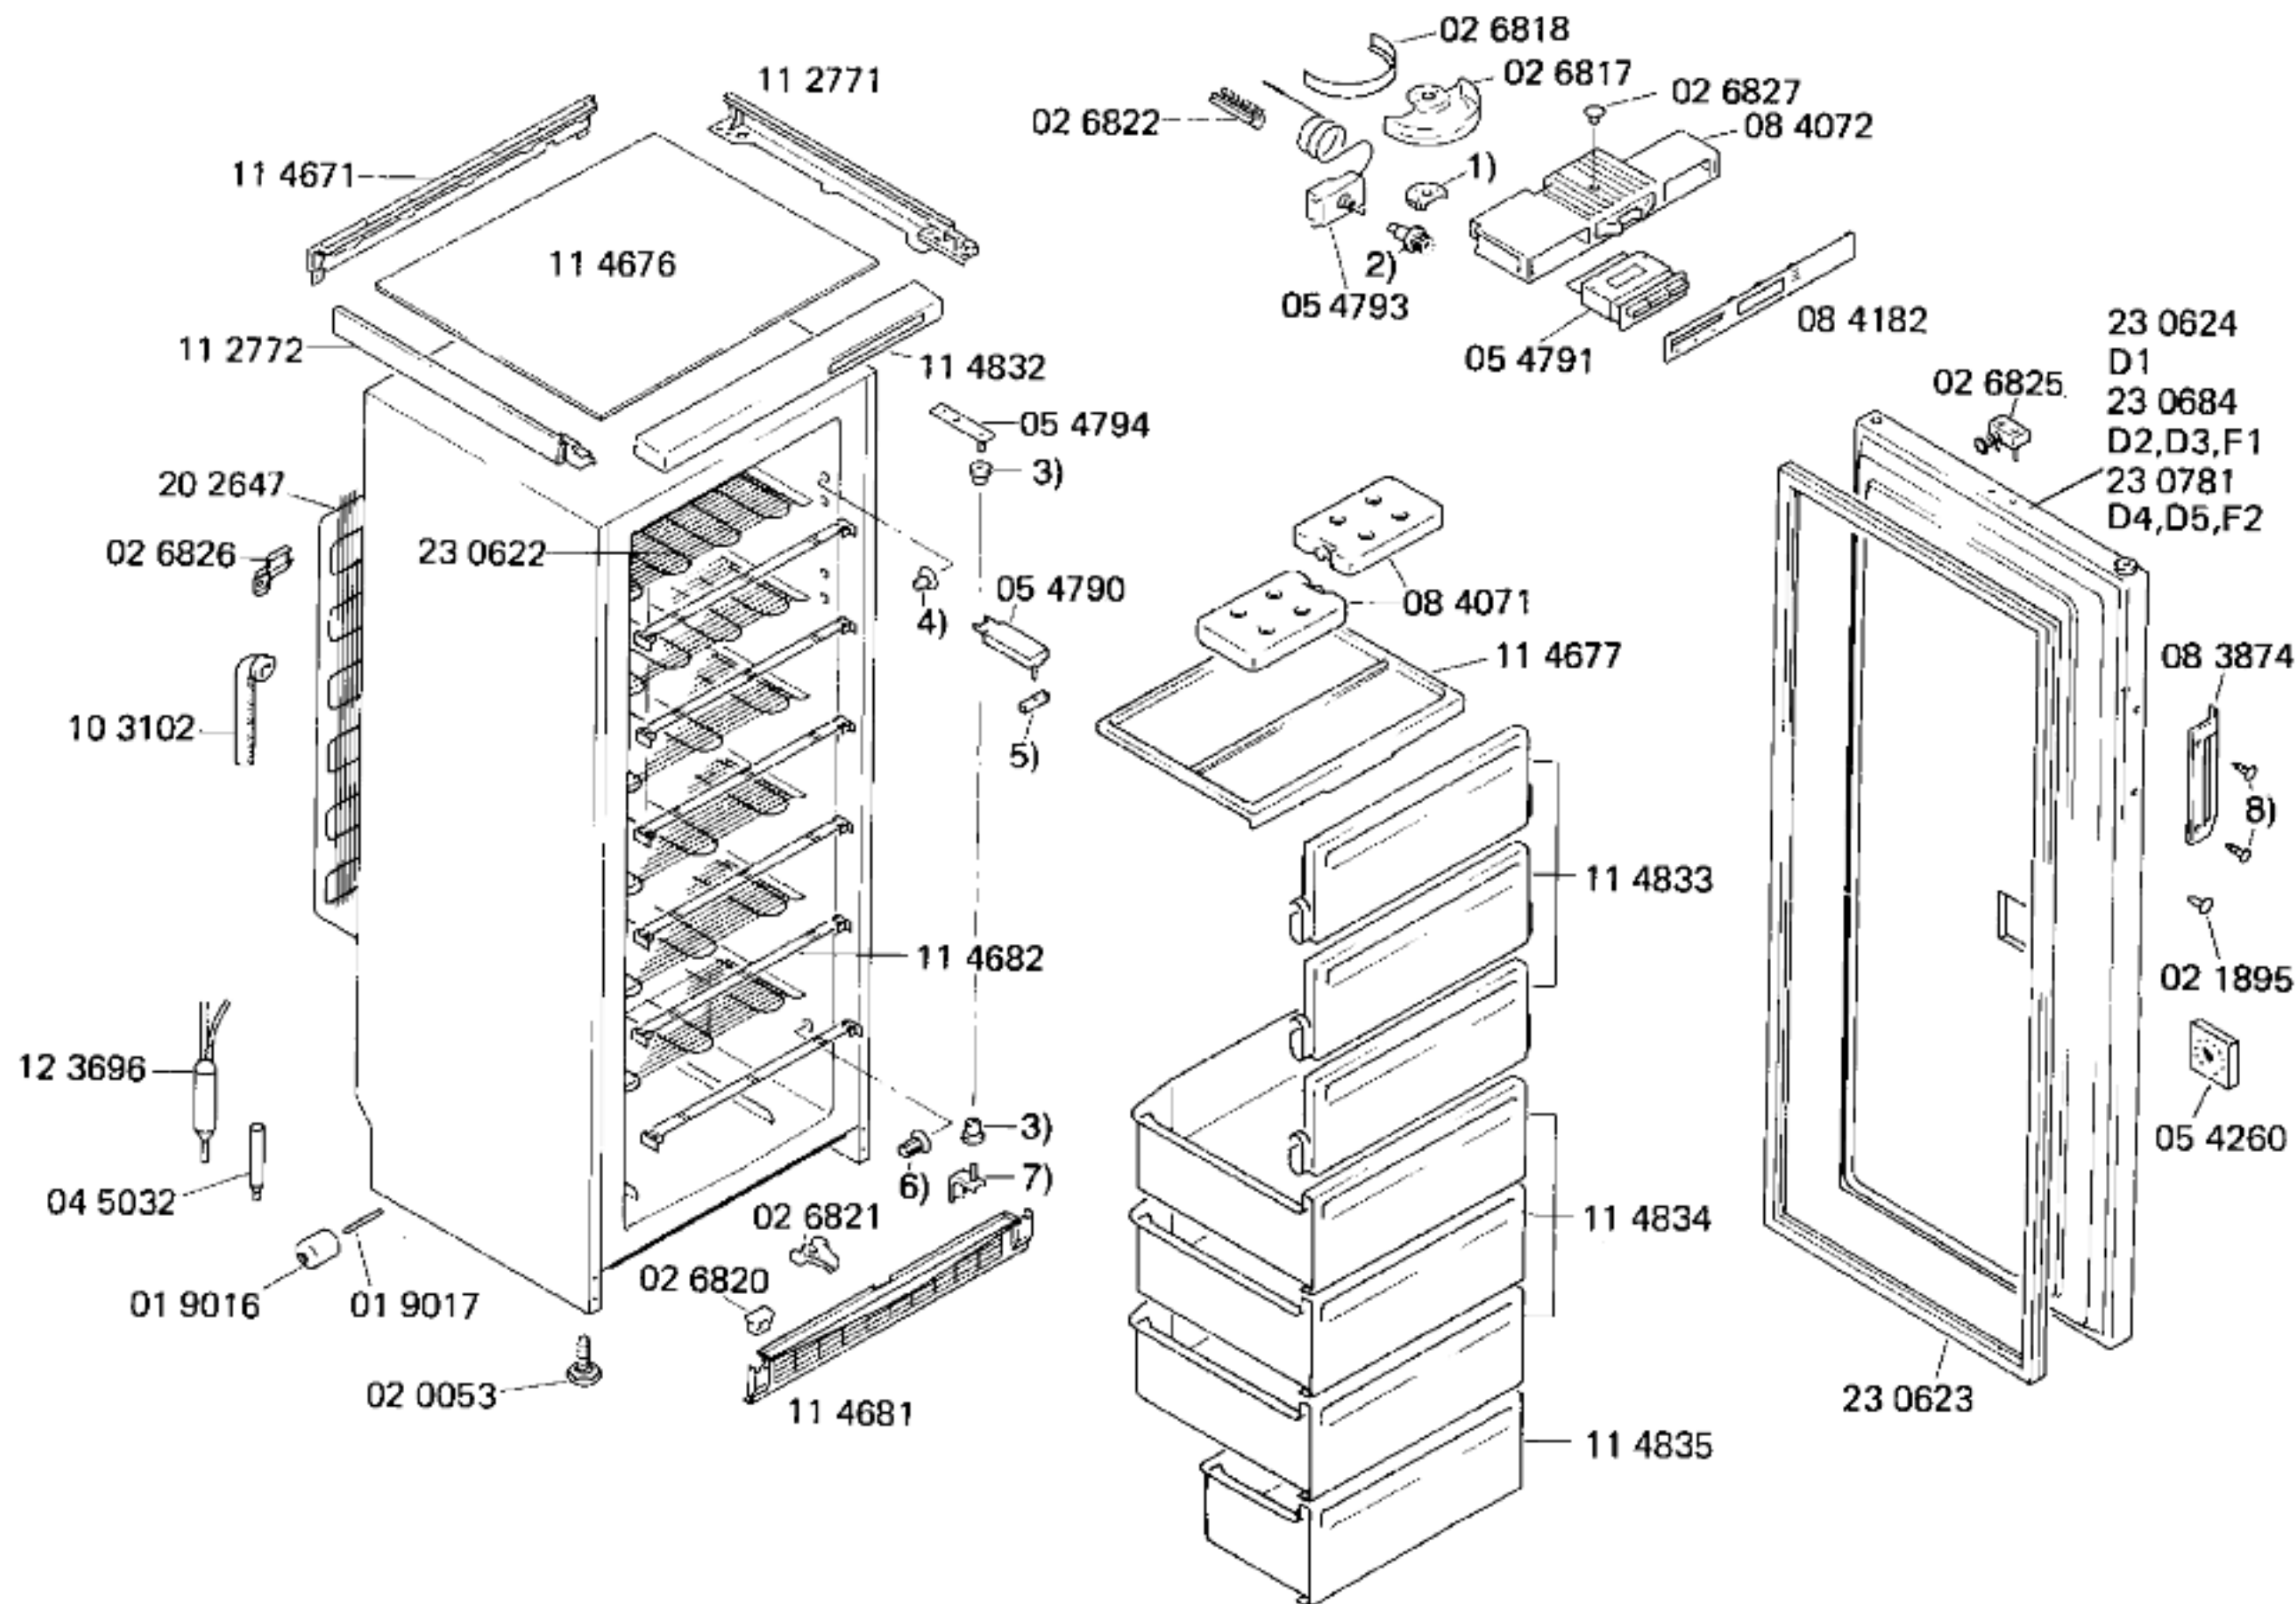

51 1941
 D1,D2,D3,D4,D5,F1,F2
 Gebrauchsanweisung
 (D,GB,F,I,NL,P,SF,DK,
 E,S)

- | | |
|----------|------------|
| 23 0624 | 1) 02 6816 |
| D1 | 2) 02 6819 |
| 23 0684 | 3) 01 2418 |
| D2,D3,F1 | 4) 02 6824 |
| 23 0781 | 5) 02 6815 |
| D4,D5,F2 | |
| | 6) 01 8901 |
| | 7) 05 4795 |
| | 8) 01 9081 |

**BOSCH**


GSA 300 – 0 705 304 506–D1
 – 0 705 304 511–D2
 – 0 705 304 518–D3

GSA 300 – 0 705 304 521–F1
 – 0 705 304 526–D4
 – 0 705 304 527–F2

GSA 300 – 0 705 304 531–D5

GEFRIERGERÄTE
 Gefrierschränke, Stand

Ident – Nummern – Konstante
 3740

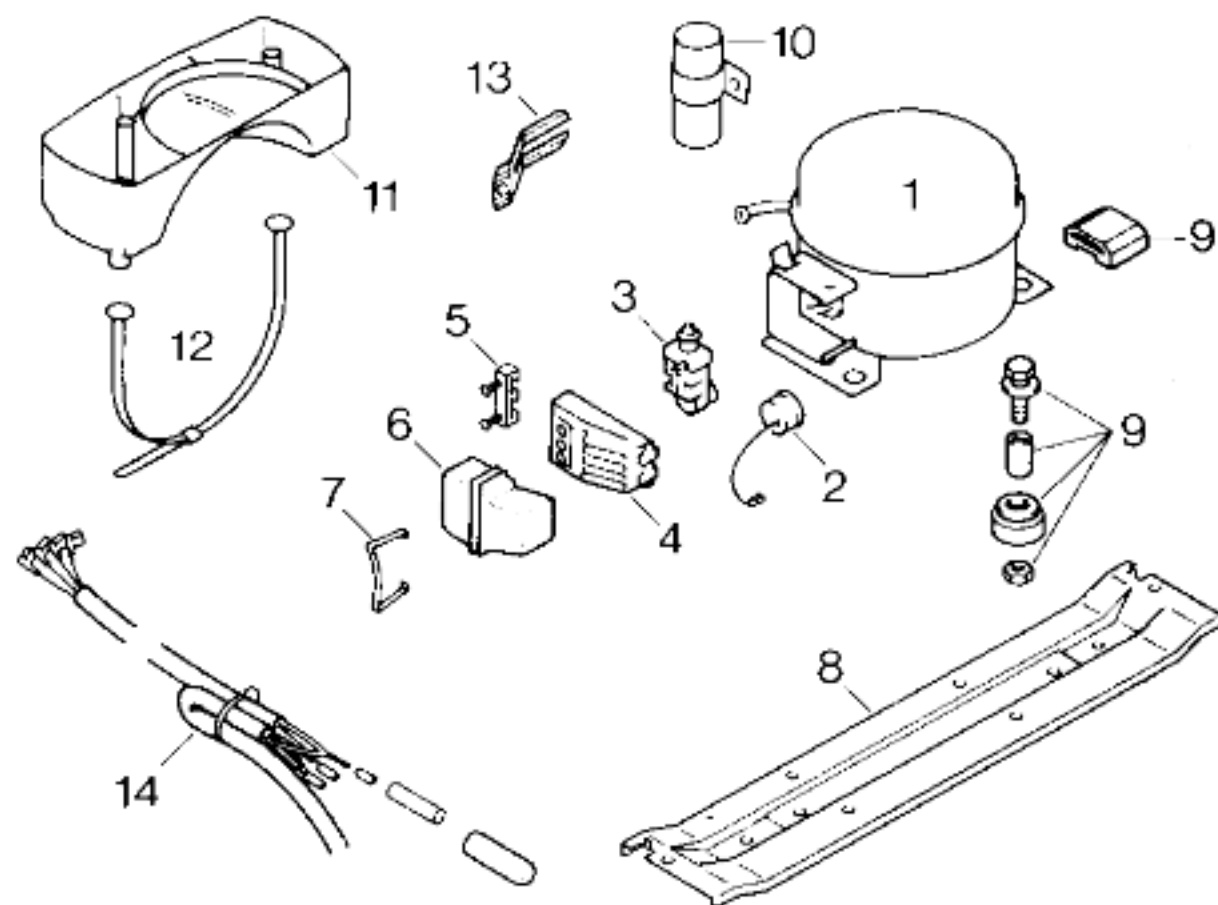

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Aspera	Danfoss		
Typ/Type		BY 1116 A	FR 8,5 A		
Förderleistung/Delivery/Débit		l/h	1450	1430	
Anlaufstrom/Starting current/Cour. de démarrage		A	9,9	10,3	
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	11,7	12,2	
		Hi/aux Ω	37,7	13,7	
Temp. Regler/Thermostat		Danfoss			
Typ/Type		077 B 2054			
Reglerstellung/Position		kalt	warm		
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$	- 24	- 18	
Valeurs de commutation		„aus“	- 34	- 24	
(„abtauen“ od.)		„alarm“	- 19	- 12	
Füllmenge/Fill.quantity/Charge		R12	g	195	
Anschlußwert/Conn.load/Puiss. connectée		W	170		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω			
Leistung/Power/Puissance		W			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			

Pos.	D1,D2,D3,D4, F1,F2	D5		
	Aspera	Danfoss		
1	14 0312	14 0157		
2	02 6559			
3	02 2342	02 0108		
4	05 1748			
5		02 1361		
6	05 1746	05 1413		
7	02 2339			
8				
9	05 0166			
10				
11				
12				
13				
14				