


**BOSCH**


KÜHLSCHRANK KS 160 TL	- 0 701 164 764-D1	KS 160 TL	- 0 701 164 781-CH2
	- 0 701 164 765-D2		- 0 701 164 782-SK1
	- 0 701 164 776-D3		- 0 701 164 783-SK2
	- 0 701 164 780-CH1		

 Ident-Nummern-Konstante
 3740

ab FD 428 ohne Feinsicherungen

x Türe links angeschlagen

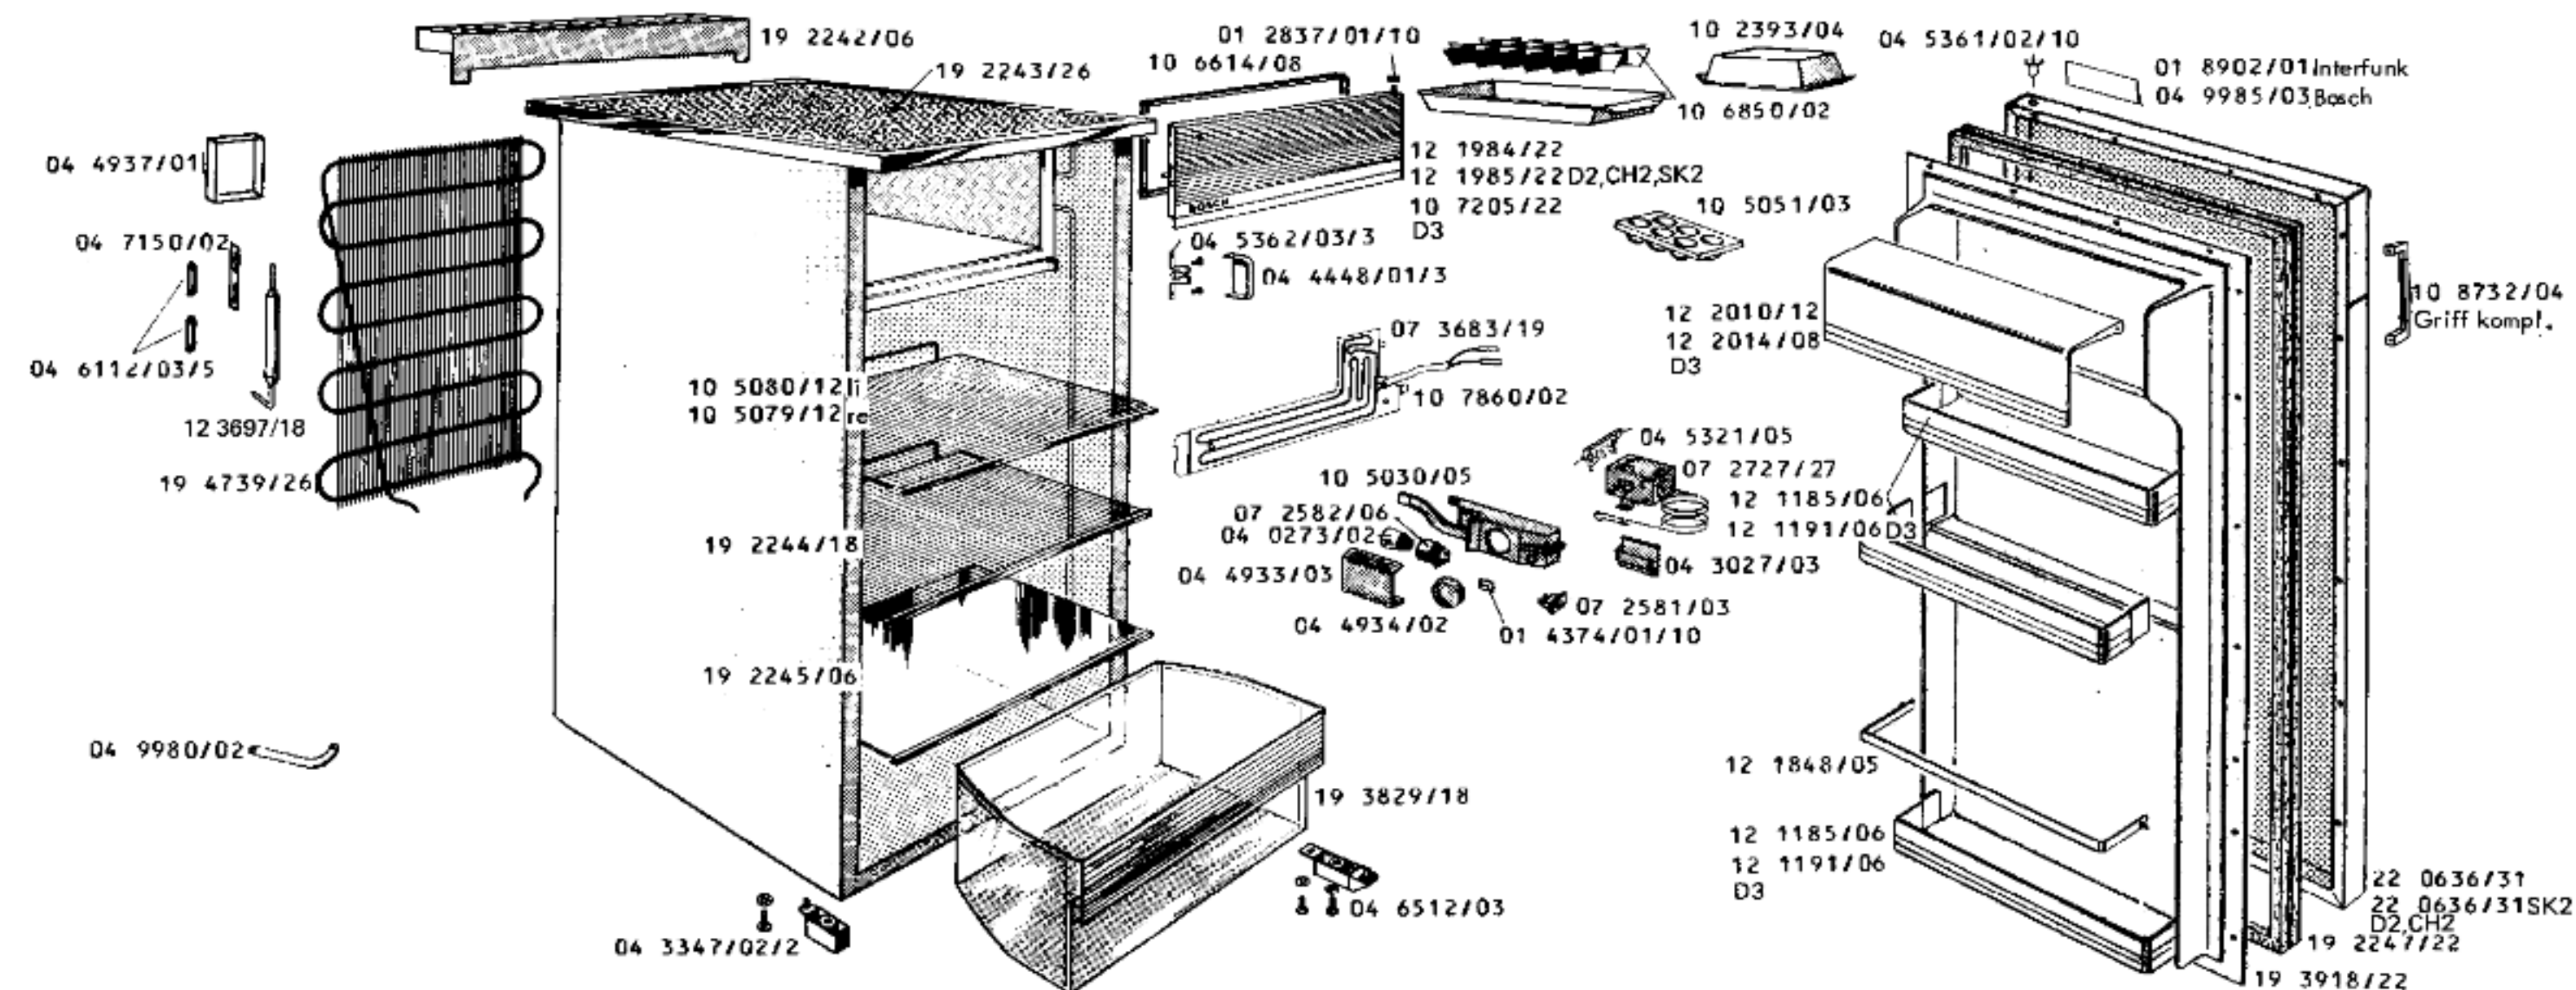

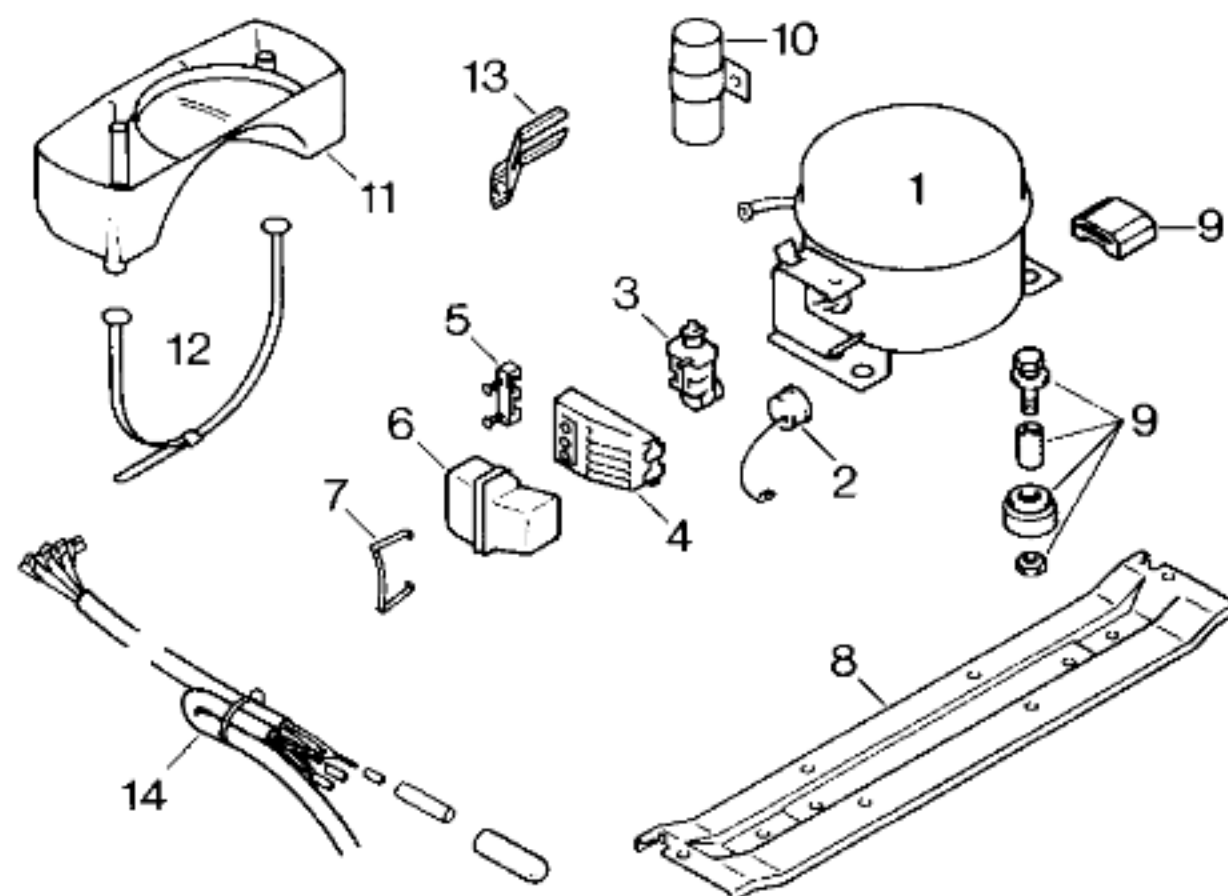

Pos.	D1,D2,D3 CH1,CH2,F1,F2	D1,D2,D3 CH1,CH2,F1,F2
	Bosch	Danfoss
1		13 1064/45
2	07 2115/18	
3	07 1804/18	02 0108/27
4	04 9757/02	
5		02 1361/04
6	04 9758/02	05 1413/06
7		
8		*11 1838/03
9		*05 0166/05/4
10		
11		
12		
13		*04 1568/01/2
14		*05 1226/08

*) Bei Ersatz des Bosch-Verdichters mitbestellen
To be ordered when replacing the Bosch compressor
A commander lors du remplacement du compresseur Bosch

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Bosch	Danfoss		
Typ/Type		V 792	TL 4 A		
Förderleistung/Delivery/Débit		l/h	702		
Anlaufstrom/Starting current/Cour. de démarrage		A	8,3	7,8	
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	23,0	23,8	
		Hi/aux Ω	25,2	17,0	
Temp.-Regler/Thermostat			Ranco		
Typ/Type			A 59		
Reglerstellung/Position			kalt warm		
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$	+ 4 + 4		
Valeurs de commutation		„aus“	- 29 - 19		
		(„abtauen“ od.) „alarm“			
Füllmenge/Fill.quantity/Charge		R12 g	115		
Anschlußwert/Conn.load/Puiss. connectée		W	120		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω	3280		
Leistung/Power/Puissance		W	14,8		
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			