



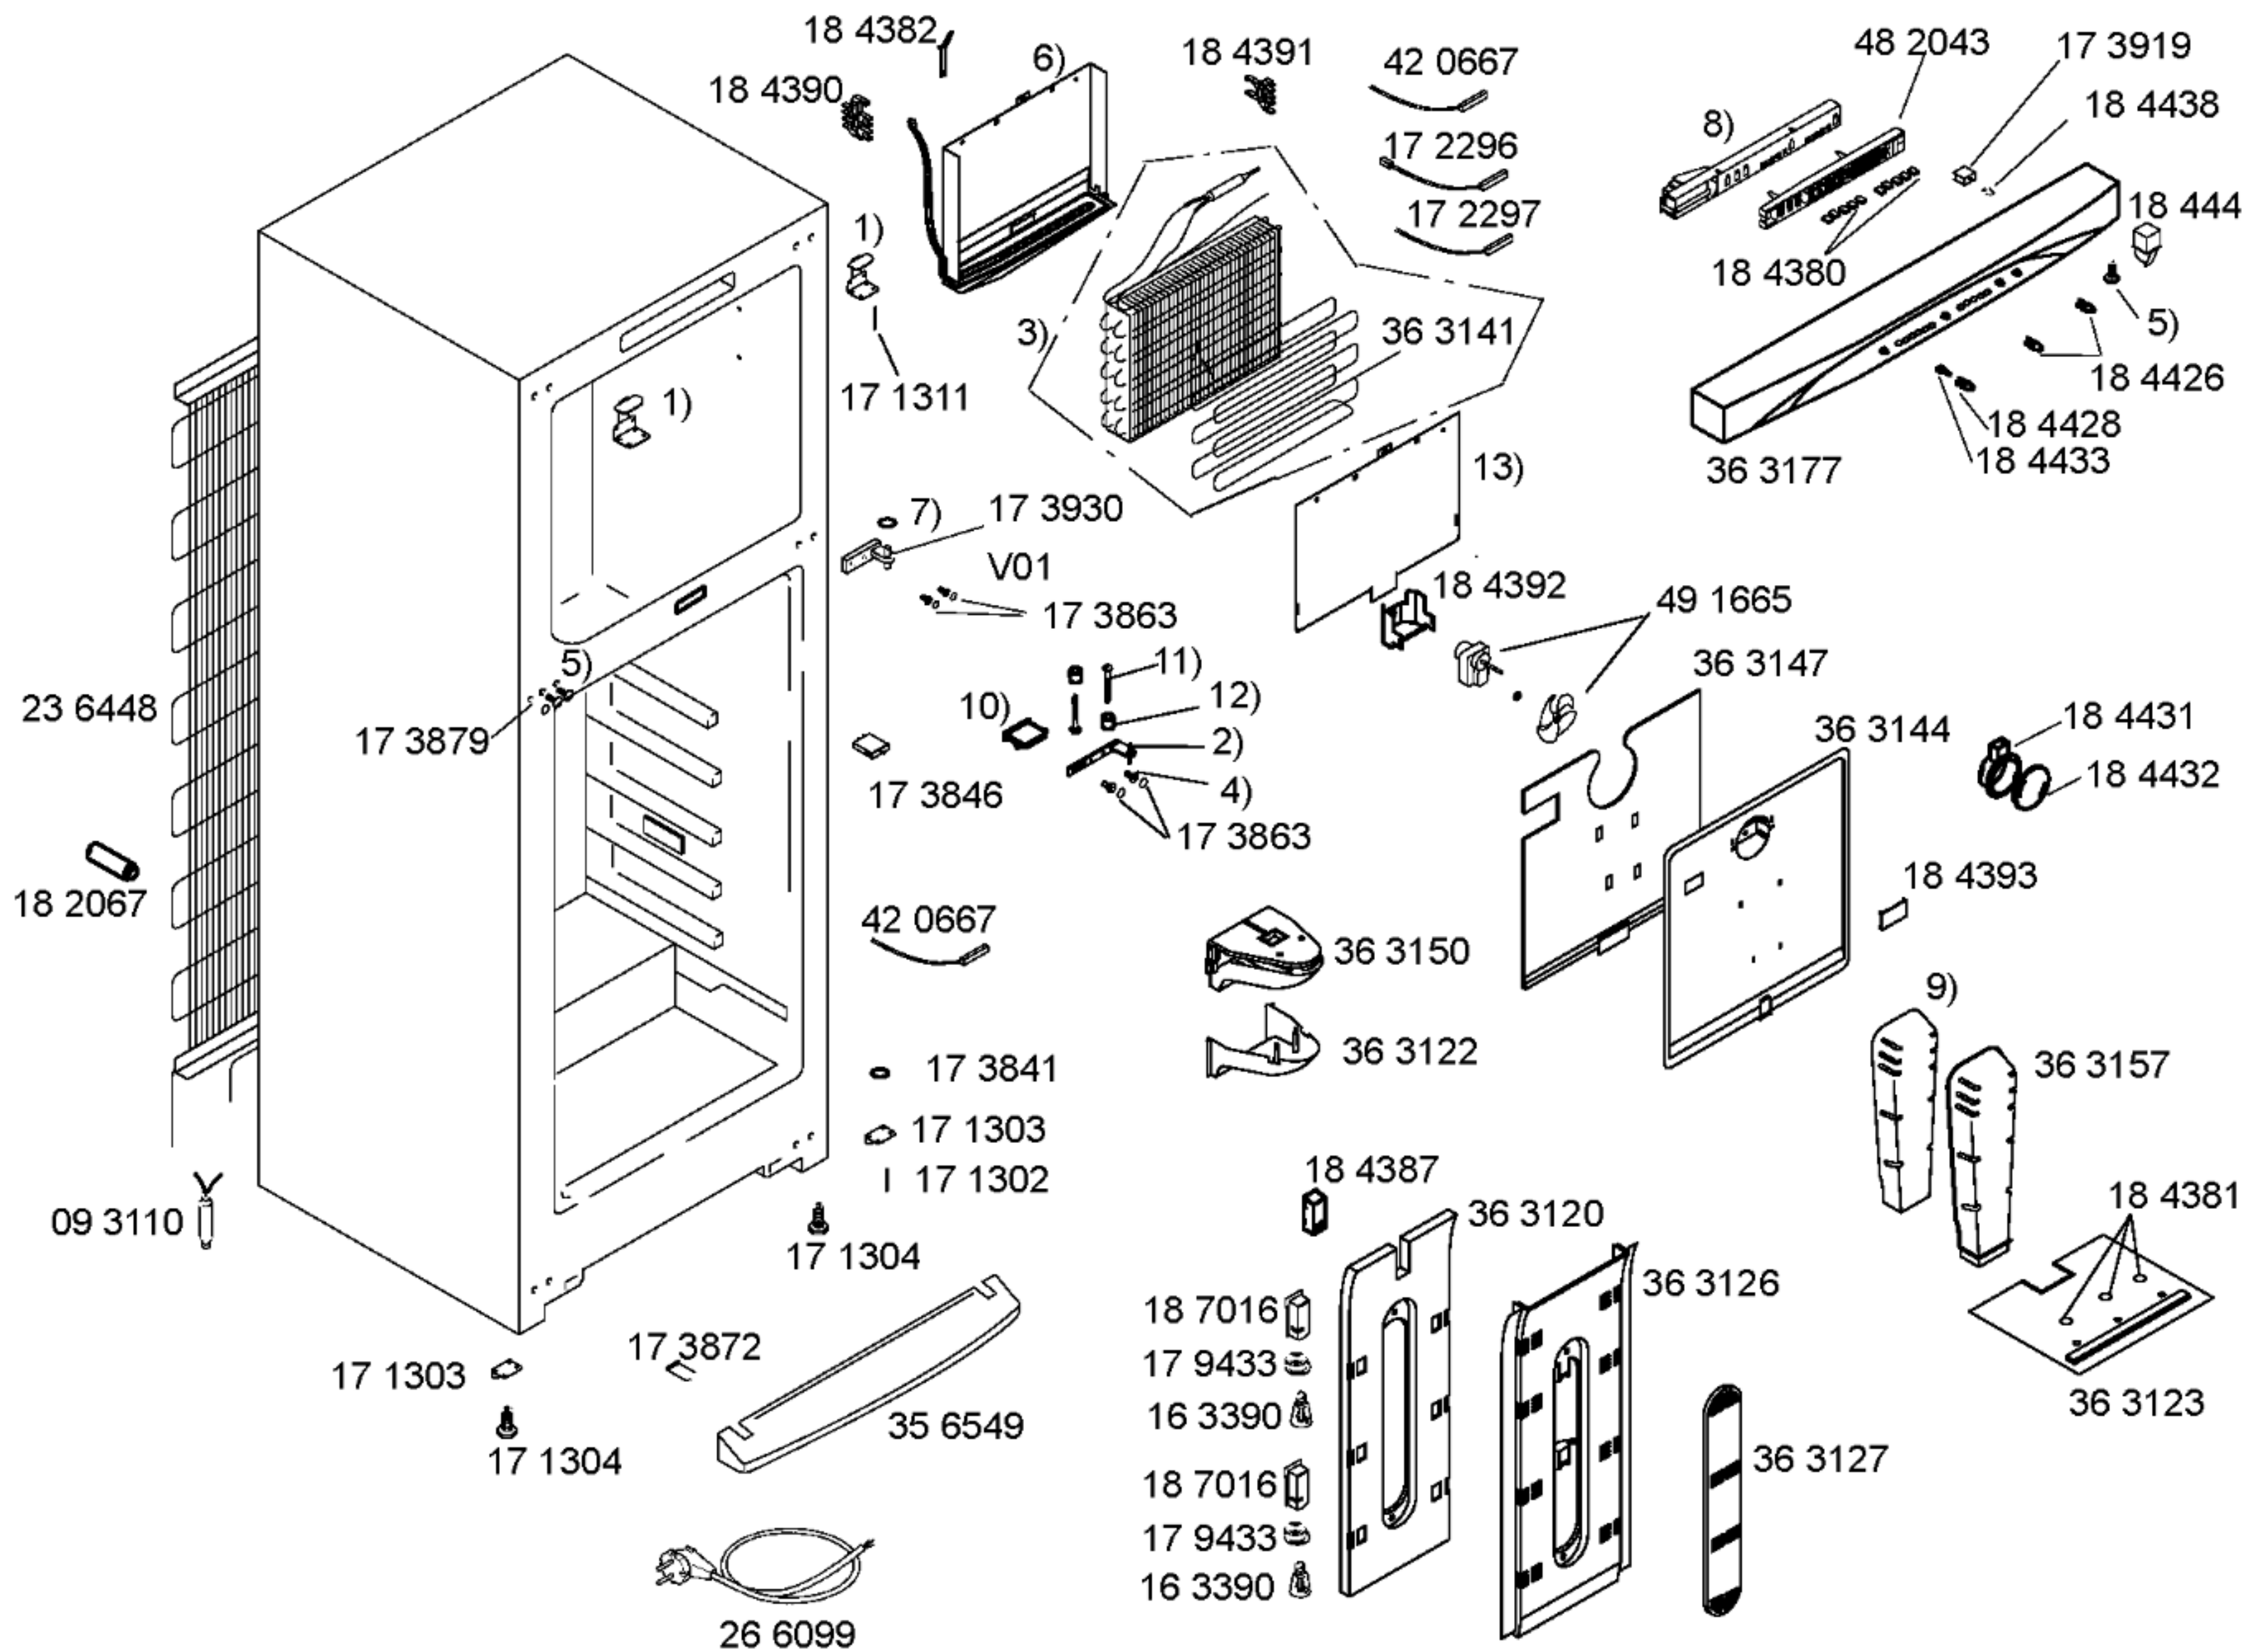


Gebrauchsanweisung  
52 9447

- 1) 17 1312
- 2) 18 8193  
V02,V03,V04,V05
- 3) 36 3137
- 4) 18 8196  
V02,V03,V04,V05
- 5) 17 3866
- 6) 36 3135
- 7) 17 3845  
V01
- 8) 48 2032  
V01,V02,V03,V04  
48 4350  
V05
- 9) 36 3158  
V01,V02  
36 6309  
V03,V04,V05
- 10) 18 8198  
V02,V03,V04,V05
- 11) 18 8194  
V02,V03,V04,V05
- 12) 18 8187  
V02,V03,V04,V05
- 13) 36 3154  
V01,V02,V03  
36 6902  
V04,V05

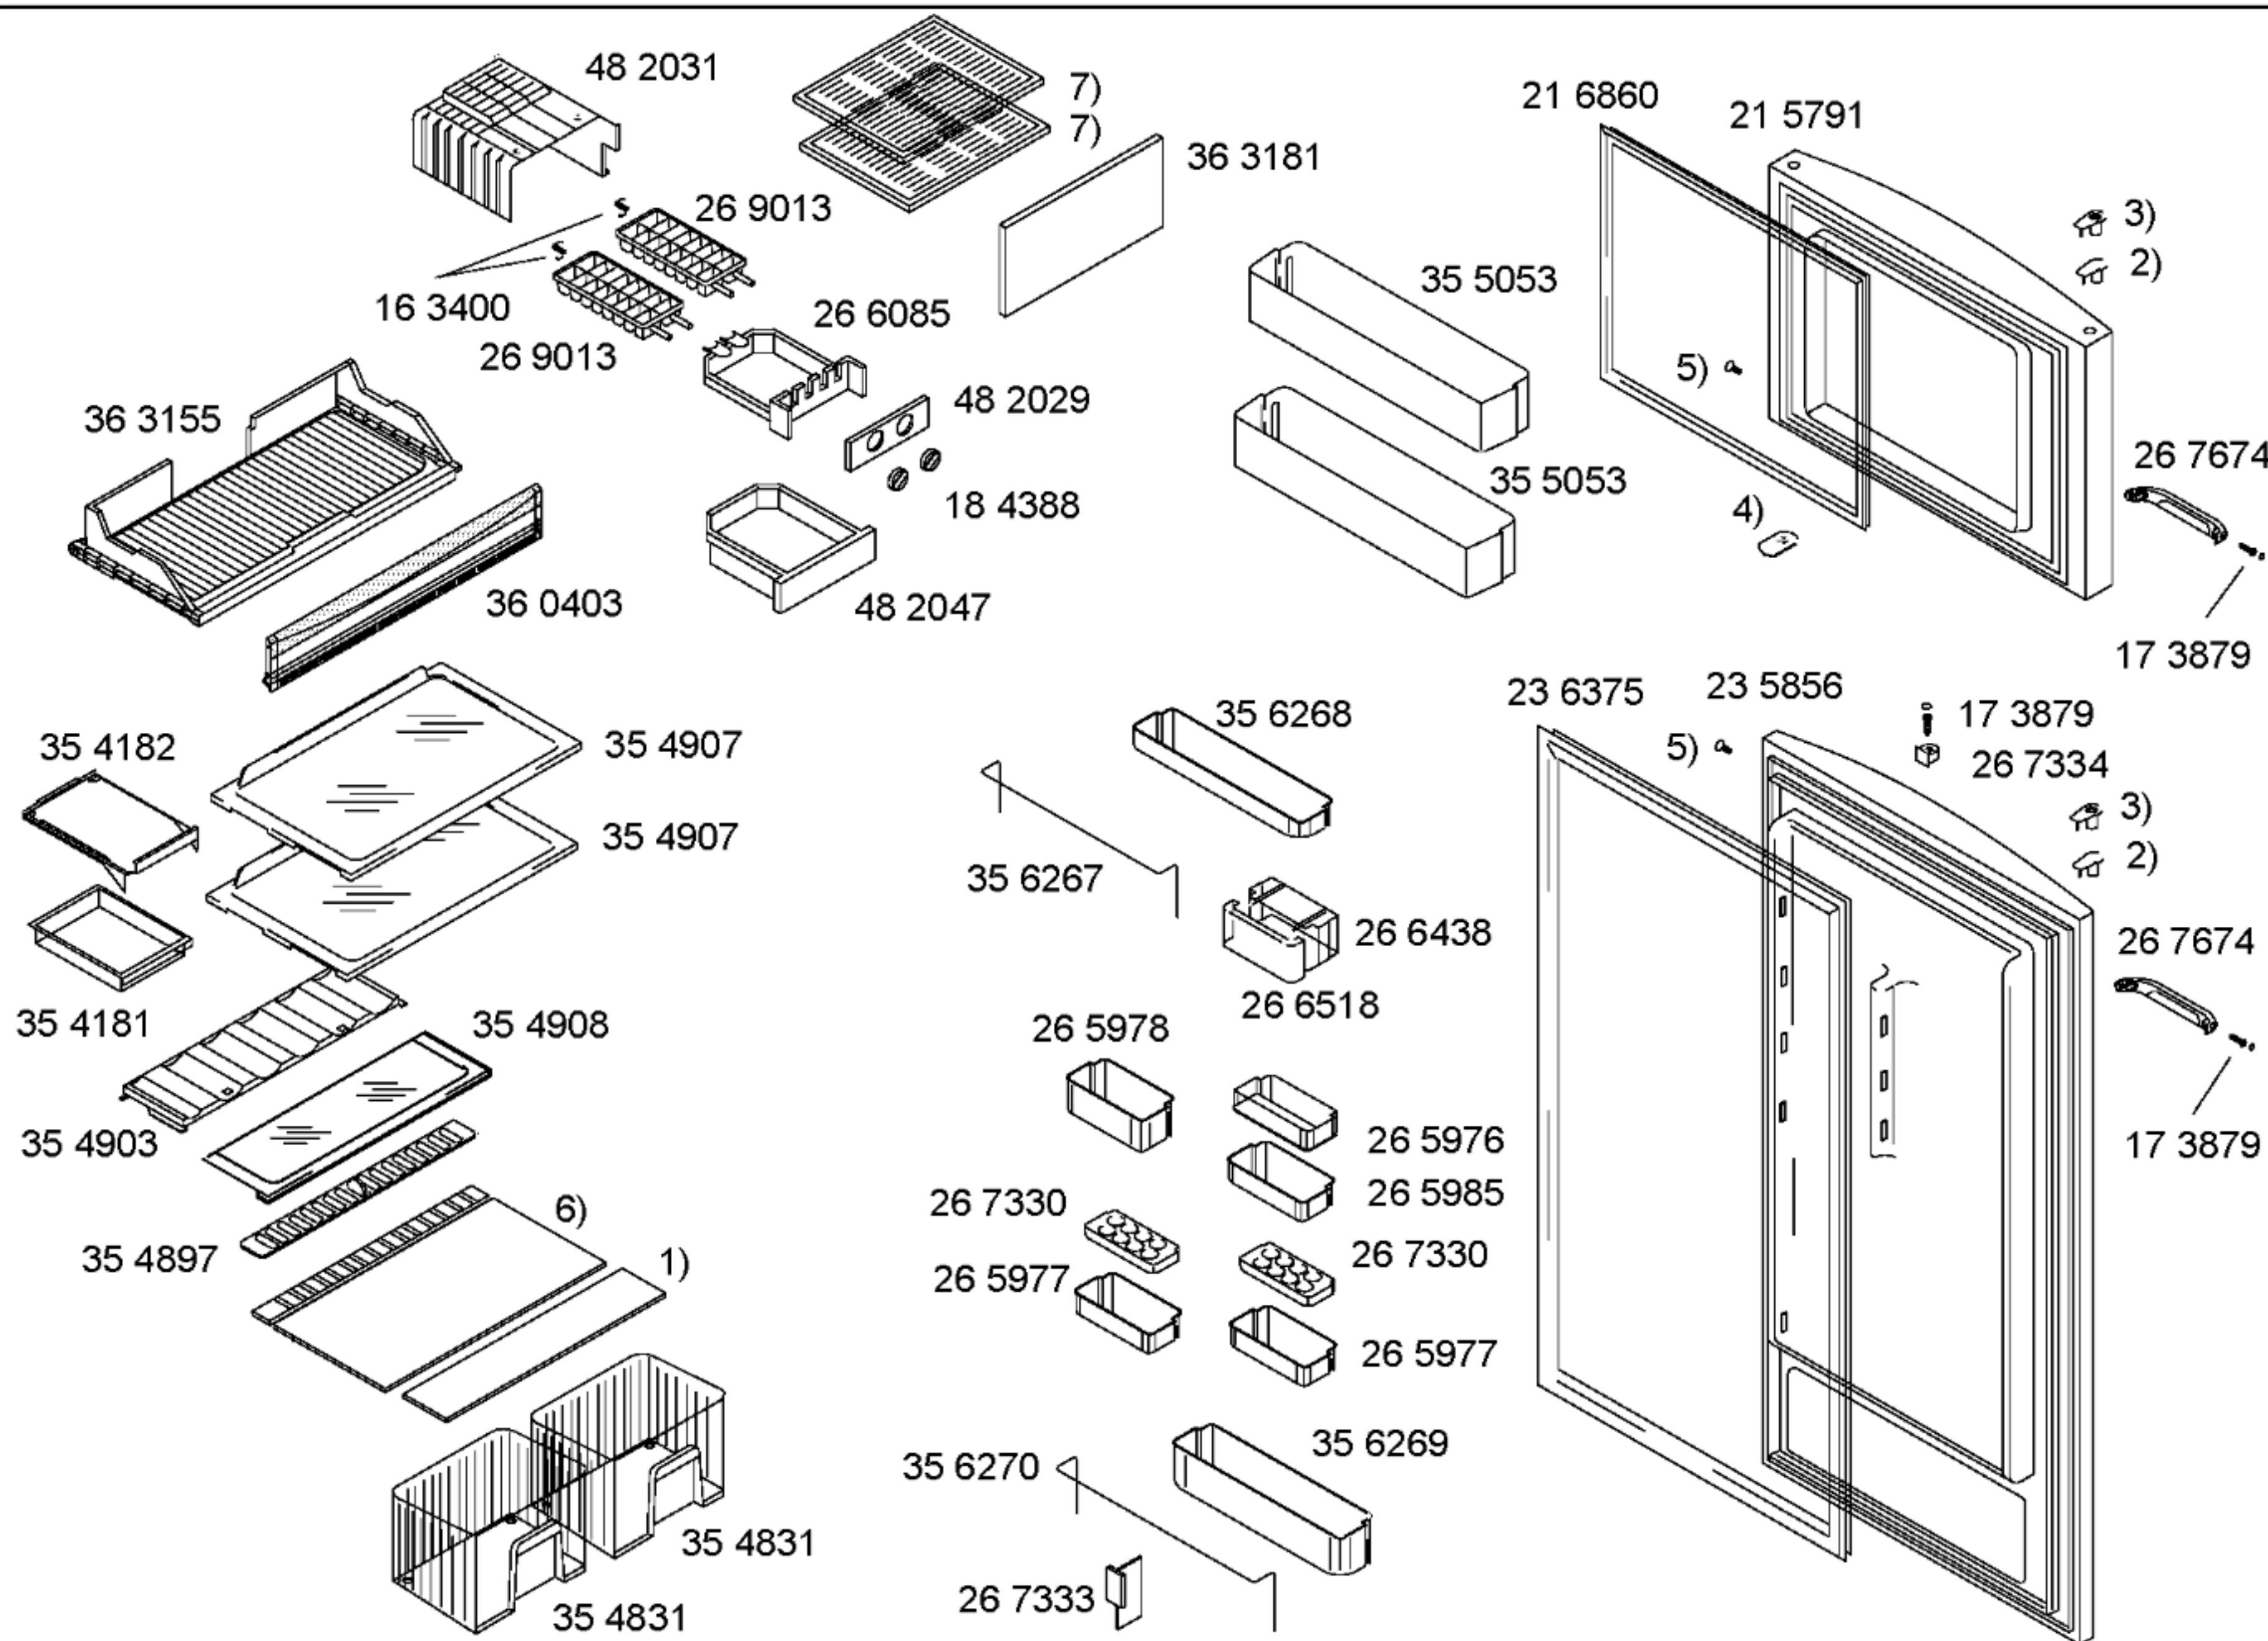

- 1) 35 8822
- 2) 17 3857
- 3) 17 3851
- 4) 17 4593
- 5) 17 3862
- 6) 36 1076
- 7) 36 3145

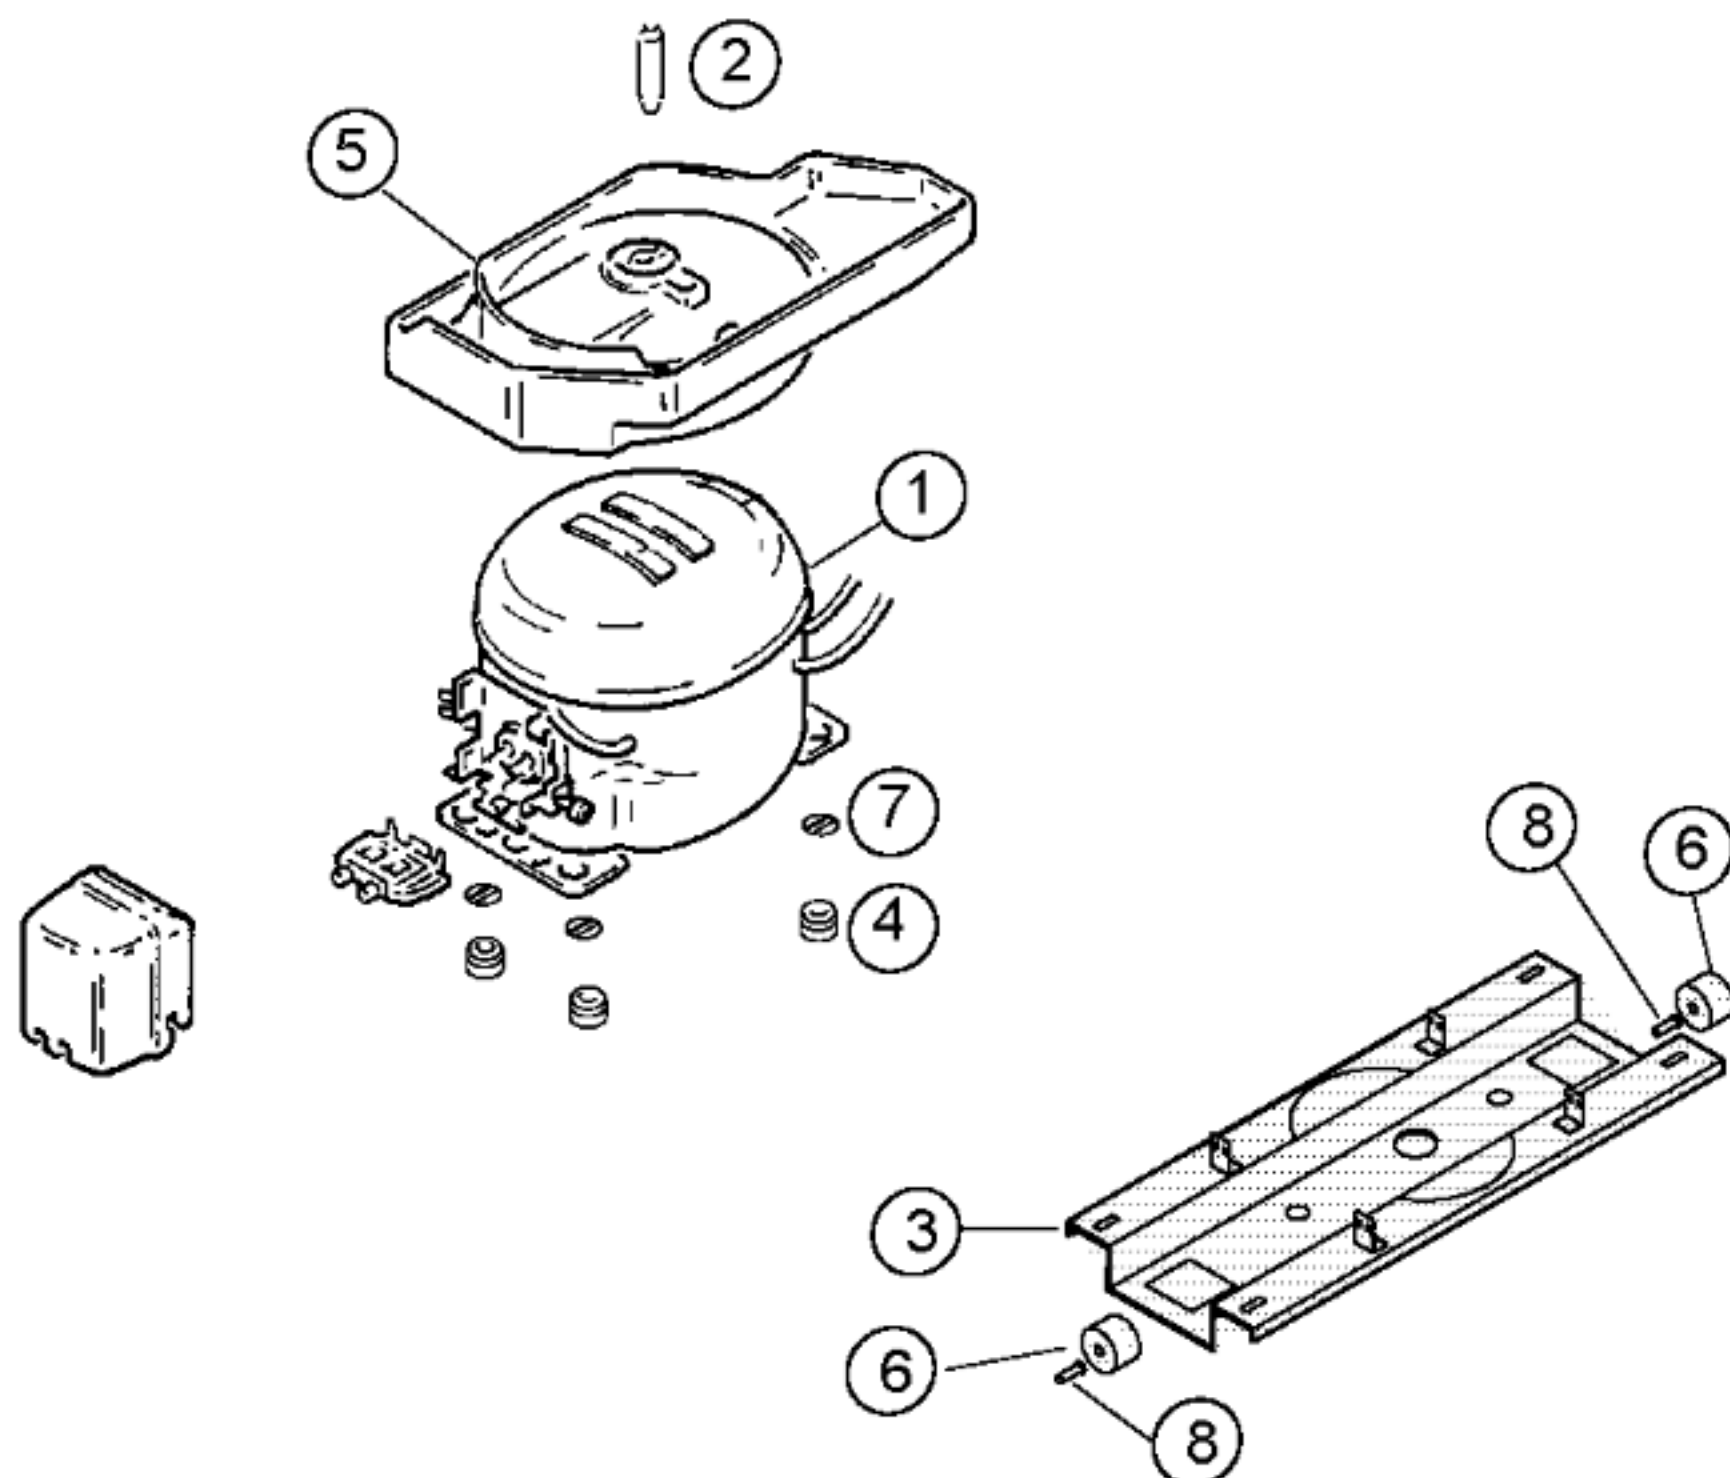

| Pos. | Aspera    |  |  |
|------|-----------|--|--|
|      | NBT 1118Y |  |  |
| 1    | 14 2194   |  |  |
| 2    | 18 4389   |  |  |
| 3    | 35 4158   |  |  |
| 4    | 16 3427   |  |  |
| 5    | 36 3166   |  |  |
| 6    | 17 1318   |  |  |
| 7    | 17 1519   |  |  |
| 8    | 18 1014   |  |  |
| 9    |           |  |  |
| 10   |           |  |  |
| 11   |           |  |  |
| 12   |           |  |  |

| TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER   |               |              |             |           |
|---------------------------------------------------|---------------|--------------|-------------|-----------|
| Verdichter/Compressor/Kompresör                   |               | Aspera       |             |           |
| Typ/Type/Tip                                      |               | NBT 1118Y    |             |           |
| Förderleistung/Delivery/Verim/h                   |               |              |             |           |
| Anlaufstrom/Starting current/Giris akimi          | A             | 7            |             |           |
| Widerstand/Resistance/Rezistans Ha/               | Ω             | 11           |             |           |
| Hi/aux.                                           |               | 16.4         |             |           |
| Temp.Reyler/Thermostat/Termostat                  |               | Elektronisch |             |           |
| Typ/Type/Tip                                      |               |              |             |           |
| Reglerstellung/Position/Termostat pozisyonu       |               |              |             |           |
| Schaltwerte/Acta kapama degerleri                 | ..ein/acma °C |              |             |           |
| Valeurs de commutation/Termostat degeri           | ..aus"/kapama |              |             |           |
| (..abtaven' od)                                   | ..alarm'      |              |             |           |
| Füllmenge/Fill. quantity/ Dolum miktarı           |               | R600a        |             |           |
|                                                   |               | g            |             |           |
| Anschlusswert/Comm. load/Giris gucu               |               | W            | 200         |           |
| Heizung/Heater/Rezistans                          |               | Verdampfer   | Ablaufrinne | Klappe    |
| Widerstand/Resistance/Direnc                      |               | Ω            |             | 4-V01,5   |
| Leistung/Power/Guc (Annehmbare min Werte in 220V) |               | W            | 200         | 61        |
|                                                   |               |              |             | 3-V02,3,4 |
| Ventilador/Blower/Vantilatör                      |               | Verdampfer   |             |           |
| Widerstand/Resistance/Rezistans                   |               | Ω            |             |           |
| Magnetventil/Magnetic valve/Manyetik valf         |               |              |             |           |
| Widerstand/Resistance/Rezistans                   |               | Ω            |             |           |
| Spannung/Voltage/Gerilim                          |               | V            |             |           |
| Temp.Reyler/Thermostat/Termostat                  |               |              |             |           |

\* Siehe Typenschild/Mamul etiketine bakınız