



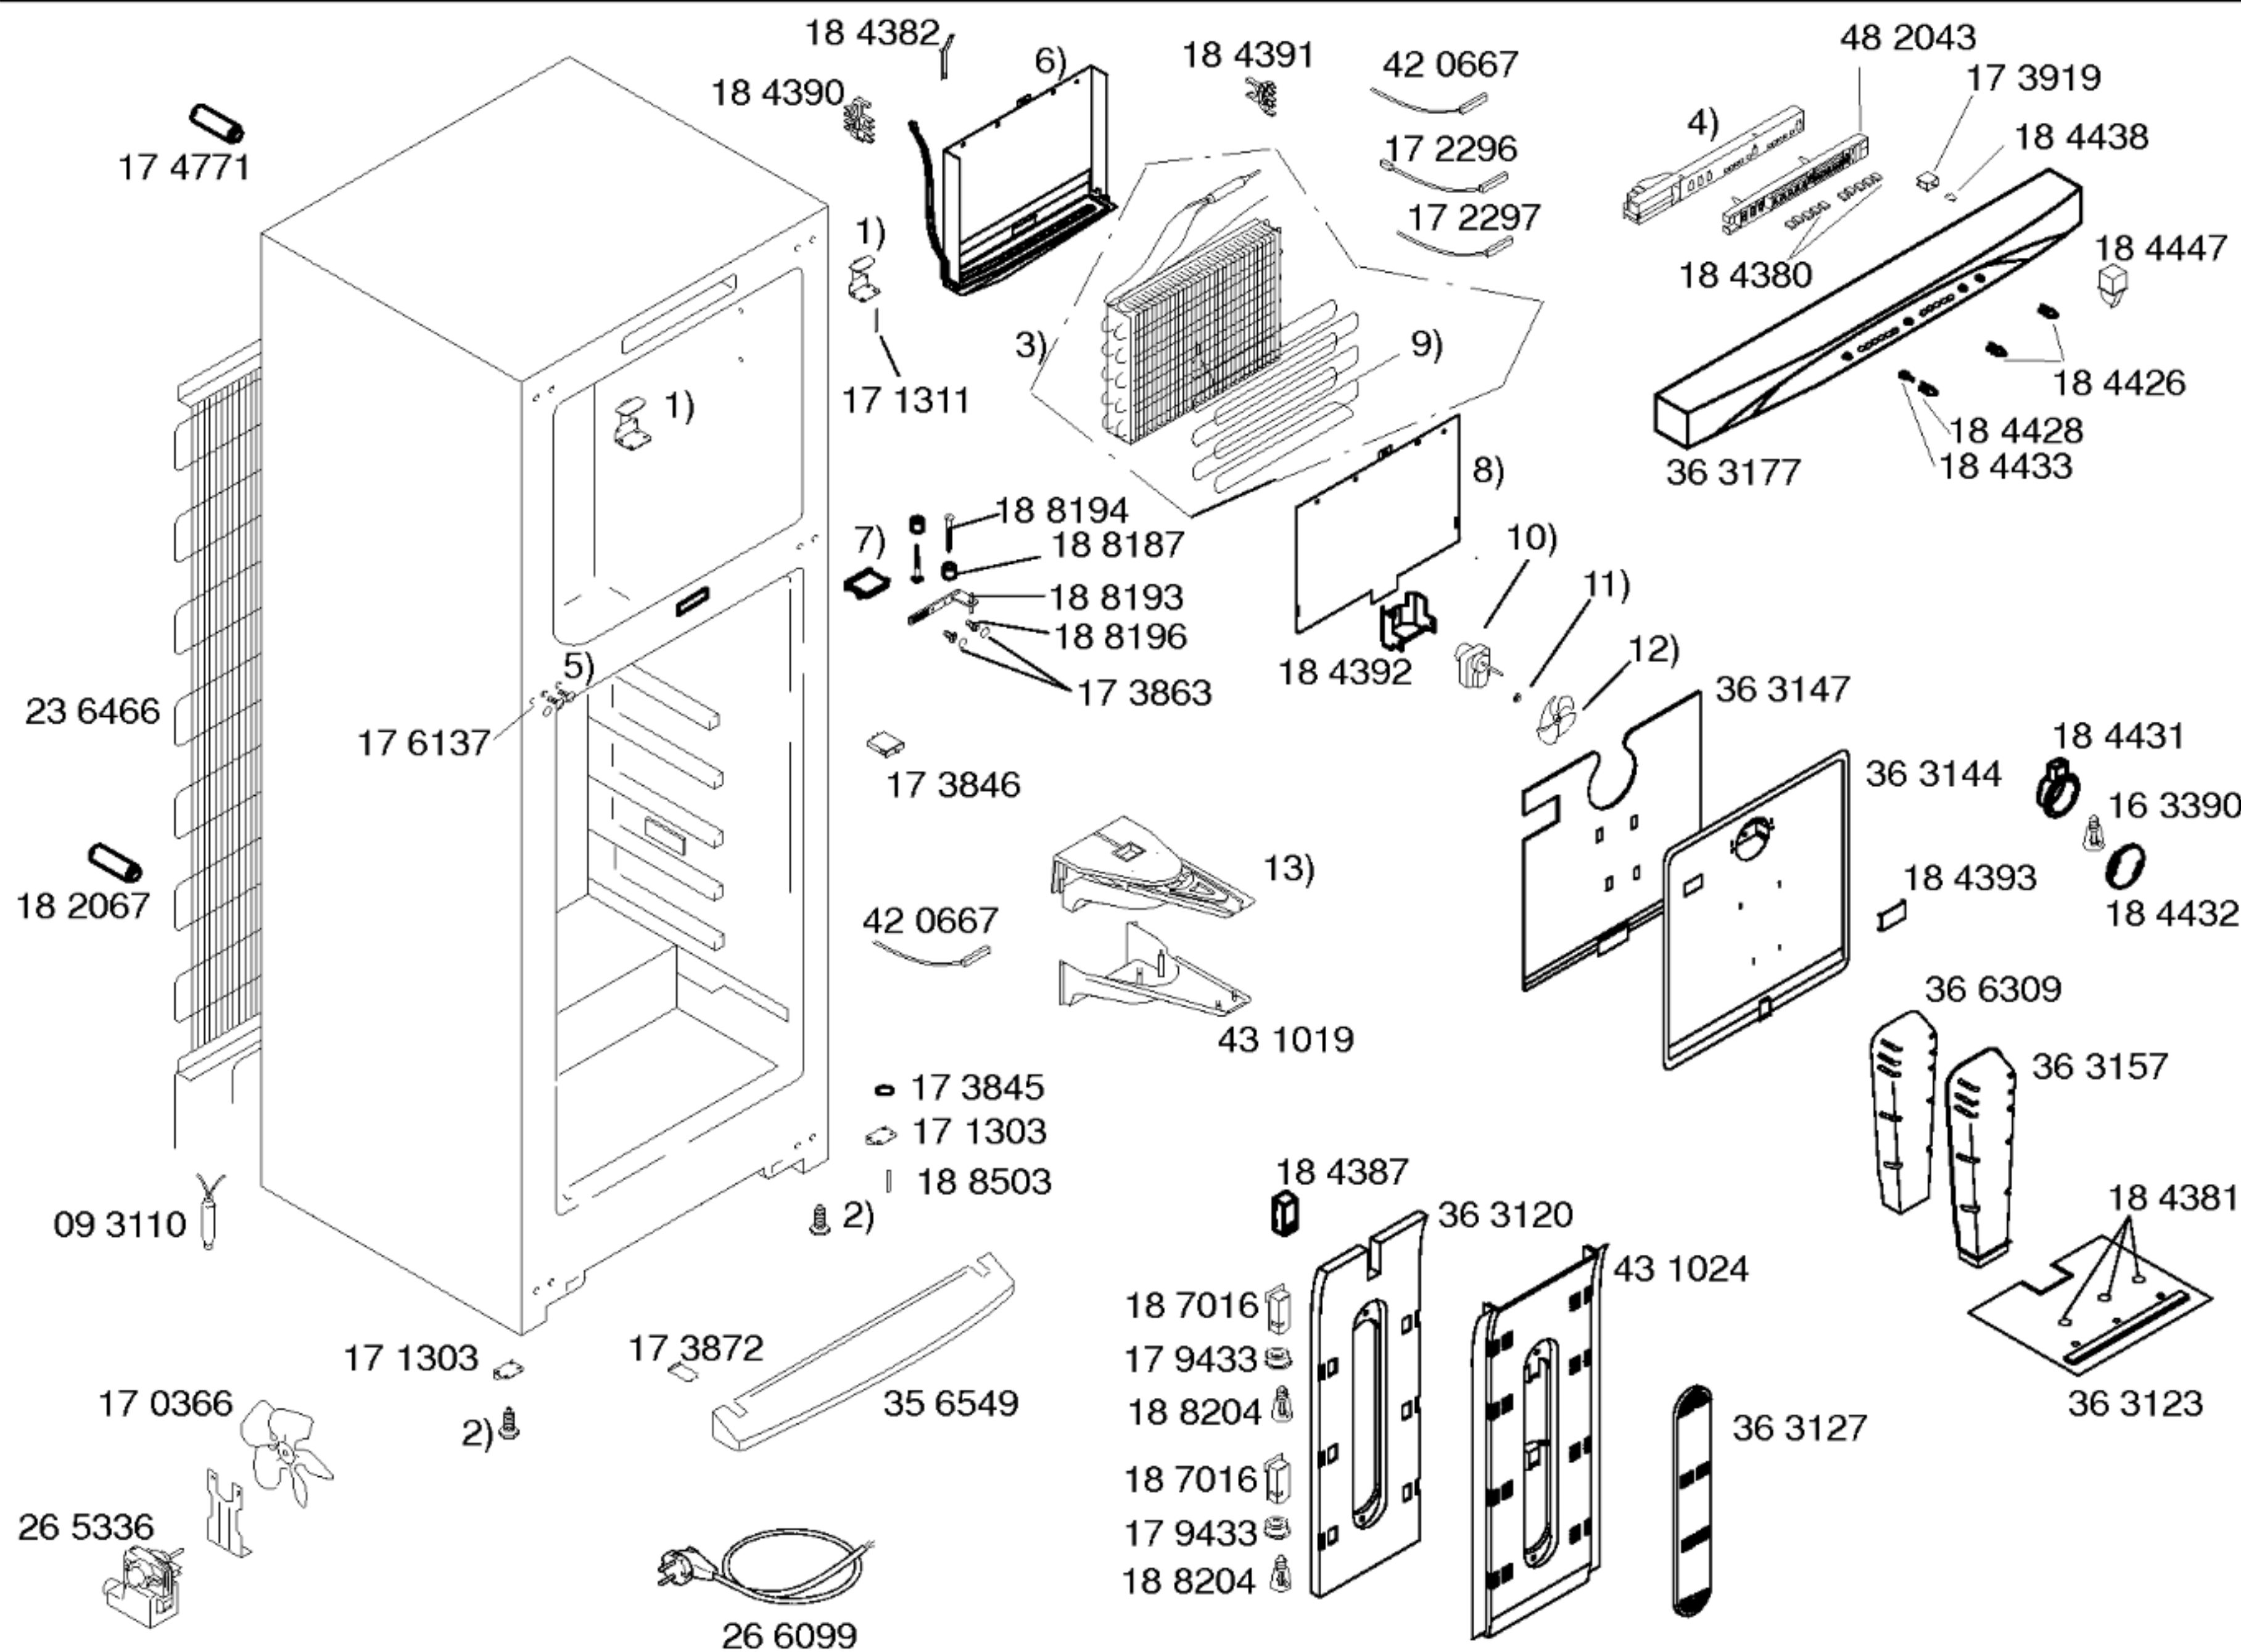

Mat. - Nr. - Konstante
3740


Gebrauchsanweisung
58 2907

- 1) 17 1312
- 2) 18 9089
- 3) 36 9815
- 4) 48 4350
- V01,V02,V03,V04
- 48 9131
- V05,V06,V07,V08
- V09
- 5) 17 3866
- 6) 36 9905
- 7) 18 8198
- V01,V02,V03,V04
- 41 8169
- V05,V06,V07,V08
- V09
- 8) 36 6902
- 9) 36 9816
- 10) 48 8433
- 11) 17 1508
- 12) 17 1565
- 13) 74 1547

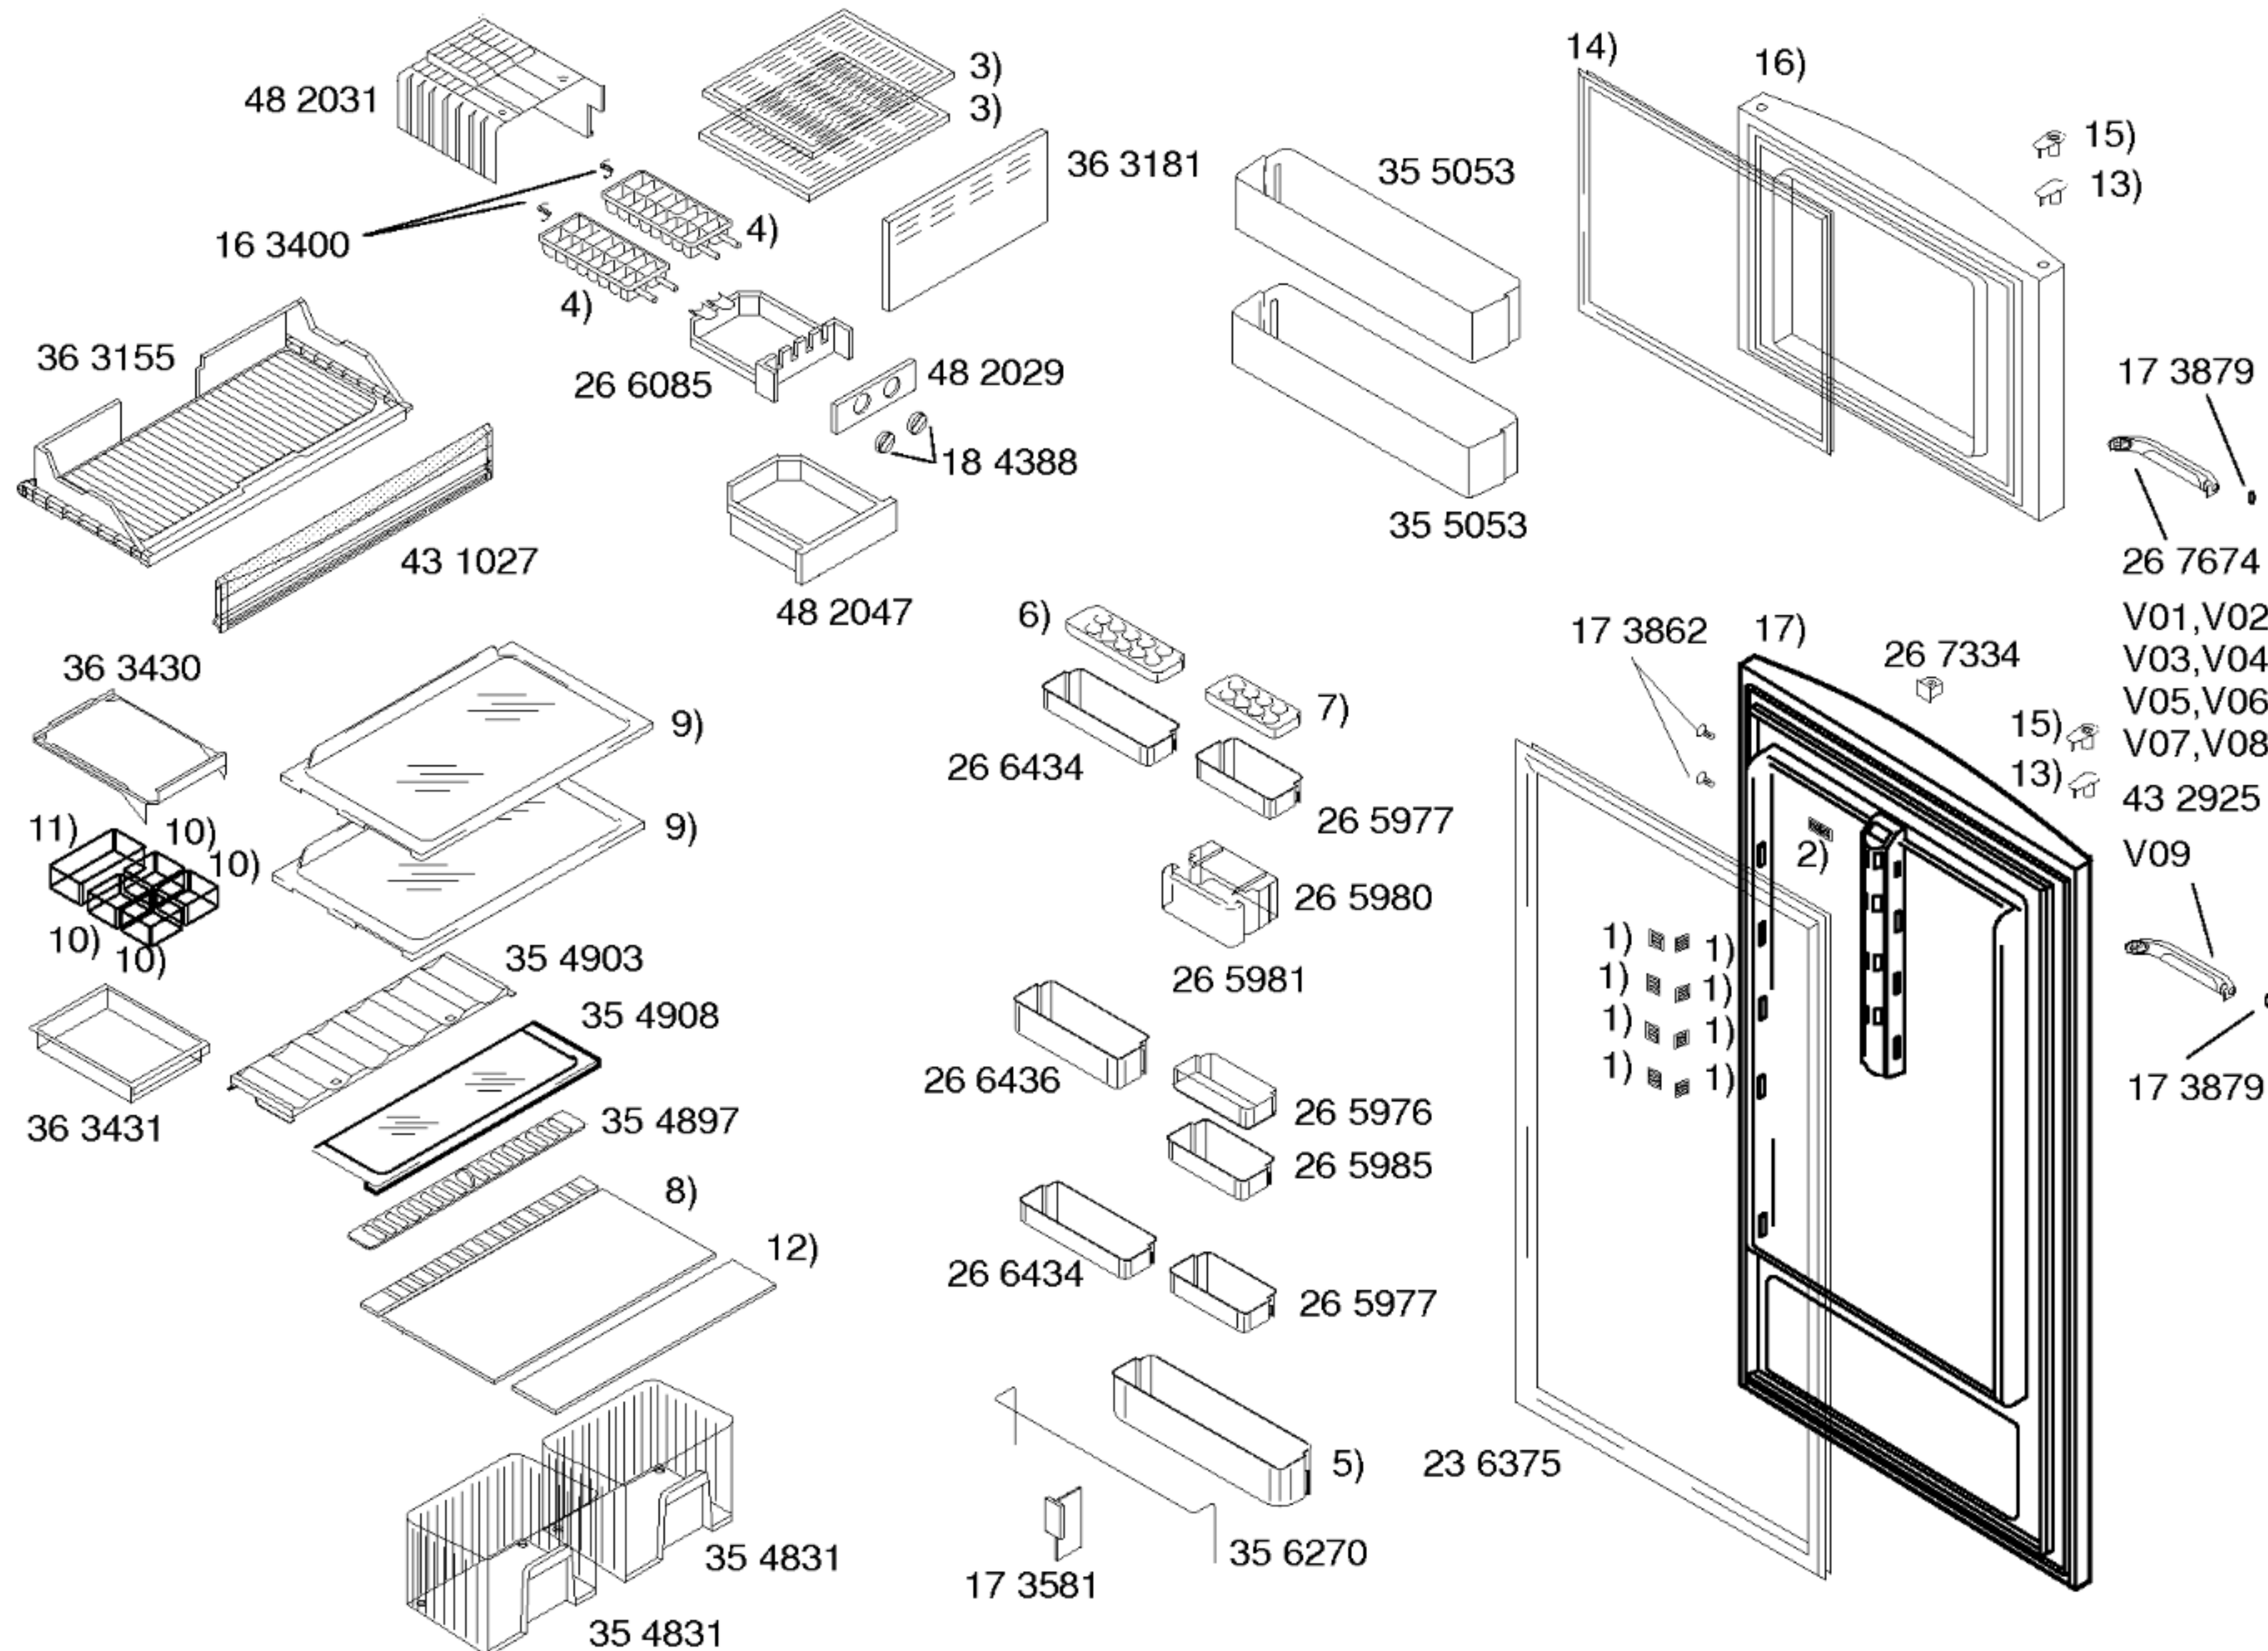

Mat. - Nr. - Konstante
3740

- 1) 41 6843
- 2) 41 6844
- 3) 36 3145
- 4) 26 9013
- V01,V02,V03,V04
- V05
- 48 9738
- V06,V07,V08,V09
- 5) 35 6269
- 6) 26 7198
- 7) 26 7186
- 8) 36 1076
- 9) 35 4907
- 10) 48 0523
- 11) 48 0522
- 12) 35 8822
- 13) 17 3857
- 14) 21 6860
- 15) 17 3851
- 16) 21 9636
- V01,V02,V03,V04
- V05,V06,V07,V08
- 47 0147
- V09
- 17) 23 9198
- V01,V02,V03,V04
- V05,V06,V07,V08
- 23 9603
- V09

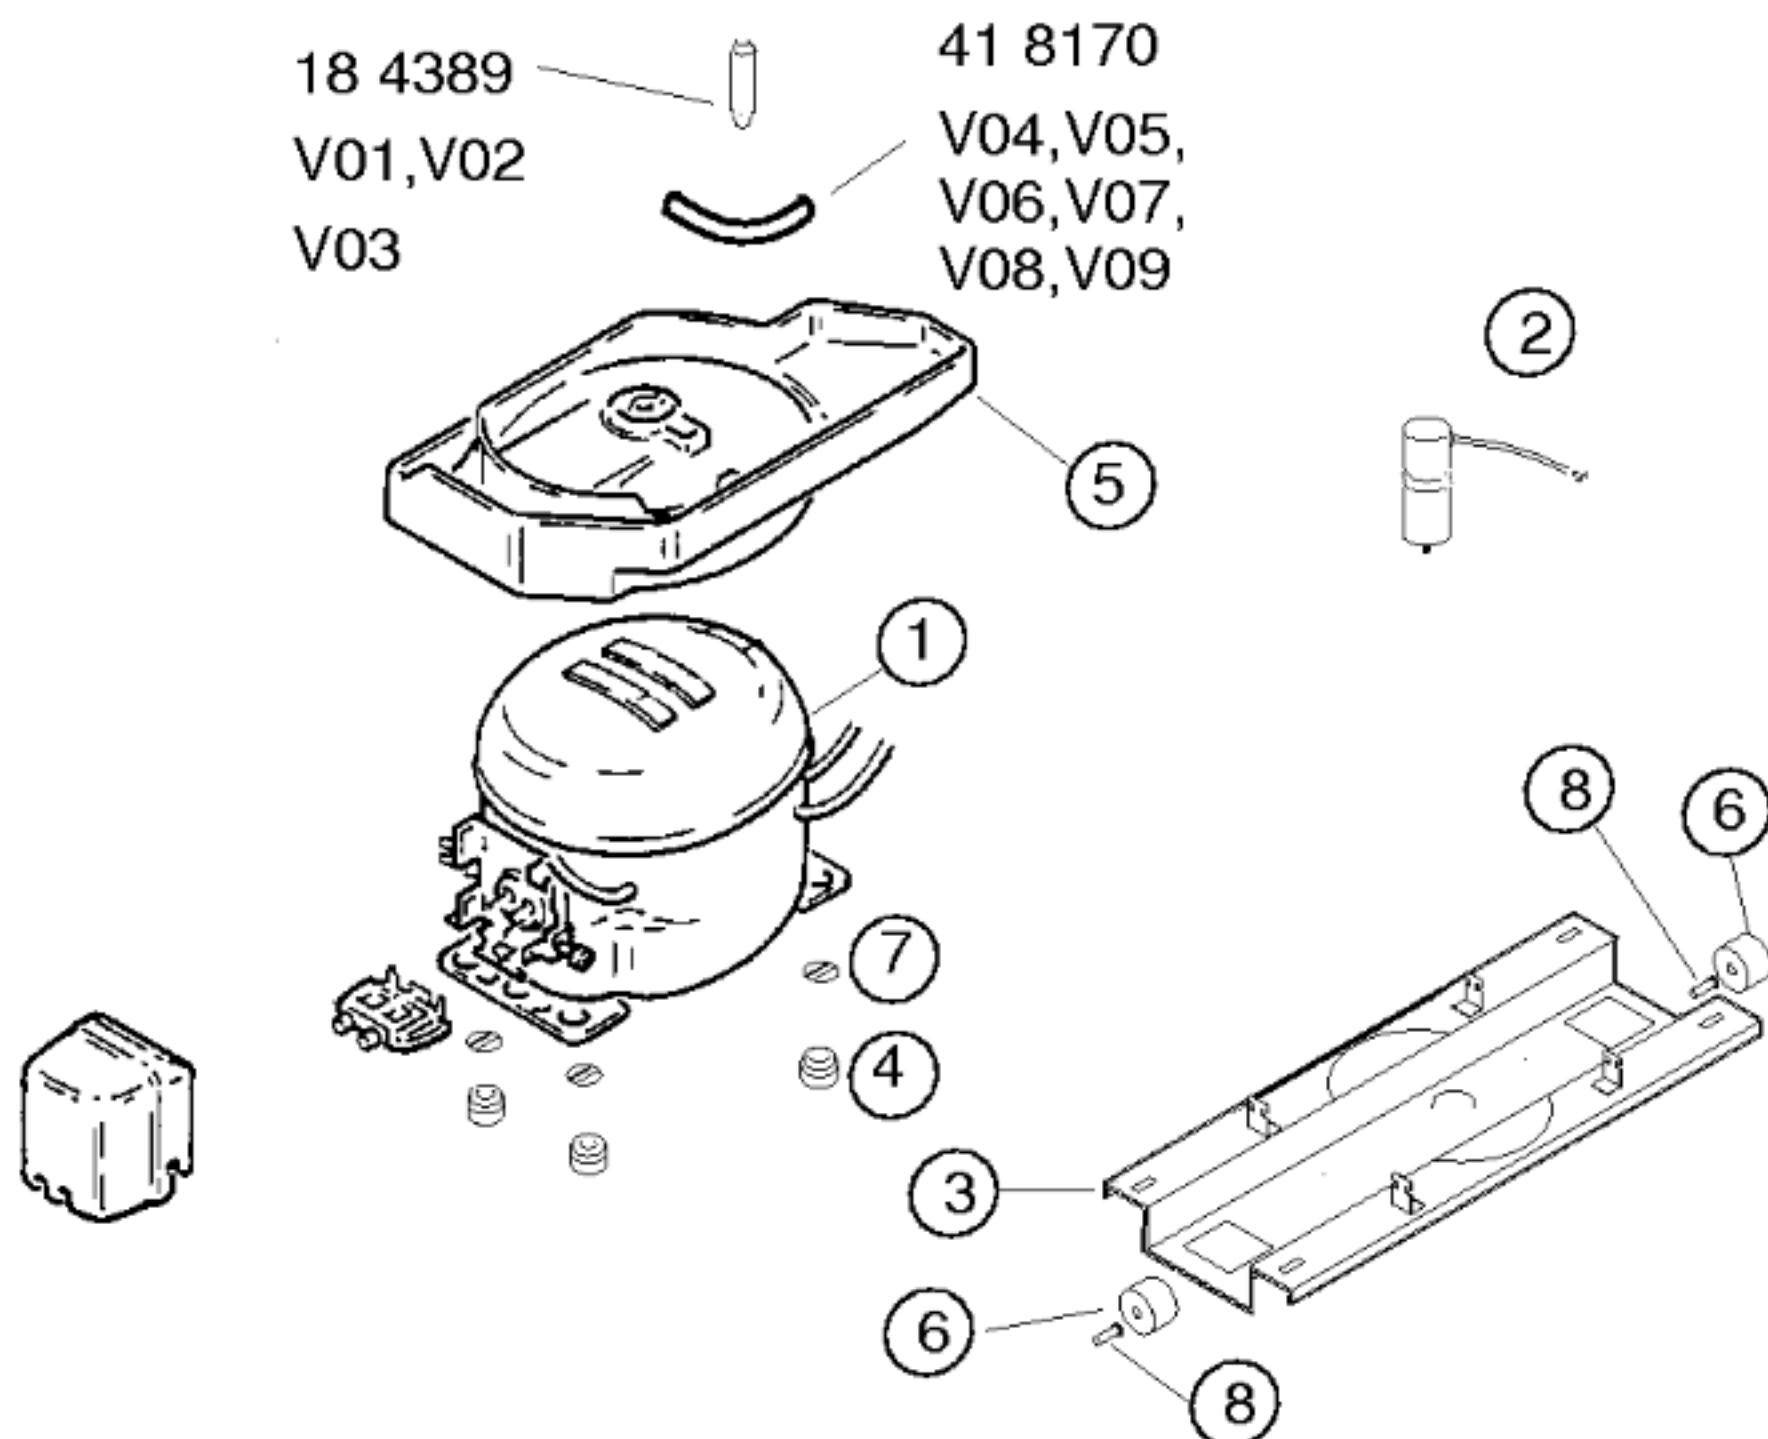

Pos.		V03,4,5,6,7,8,9	
	Danfoss		
	NLE15KTK		
1	14 2175		
2	41 6399	17 4093	
3	35 4583		
4	16 3427		
5	26 5327		
6	17 1318		
7	17 1519		
8	18 1014		
9			
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNİK BİLGİLER				
Verdichter/Compressor/Kompresör		Danfoss		
Typ/Type/Tip		NLE15KTK		
Förderleistung/Delivery/Verim/h				
Anlaufstrom/Starting current/Giris akimi		8		
Widerstand/Resistance/Rezistans Ha/Hi/aux.				
Temp.Reyler/Thermostat/Termostat		Elektronisch		
Typ/Type/Tip				
Reglerstellung/Position/Termostat pozisyonu				
Schaltwerte/Actma kapama degerleri		..ein/acma °C		
Valeurs de commutation/Termostat degeri		..aus"/kapama		
(..abtaven' od)		..alarm'		
Füllmenge/Fill. quantily/ Dolum miktari		R600	g	60
Anschlusswert/Comm. load/Giris gucu		W	215	
Heizung/Heater/Rezistans		Verdampfer	Ablaufrinne	Klappe
Widerstand/Resistance/Direnc		Ω		
Leistung/Power/Guc		W	267	81
Ventilador/Blower/Vantilatör				
Widerstand/Resistance/Rezistans		Ω		
Magnetventil/Magnetic valve/Manyetik valf				
Widerstand/Resistance/Rezistans		Ω		
Spannung/Voltage/Gerilim		V		
Temp.Reyler/Thermostat/Termostat				

* Siehe Typenschild/Mamul etiketine bakiniz