


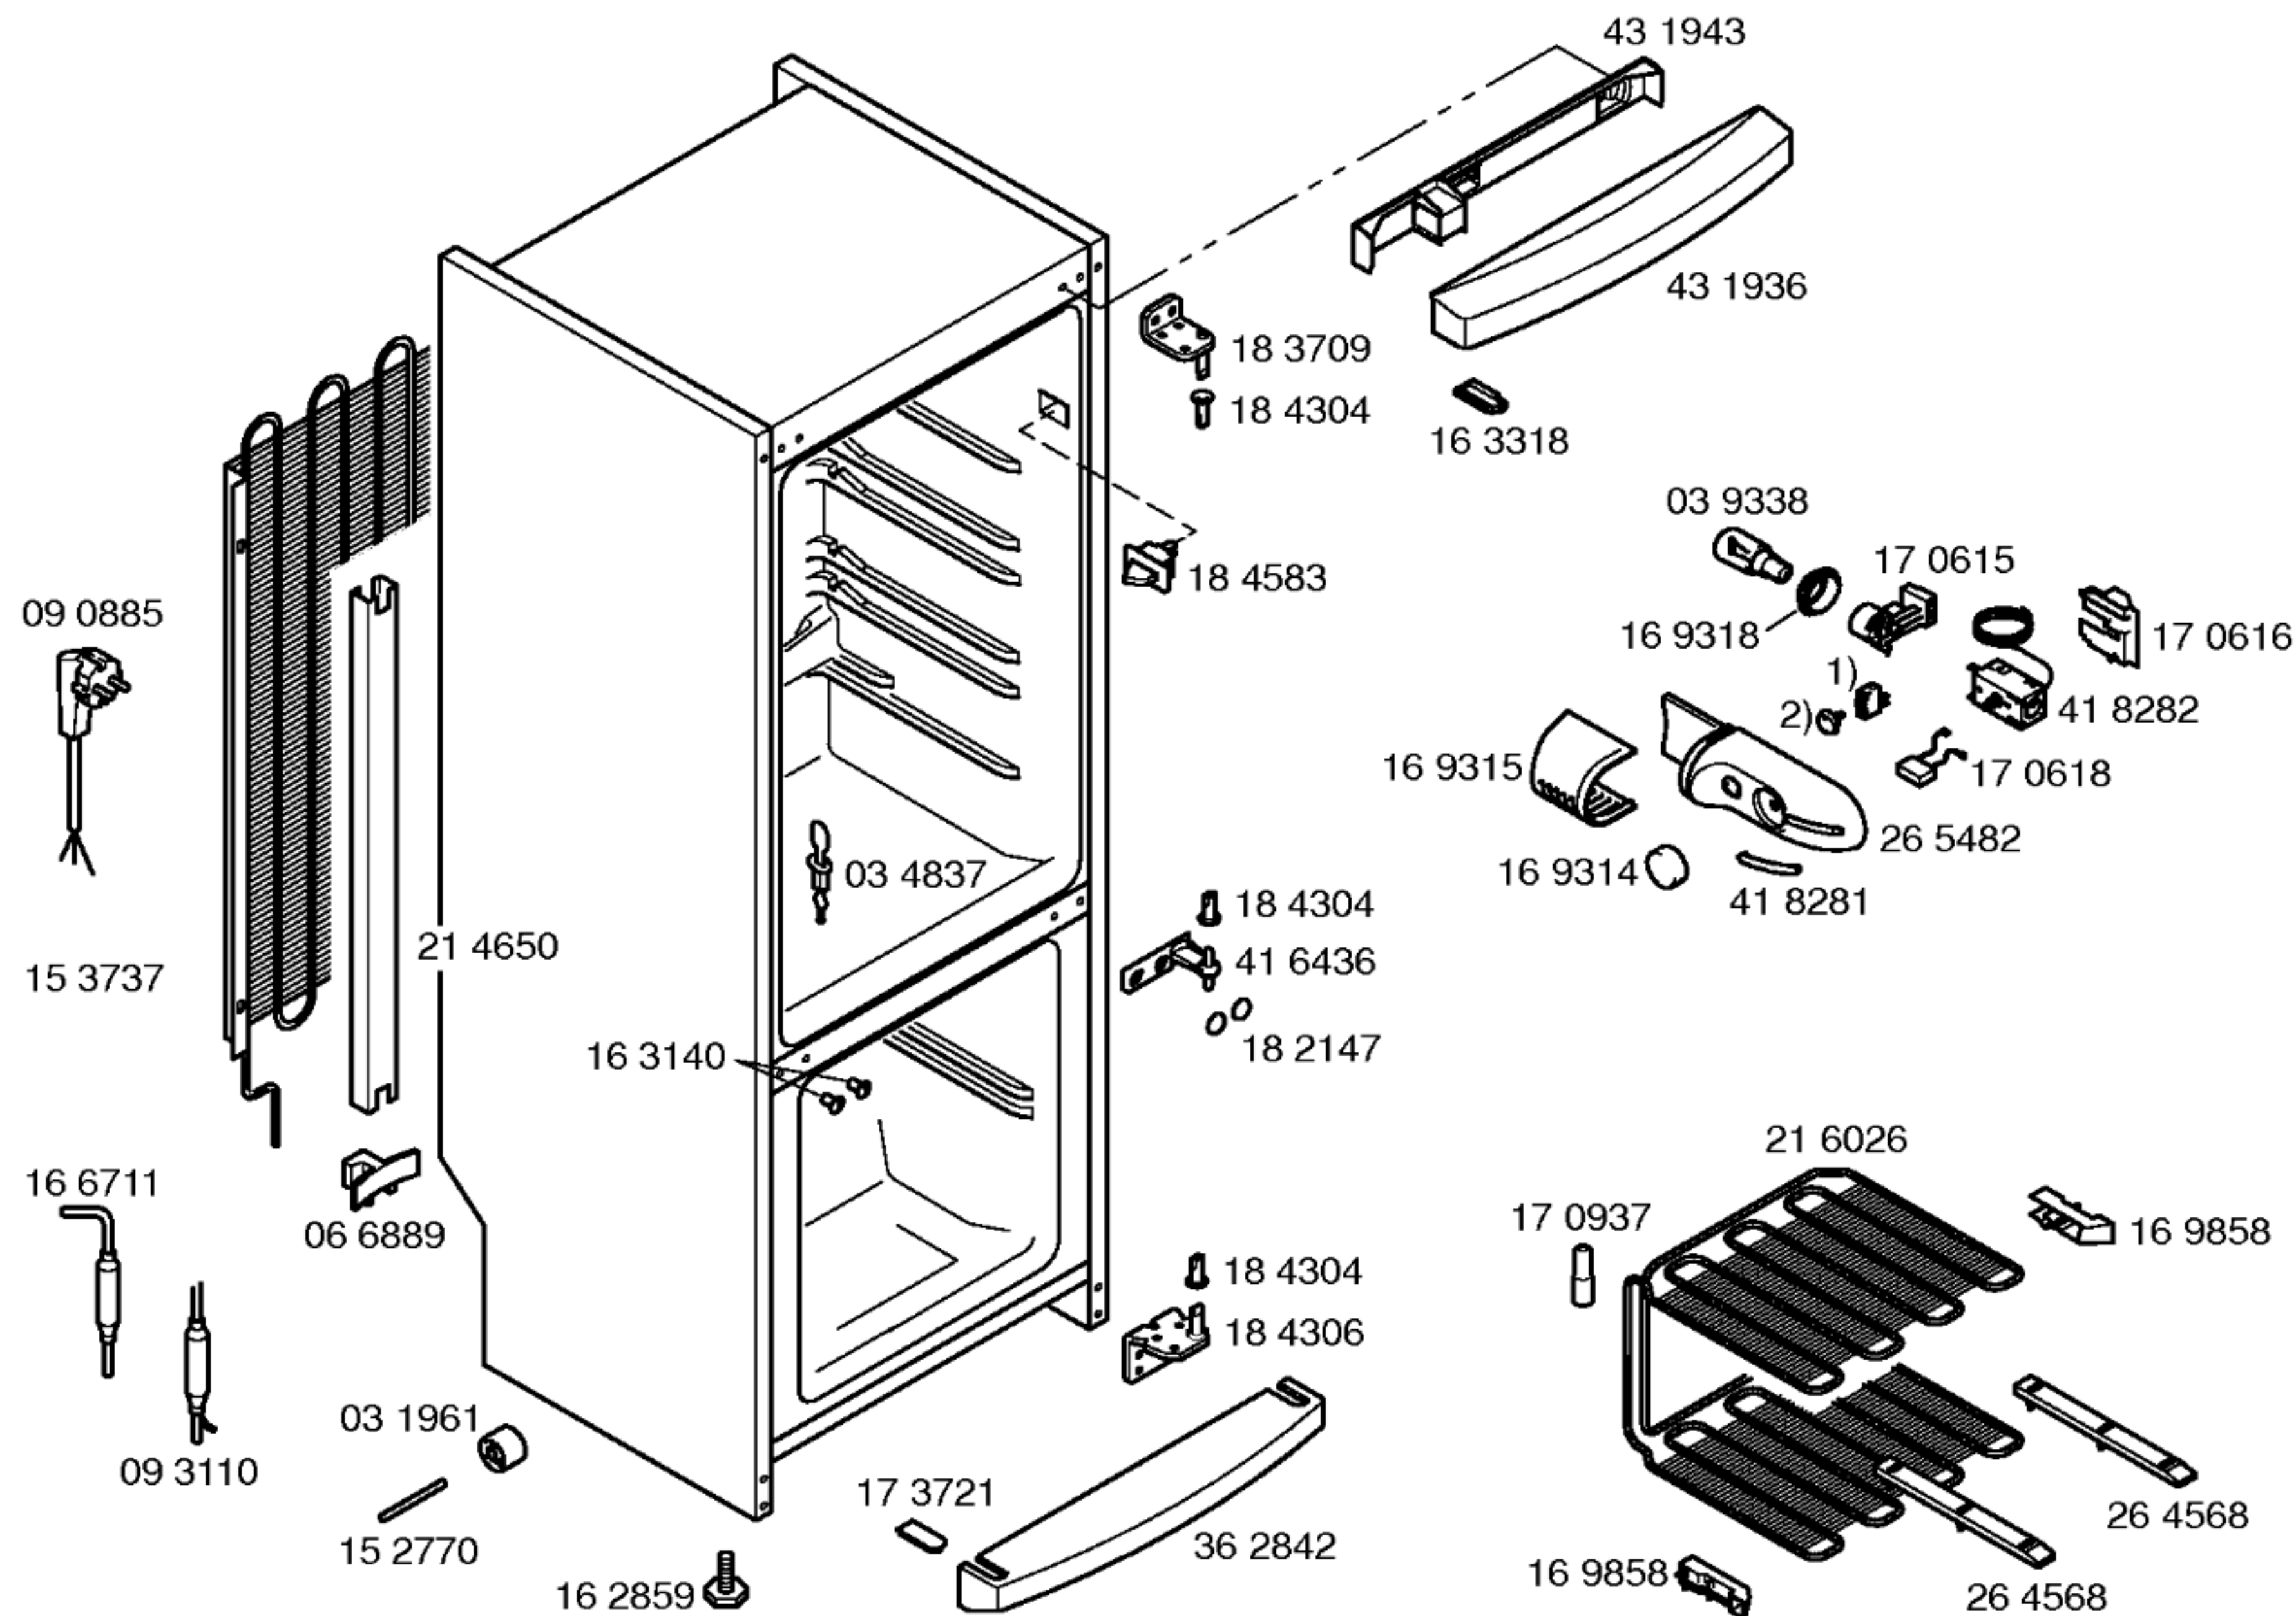



Mat. – Nr. – Konstante
3740

Gebrauchsanweisung
52 2936
(de,en,fr,nl,sv,no,fi,da)
52 9375
(hu,pl,cs)

Montageanweisung
52 9365
(de,en,fr,nl,es,it,pt,el,pl,
sv,no,fi,da,cs,hu)

1) 17 0617
2) 17 3206

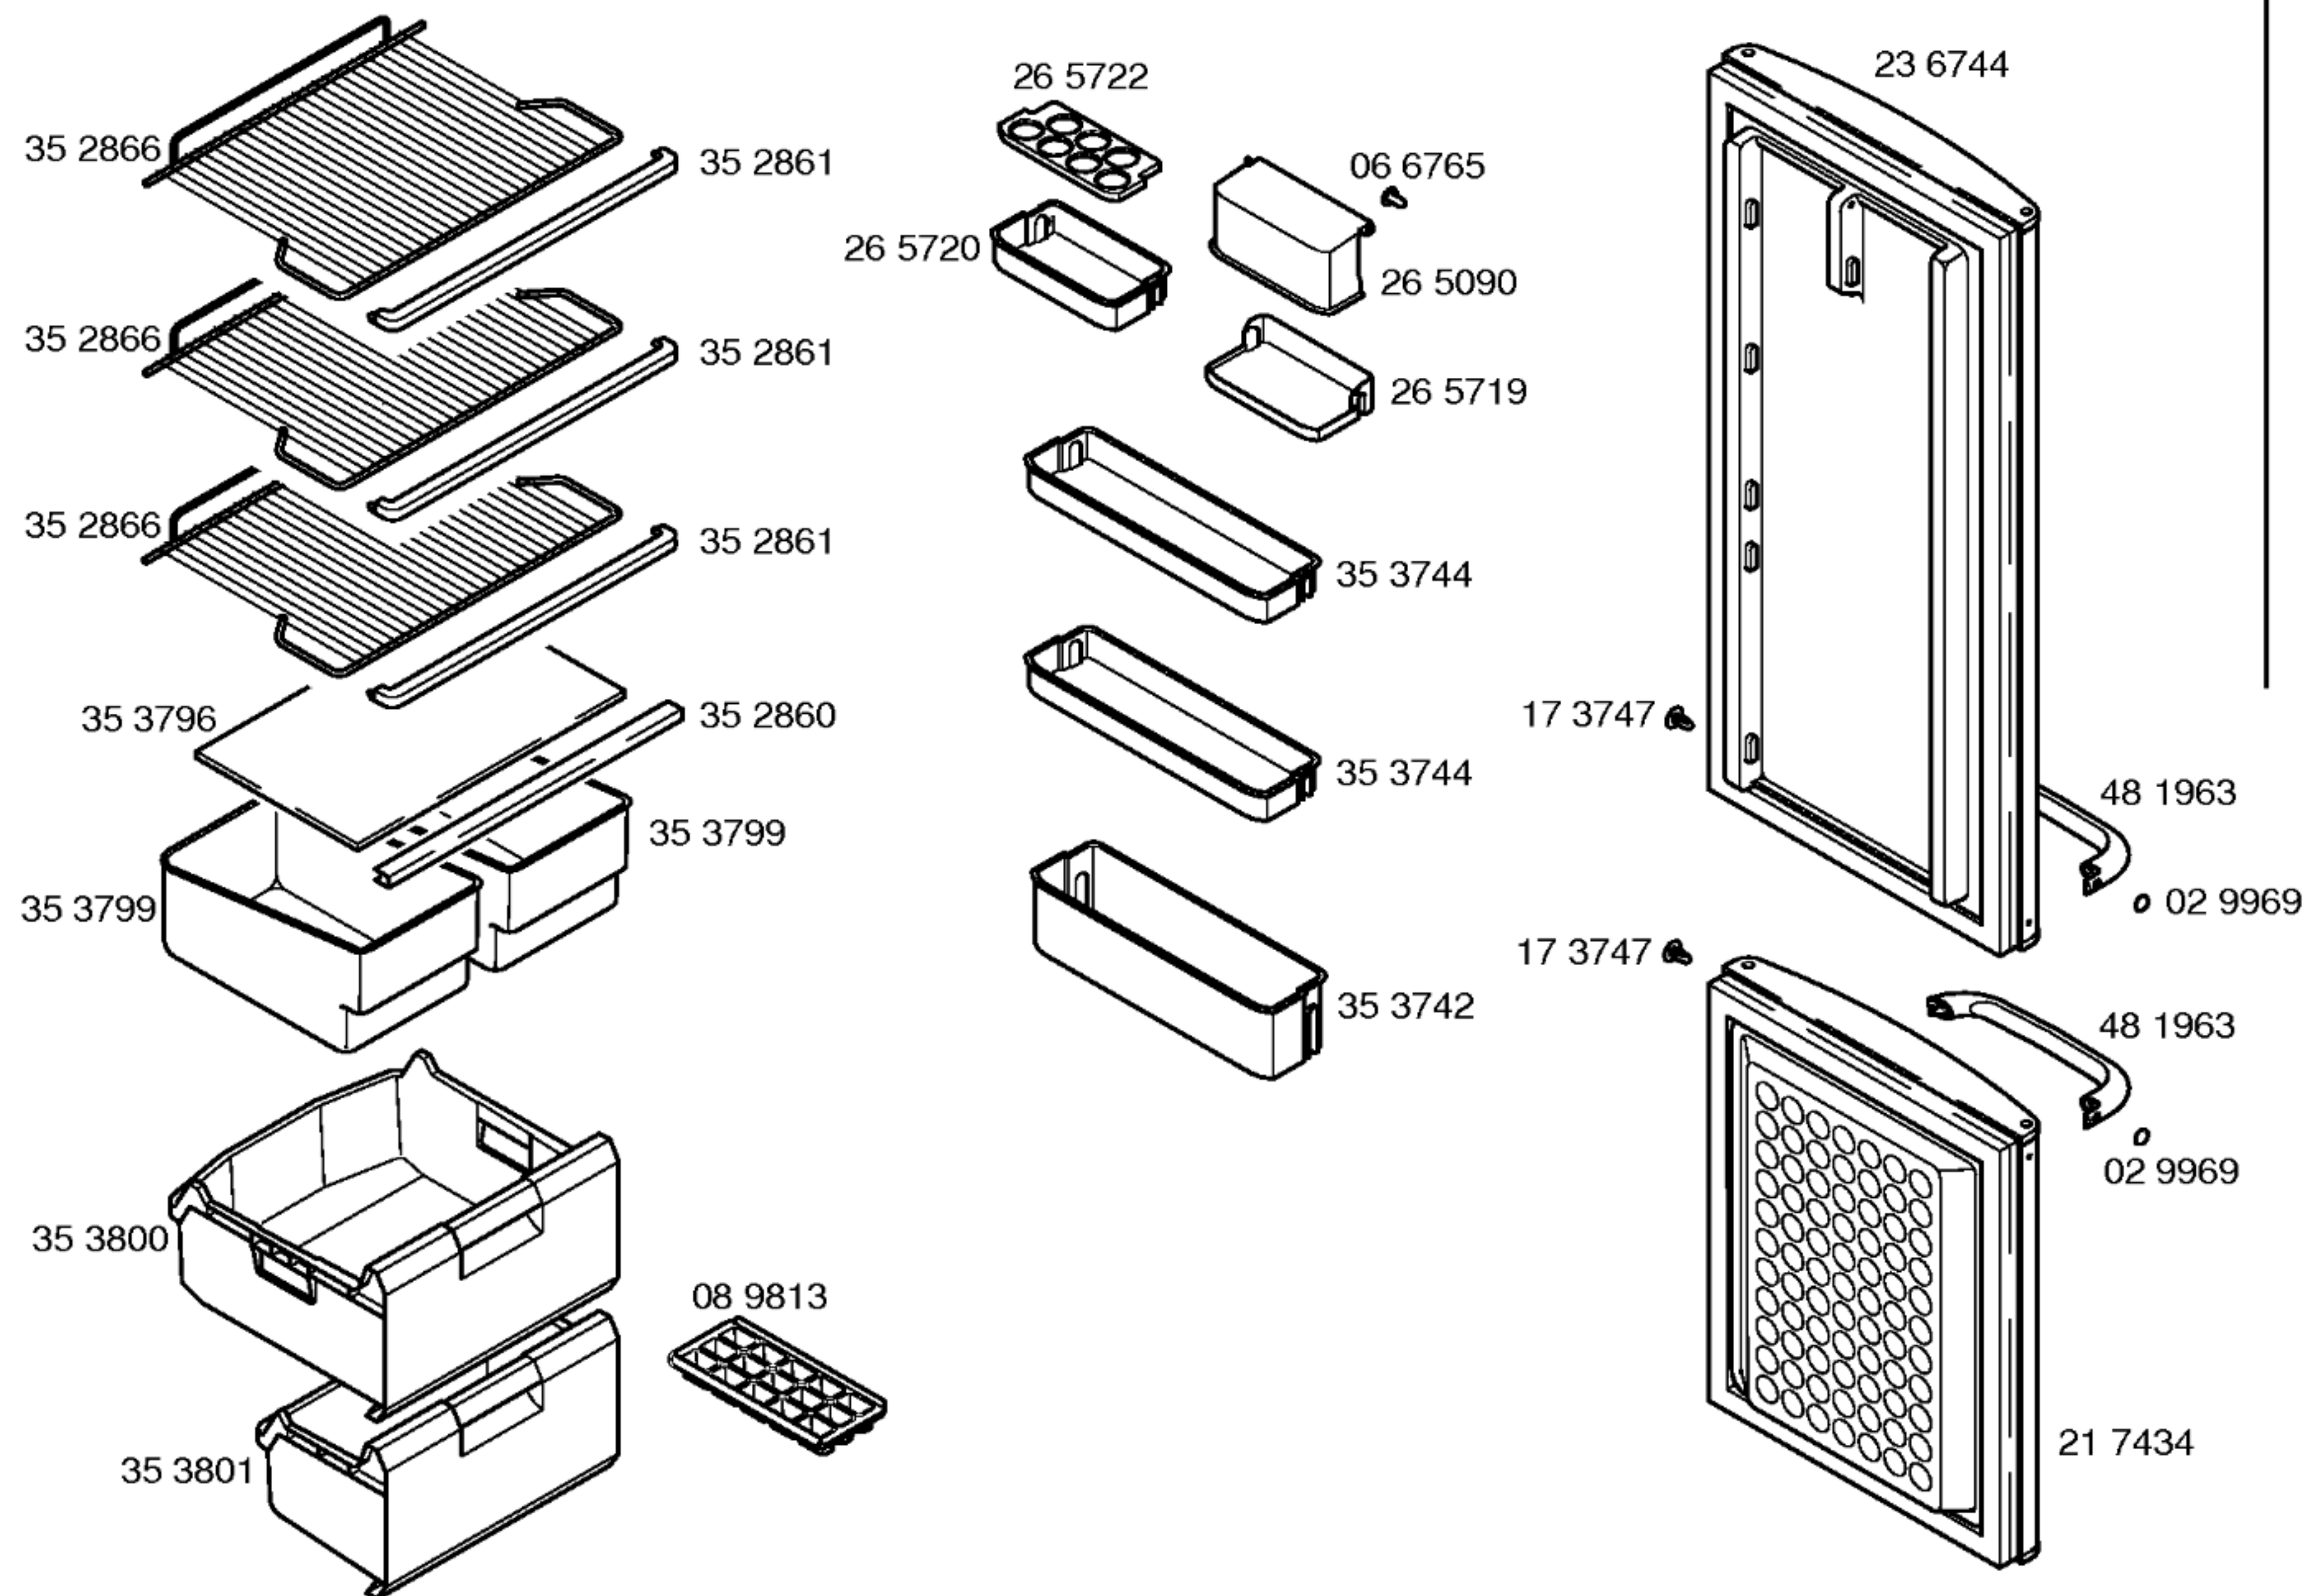

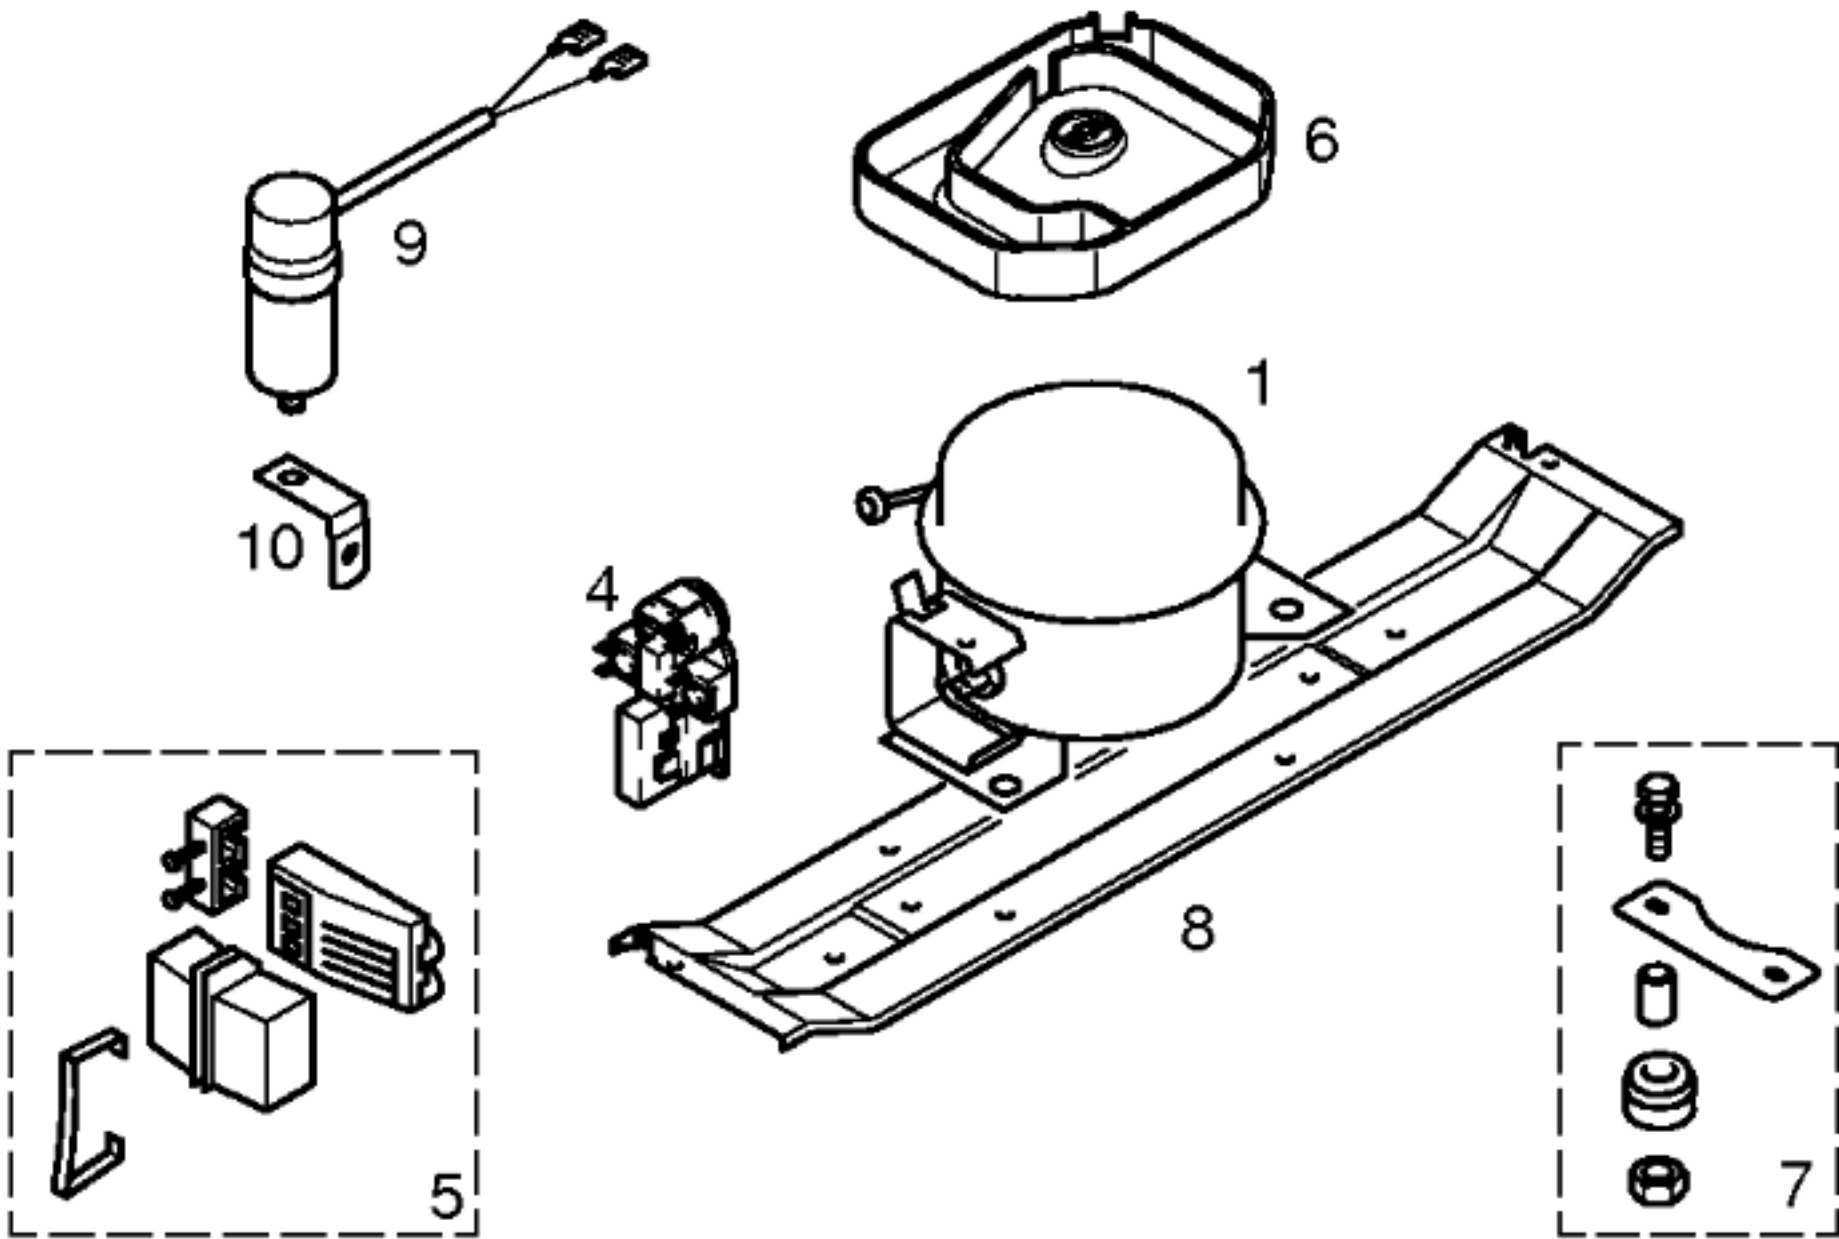

Pos.	Matsushita			
	DA110E			
1	14 2002			
2				
3				
4	06 6875			
5				
6	48 1077			
7	05 0166			
8	28 9409			
9				
10				
11				
12				

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES / DATOS TECNICOS				
Verdichter/Compressor/Compresseur/Compresor	Matsushita			
Typ/Type/Tipo	DA110E			
Förderleistung/Delivery/Debit/Aspiración l/h				
Anlaufstromm/Starting current/Cour.démarrage/Int.arranq. A	8,70			
Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm	12,41			
Hi/aux. Ohm	29,20			
Temp.Reyler/Thermostat/Termostato	Danfoss			
Typ/Type/Tipo	077B6733			
Reglerstellung/Position/Conexión	MIN. MAX.			
Schaltwerte/Switching values/ ..ein/conex. °C	+5			
Valeurs de commutation/Desconex. ..aus"/descon. °C	-22 -34			
(..abtaven' od) ..alarm' °C				
Füllmenge/Fill. quantity/Charge/Carga R600a. g	*			
Anschlusswert/Comm. load/Puiss. Connect./Potenc. W	123			
Heizung/Heater/Chauflage/Resistenc.descong. Ohm				
Widerstand/Resistance/Resistencia W				
Leistung/Power/Puissance/Potencia				
Ventilador/Blower/Ventilateur/Ventilador				
Widerstand/Resistance/Resistencia Ohm				
Magnetventil/Magnetic valve/Electrovanne/Electrovalvula				
Widerstand/Resistance/Resistencia Ohm				
Spannung/Voltage/Tension/Tensión V				
Temp.Reyler/Thermostat/Termostato ambiente				

* Siehe Typenschild / See identification plate / Voir plaquette de caractéristiques / Ver plaqueta de características