


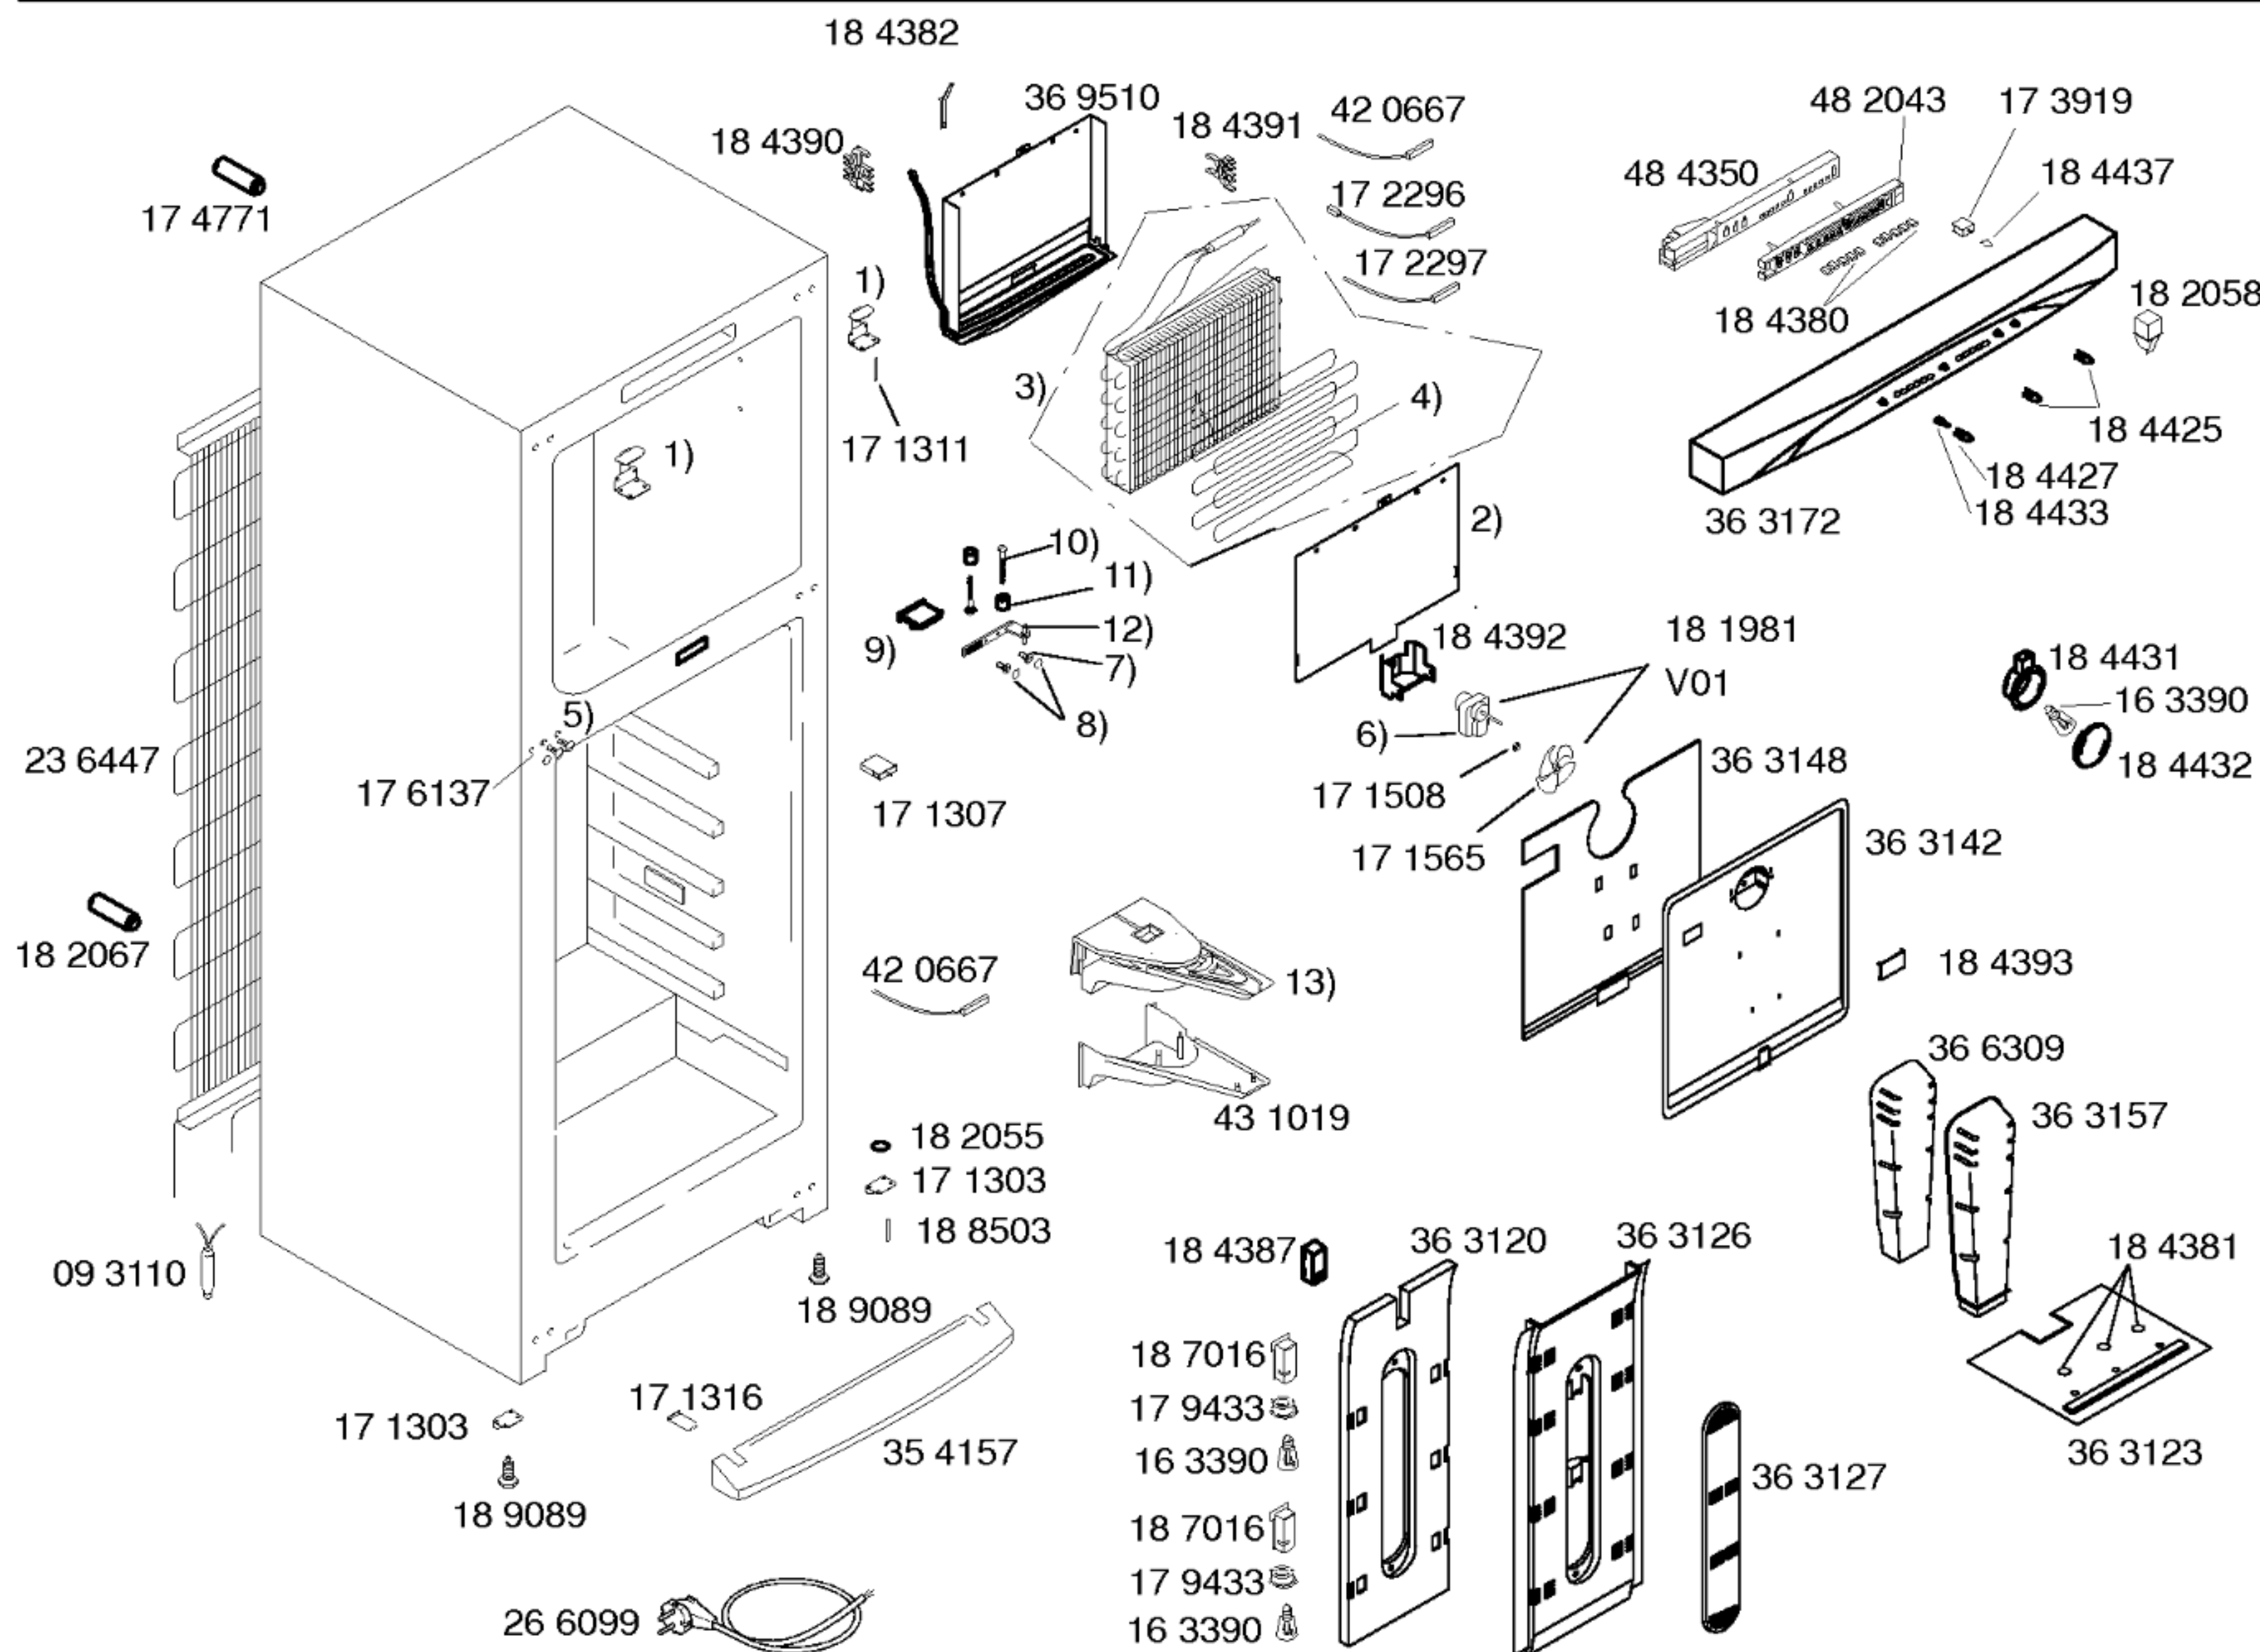

Mat. - Nr. - Konstante

3740

Gebrauchsanweisung
58 3472

1) 17 1312

2) 36 6904

3) 36 9818

4) 36 9821

5) 16 5552

6) 48 8433

7) 18 8196

8) 17 6137

9) 18 8197

10) 18 8194

11) 18 8188


12) 18 8191

13) 74 1547

V01,V02,V03,V04


43 2091

V05,V06,V07,V08

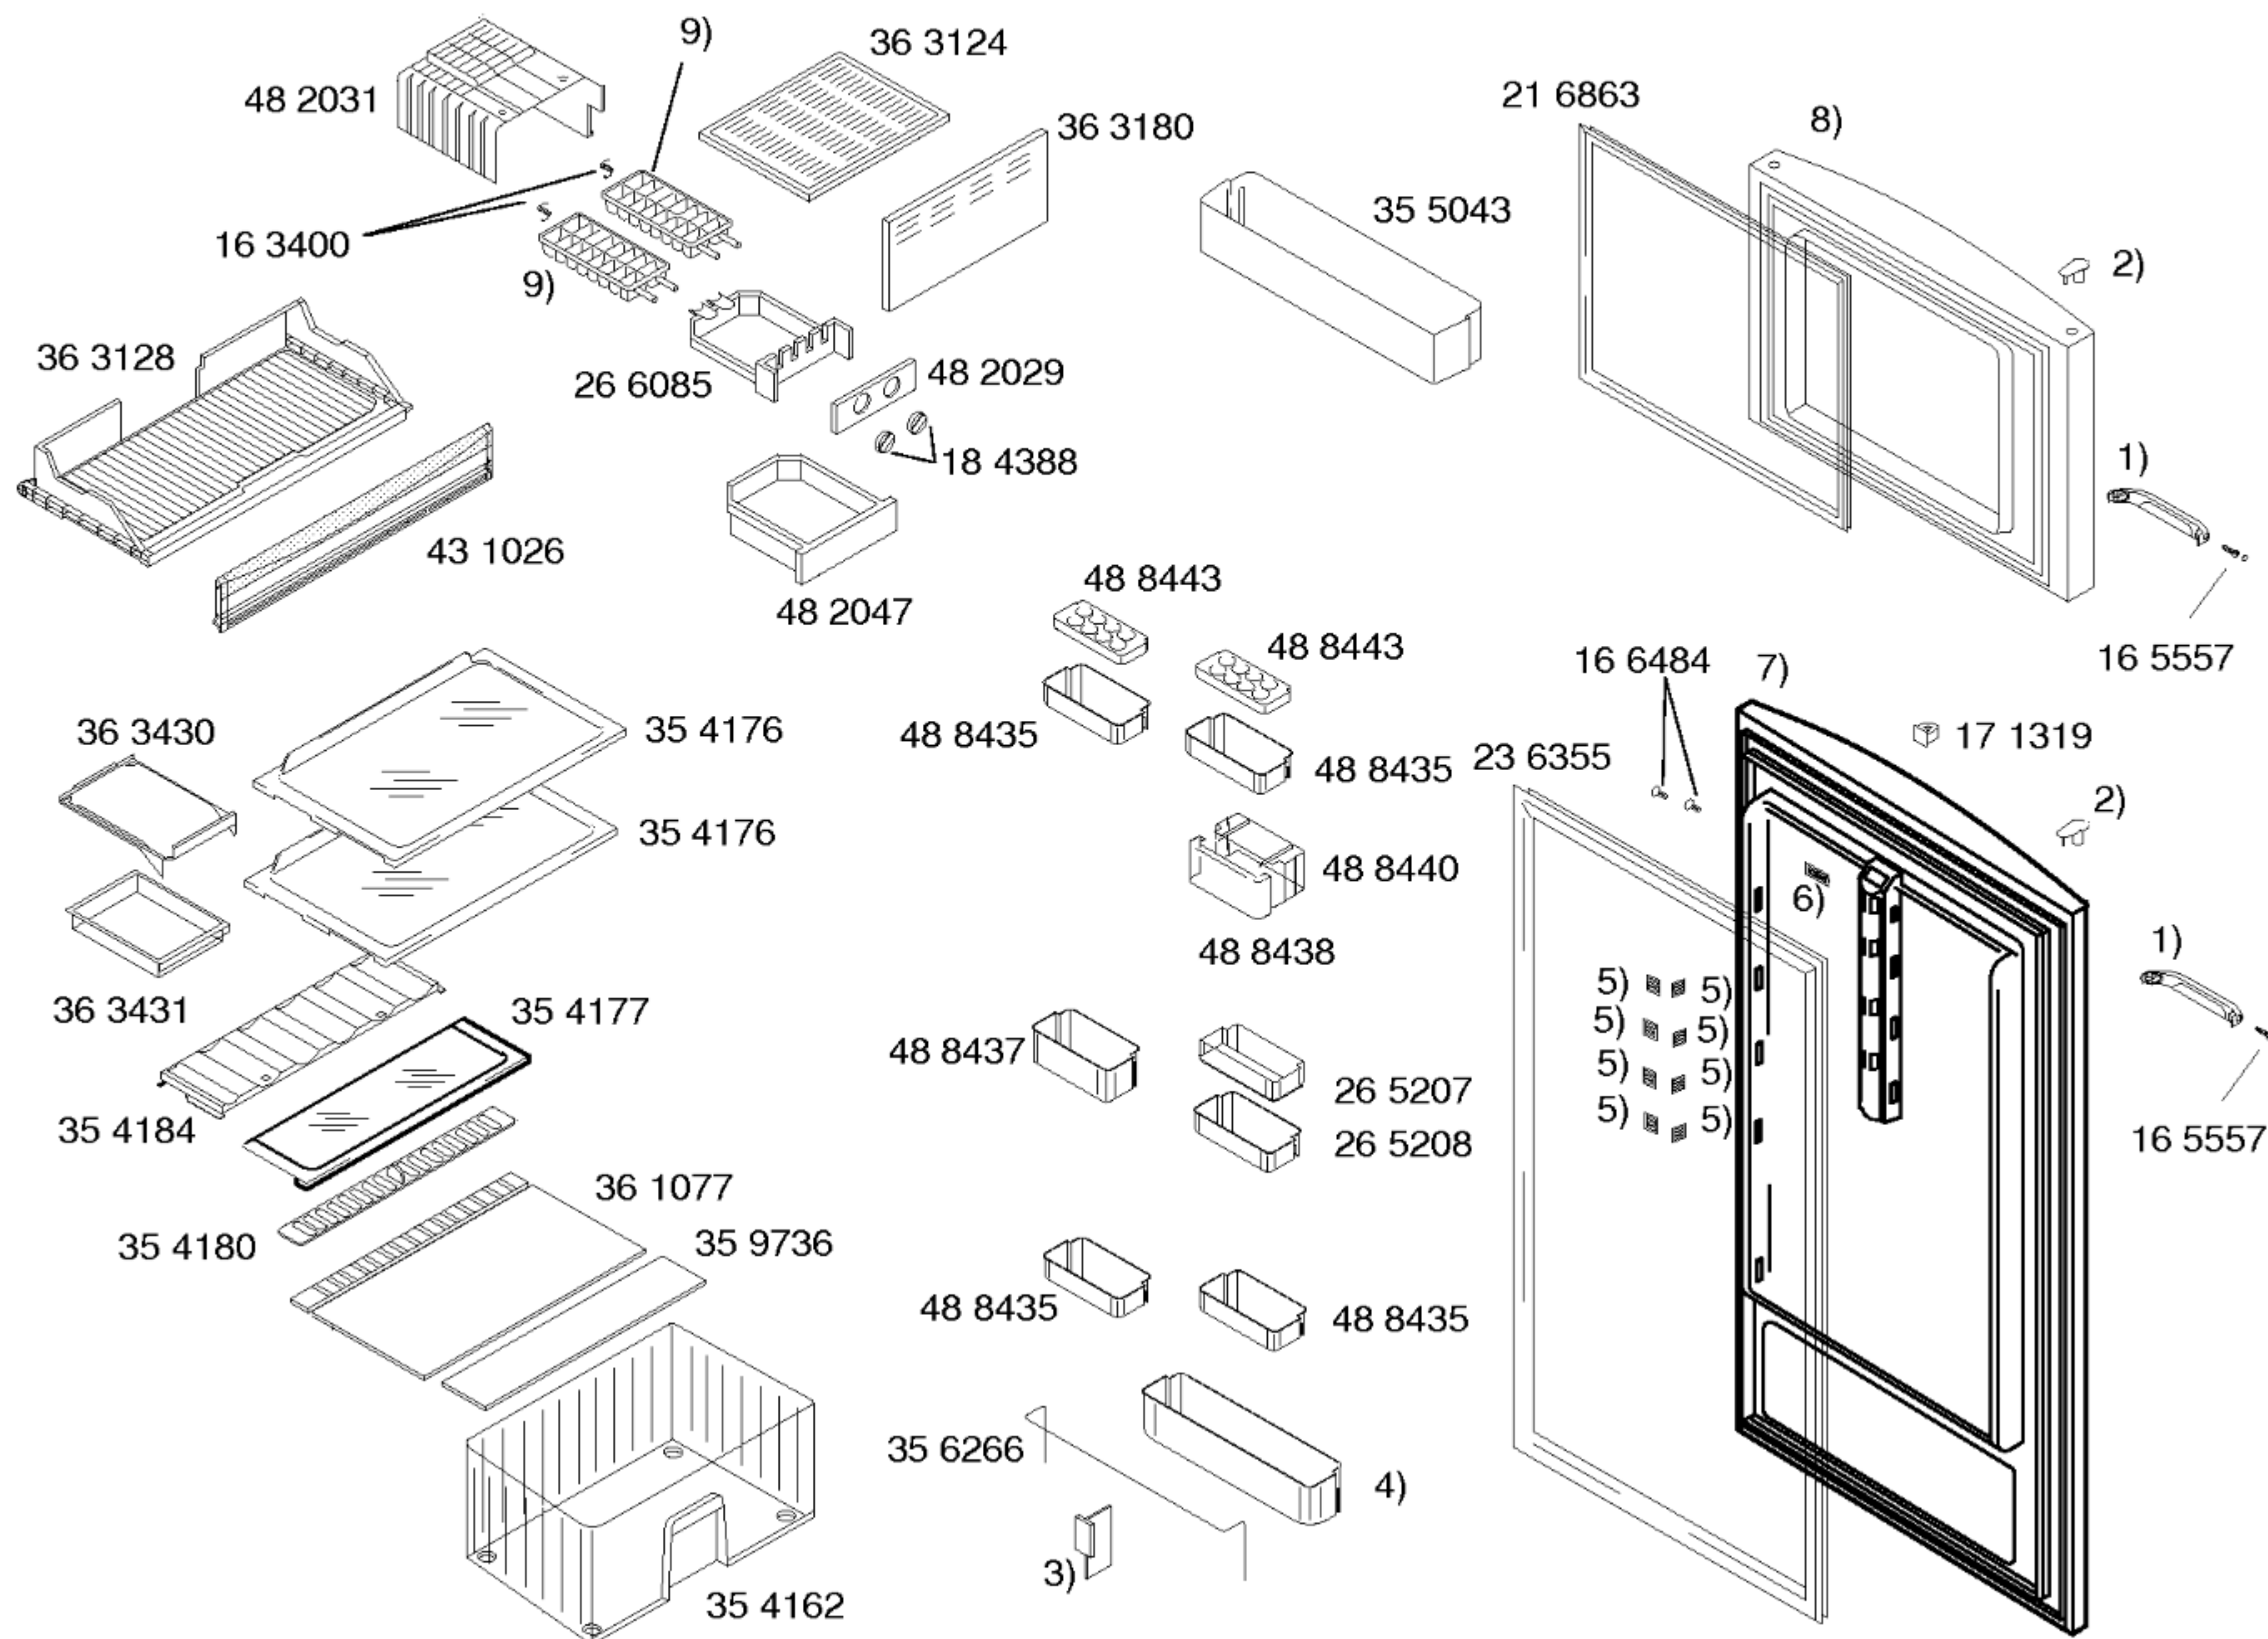

Mat. - Nr. - Konstante
3740

- 1) 26 5975
V01,V02,V03
48 8916
V04,V05,V06,V07
- 2) 17 1321
- 3) 17 3581
- 4) 35 6265
- 5) 41 6843
- 6) 41 6844
- 7) 23 9206
V01,V02,V03
23 9561
V04,V05,V06,V07
V08
- 8) 21 9646
V01,V02,V03
47 0020
V04,V05,V06,V07
V08
- 9) 26 9013
V01,V02,V03,V04
V05,V06
48 9738
V07,V08

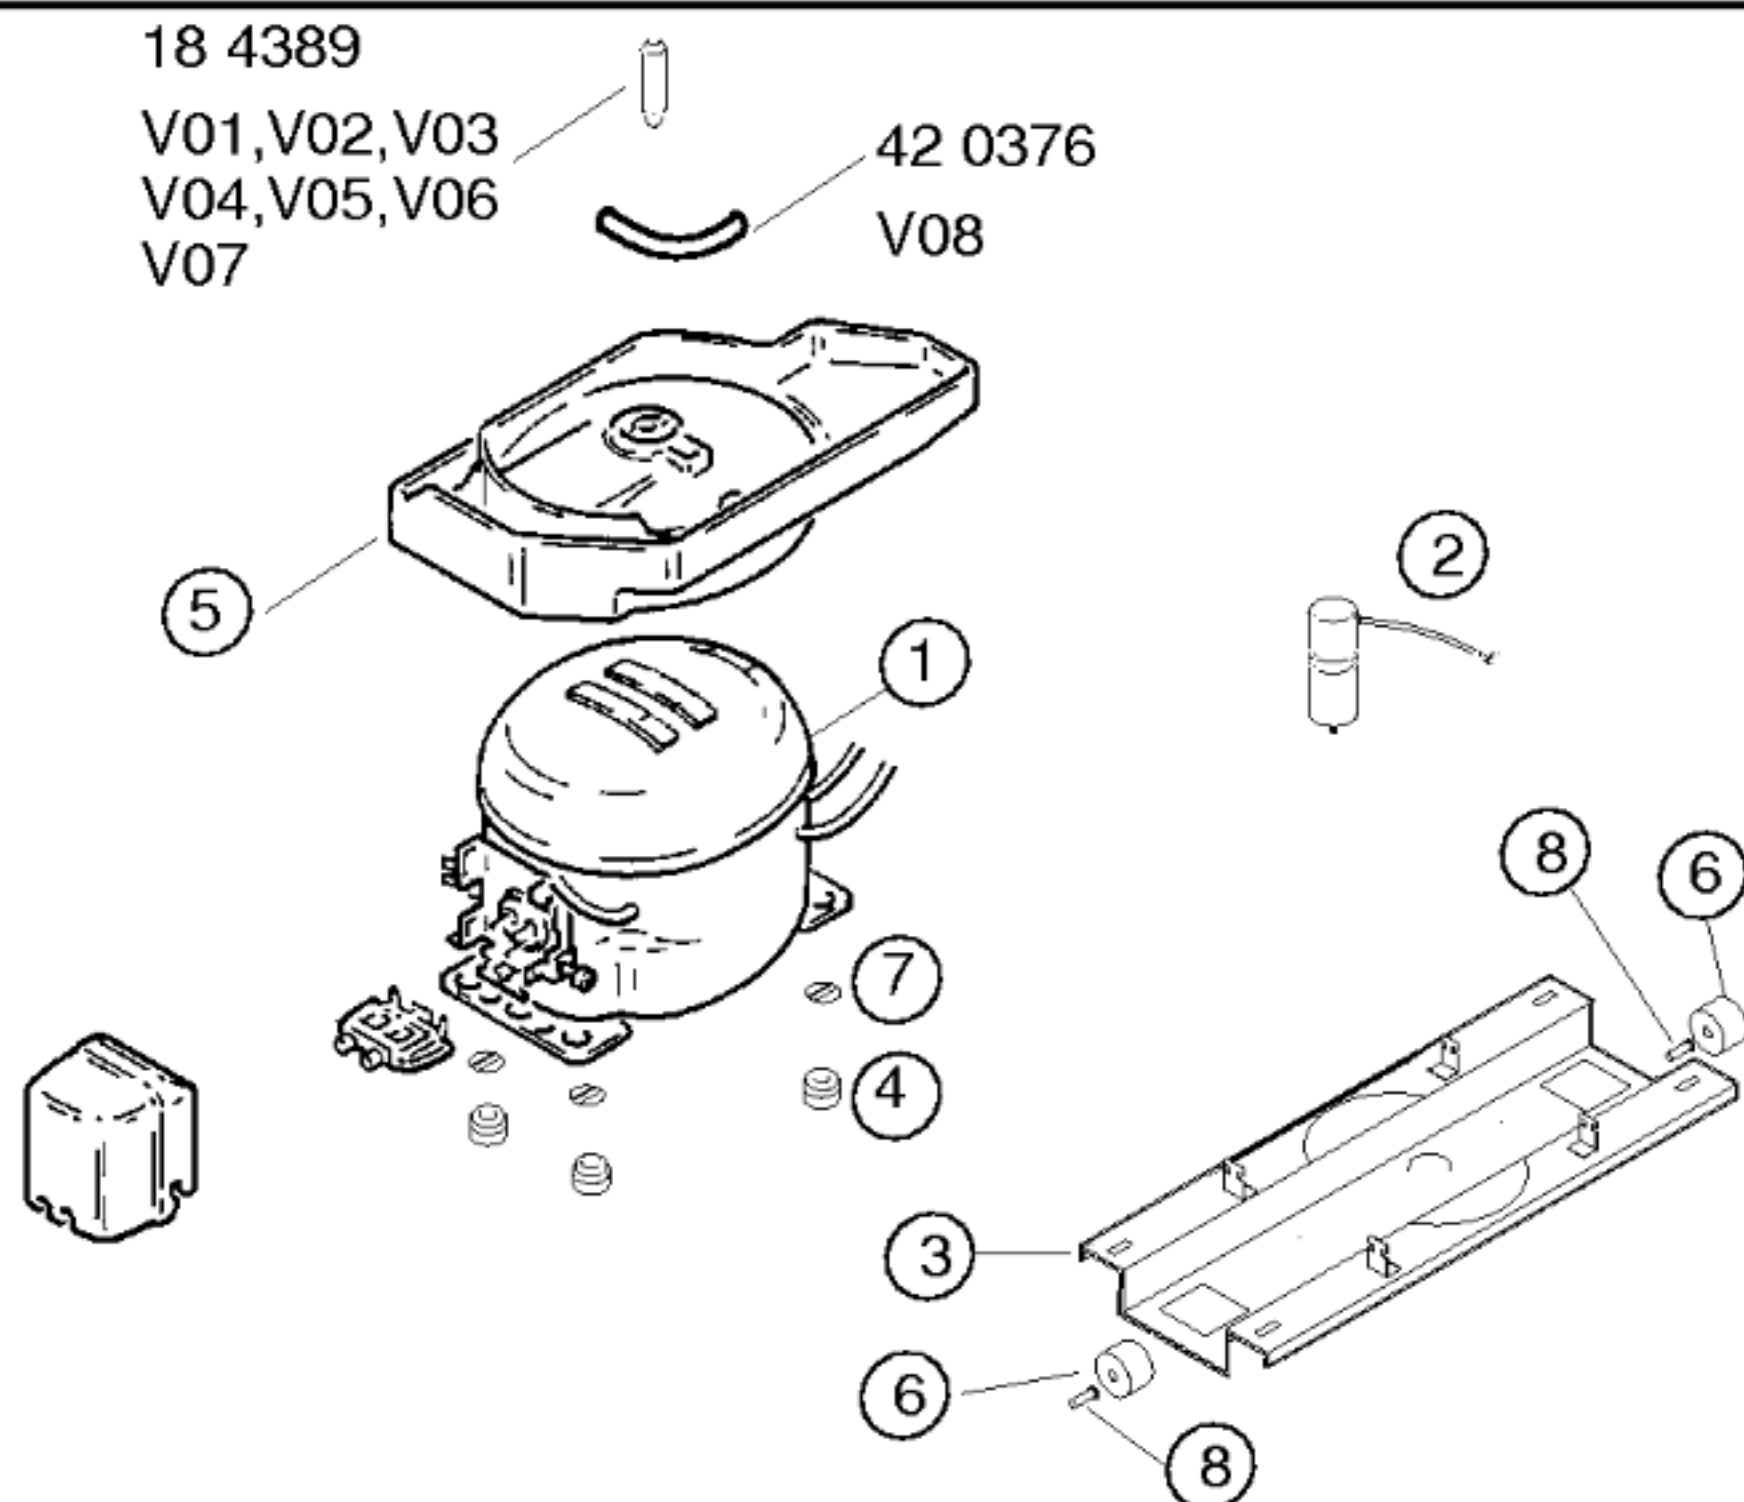

Pos.	V01..V07	V08	
	Aspera	Aspera	
	T1116Y	NBT1116Y	
1	14 2193	14 2193	
2	17 4093		
3	35 4158		
4	16 3427		
5	36 3166	36 3166	
6	17 1318		
7	17 1519		
8	18 1014		
9			
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNİK BİLGİLER			
Verdichter/Compressor/Kompresör Typ/Type/Tip Förderleistung/Delivery/Verim/h Anlaufstrom/Starting current/Giris akimi Widerstand/Resistance/Rezistans Ha/ Hi/aux.	MATS. DA110E 7	Aspera NBT1116Y	
Temp.Reyler/Thermostat/Termostat Typ/Type/Tip Reglerstellung/Position/Termostat pozisyonu Schaltwerte/Acma kapama degerleri Valeurs de commutation/Termostat degeri (..abtaven' od)	Danfoss D77B62 +4.5 +4.5 -28 -18		
Füllmenge/Fill. quantity/ Dolum miktarı	R600a	g	*
Anschlusswert/Comm. load/Giris gucu	W	160	*
Heizung/Heater/Rezistans Widerstand/Resistance/Direnc Leistung/Power/Guc (Min Annehmbare Werte in 220V)	W	160	48
Verdampfer	Verdampfer	Ablaufrinne	Klappe 4
Ventilador/Blower/Vantilatör Widerstand/Resistance/Rezistans	Verdampfer		
Magnetventil/Magnetic valve/Manyetik valf Widerstand/Resistance/Rezistans Spannung/Voltage/Gerilim	V		
Temp.Reyler/Thermostat/Termostat			

* Siehe Typenschild/Mamul etiketine bakınız