


Mat. – Nr. – Konstante
3740









Gebrauchsanweisung
58 8115


1) 16 5552

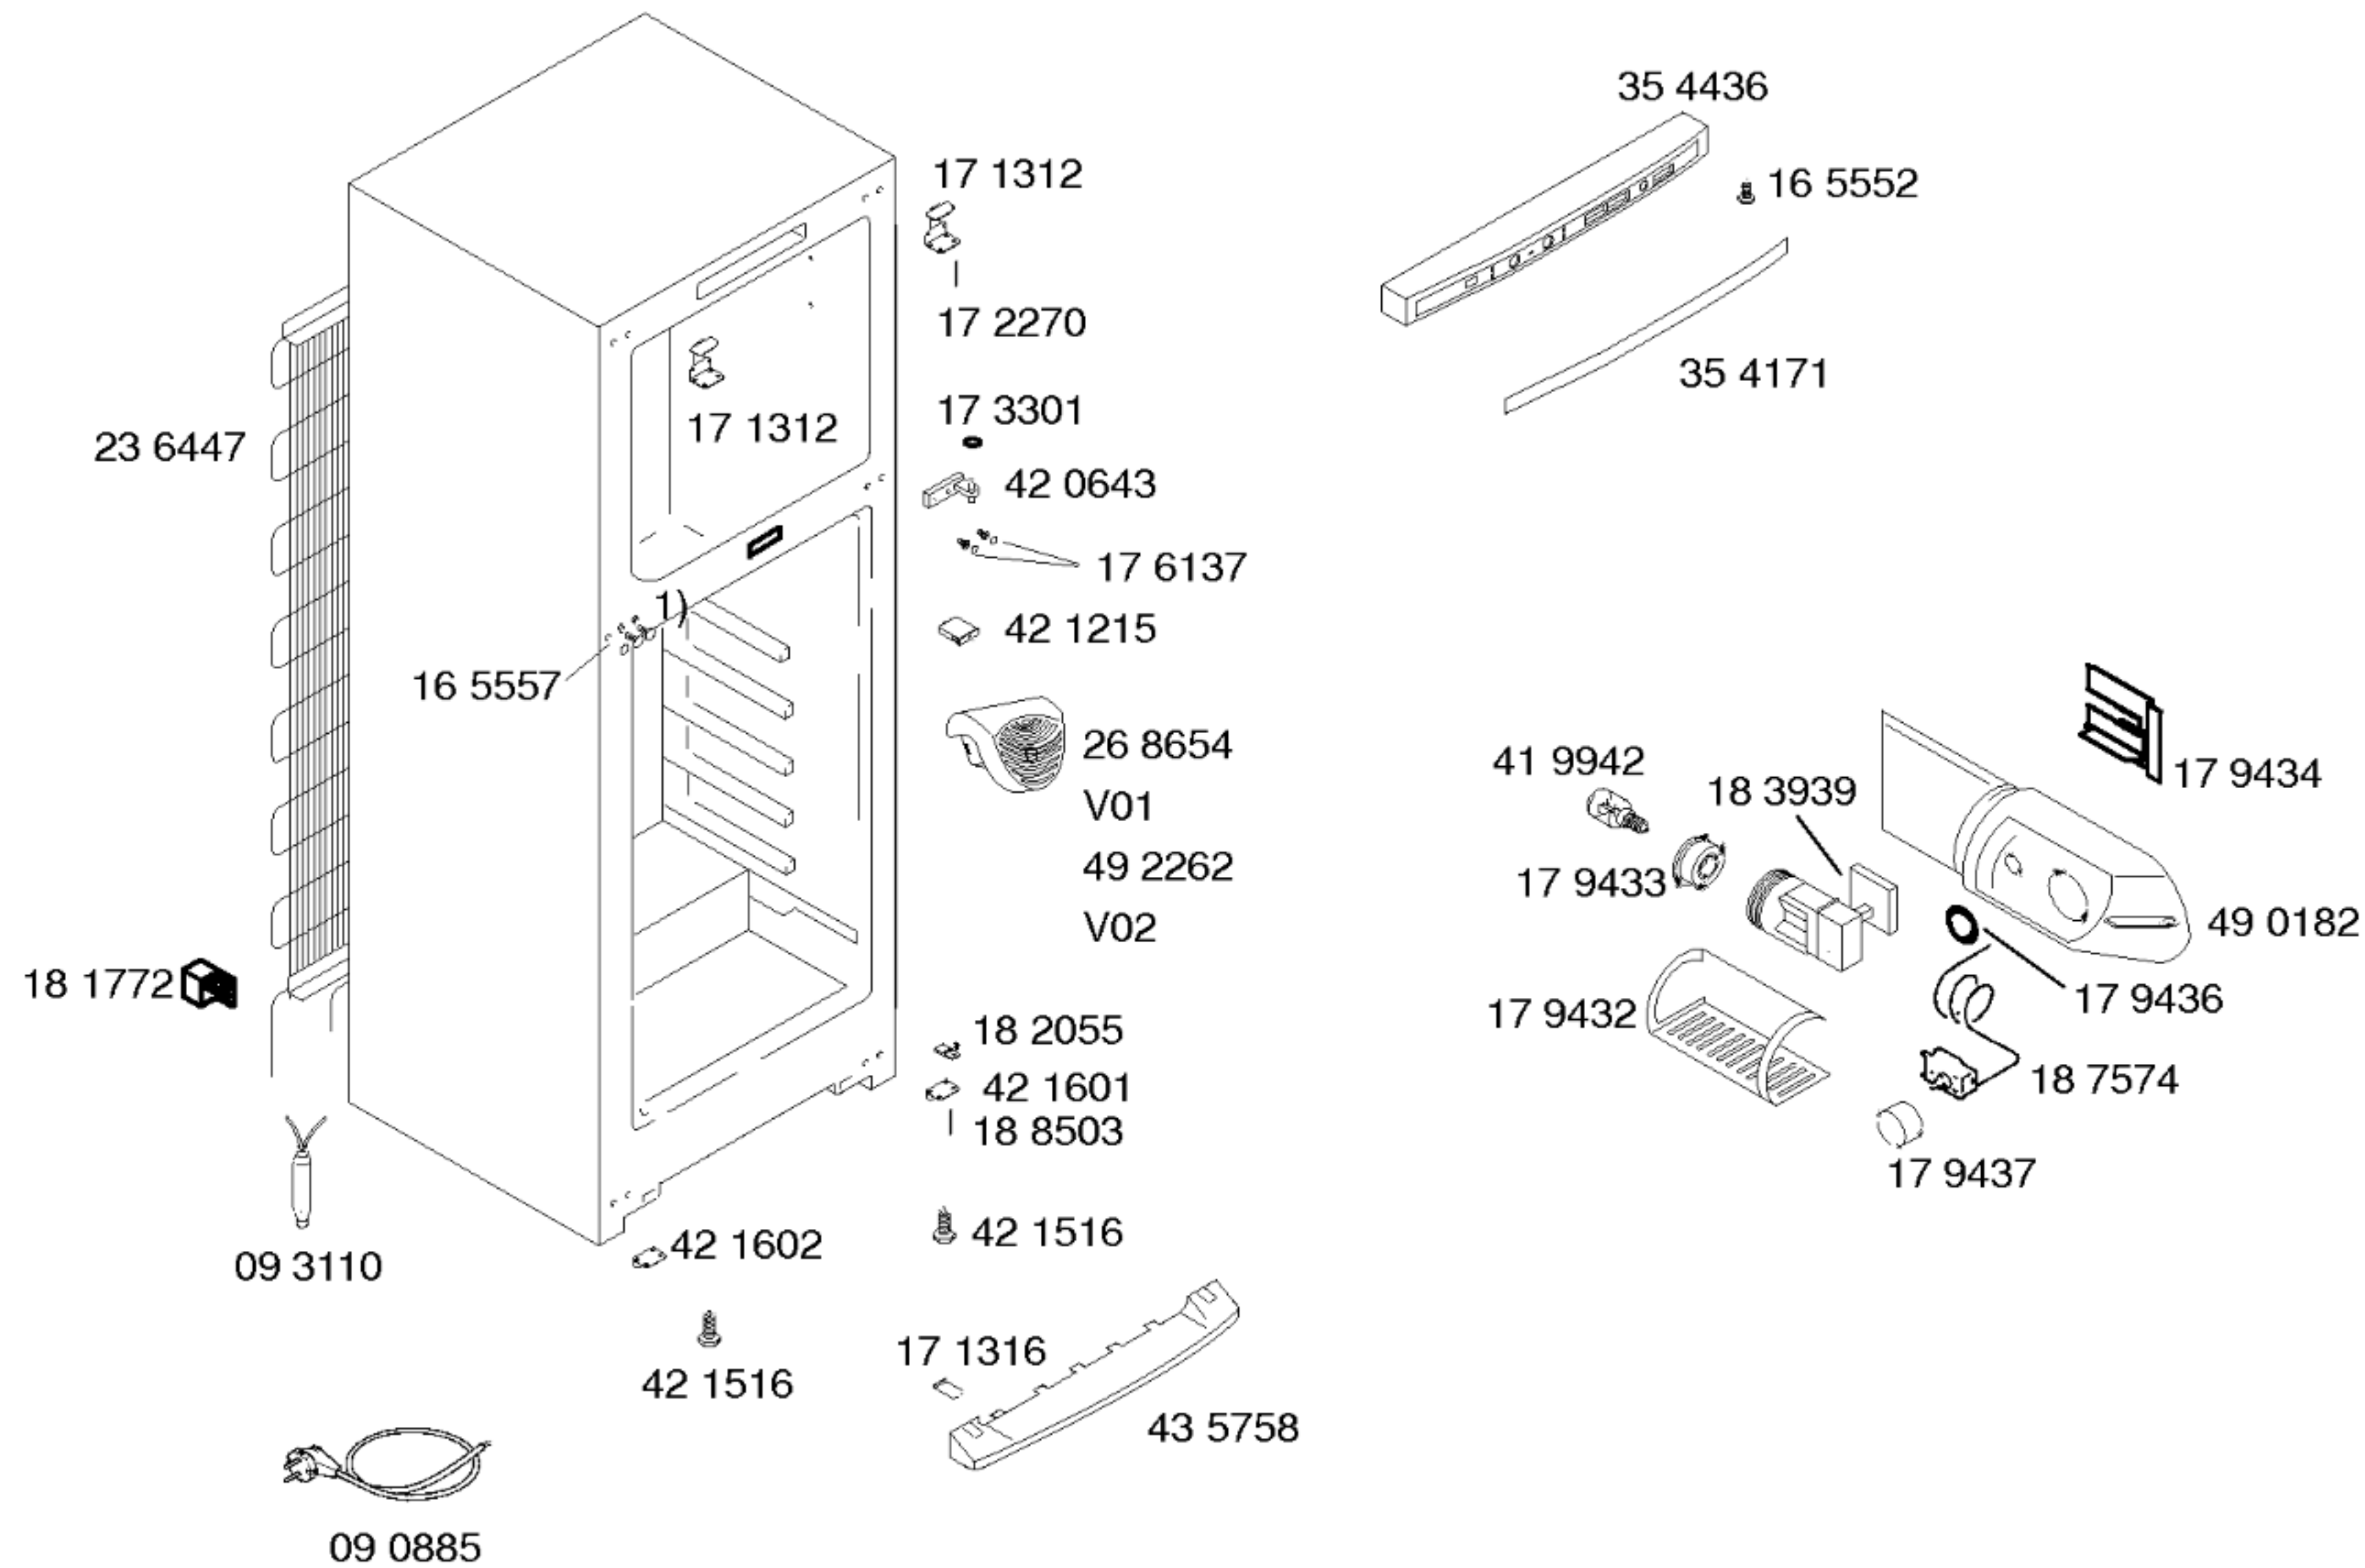

Mat. - Nr. - Konstante
3740

- 1) 43 4586
- 2)
- 3) 41 7890

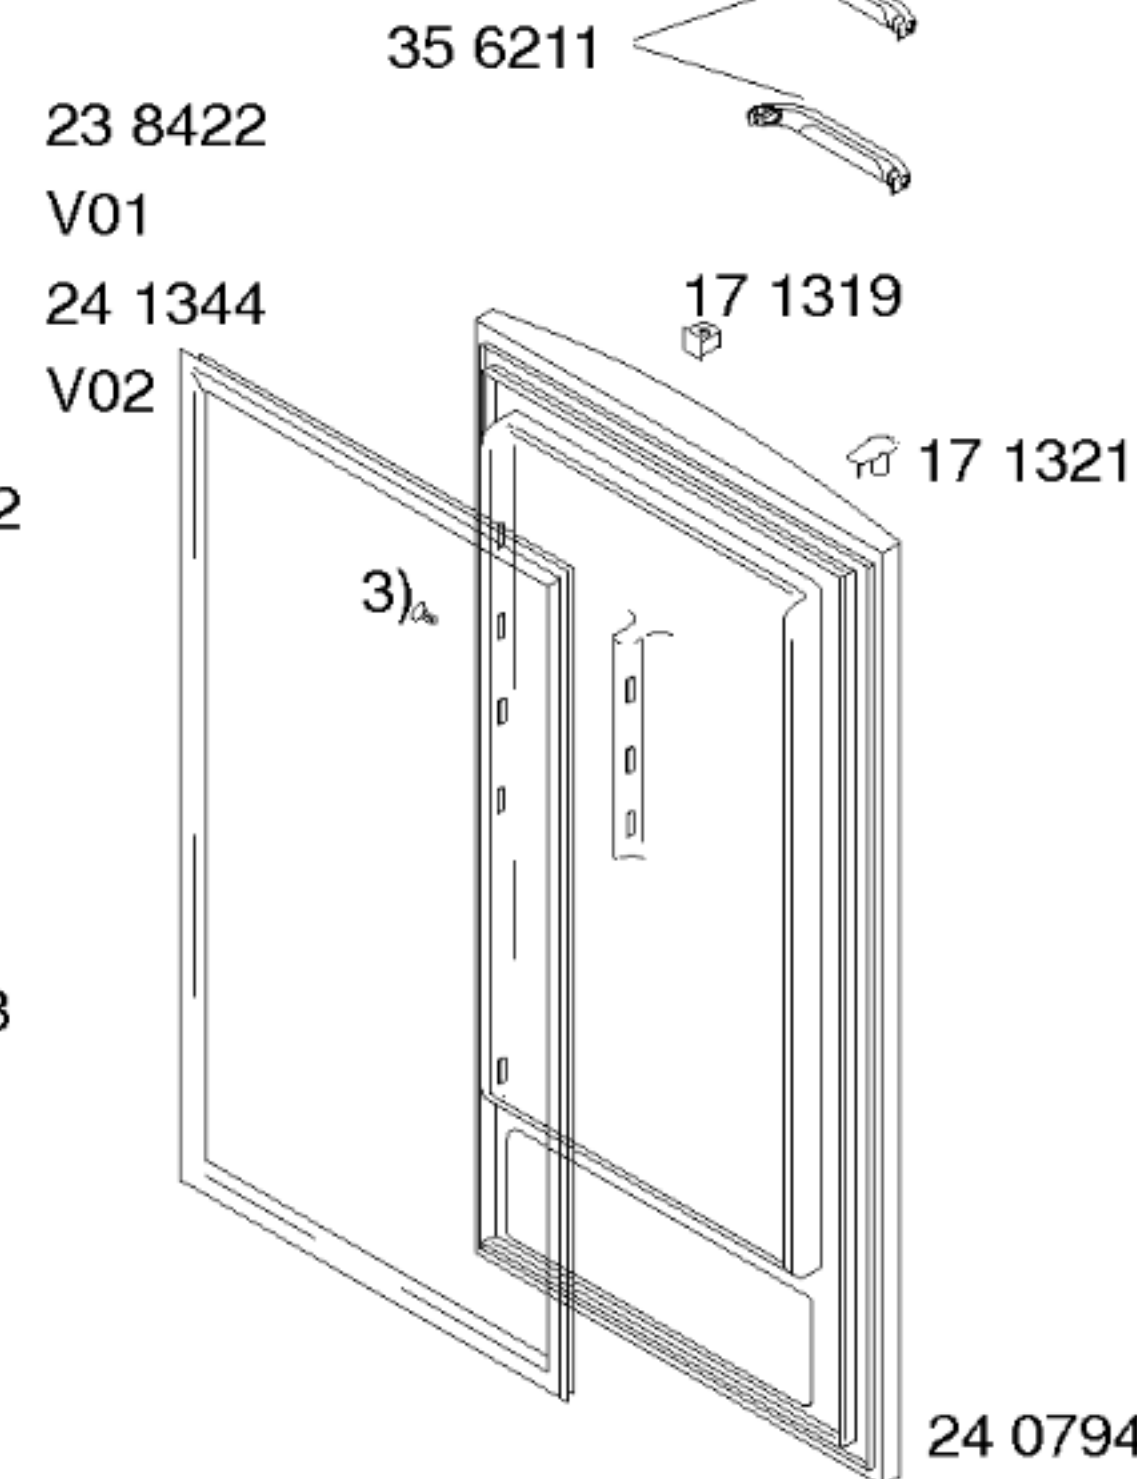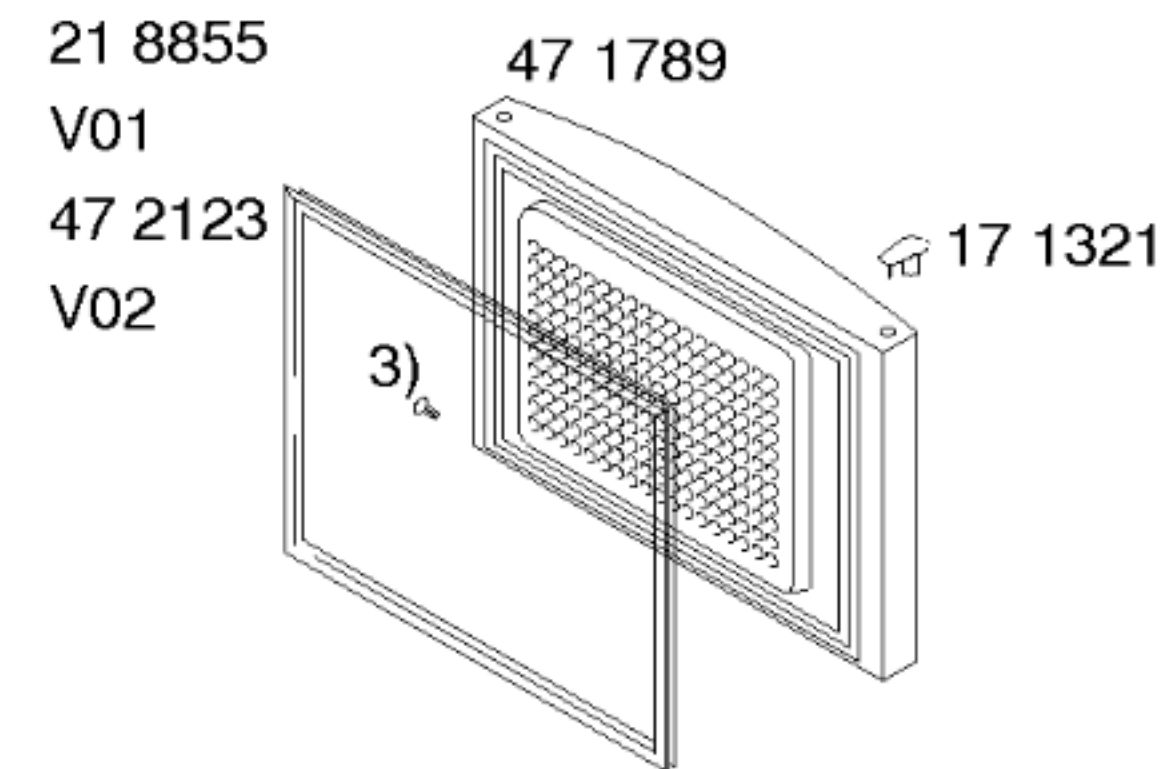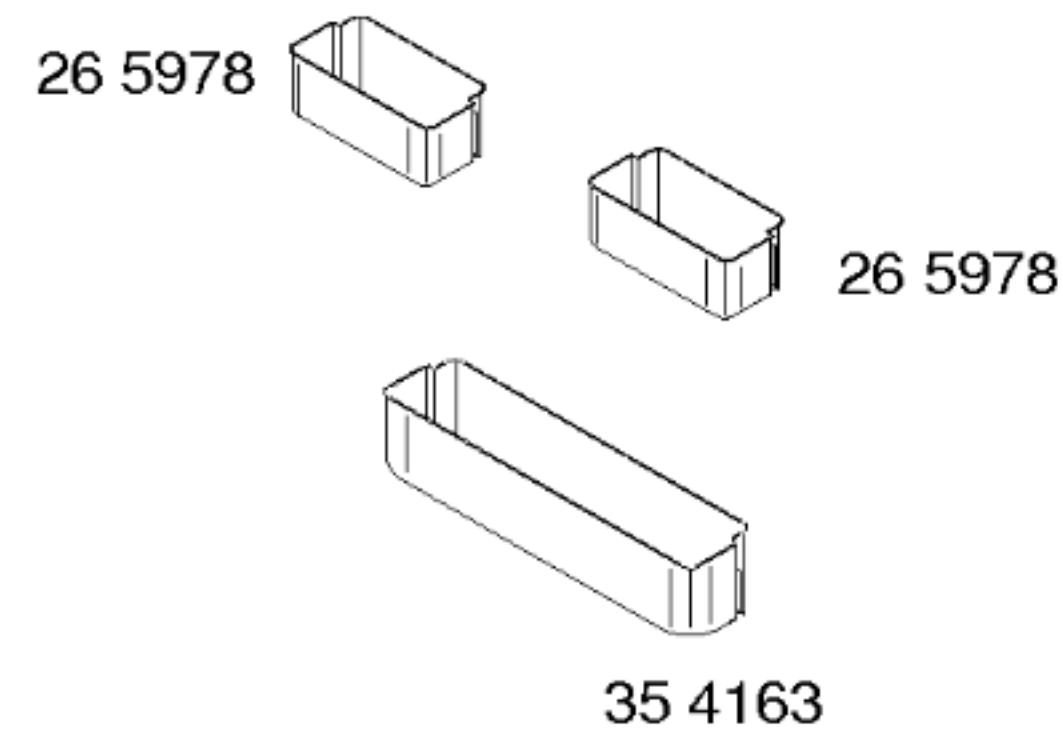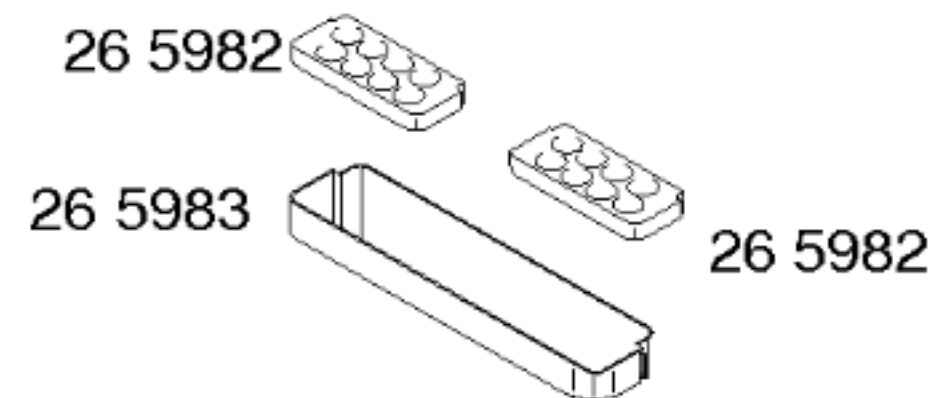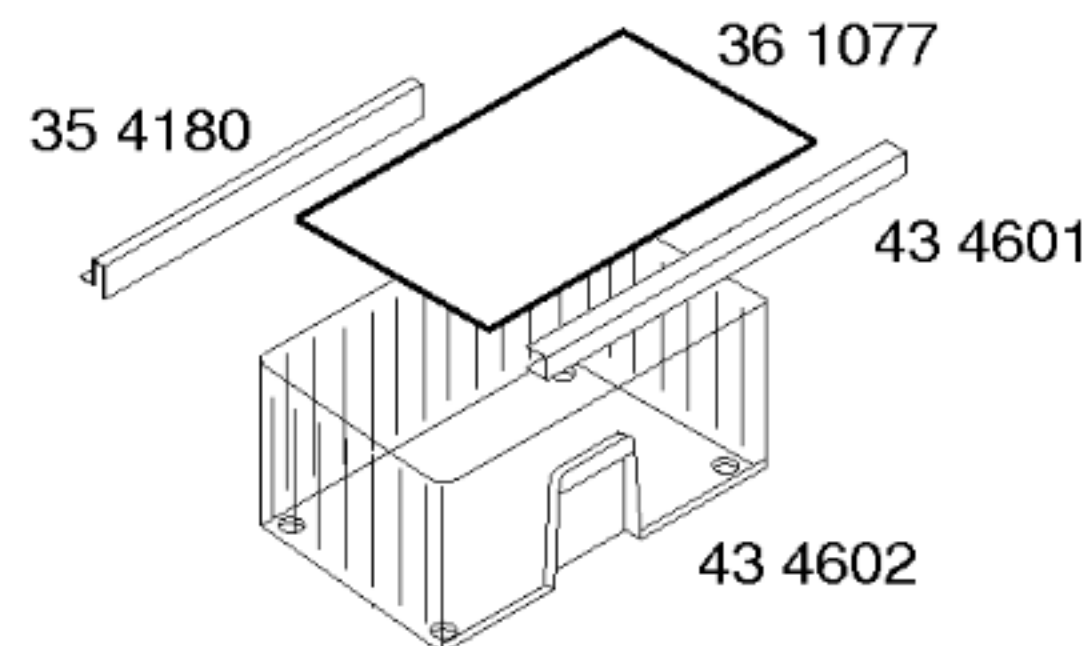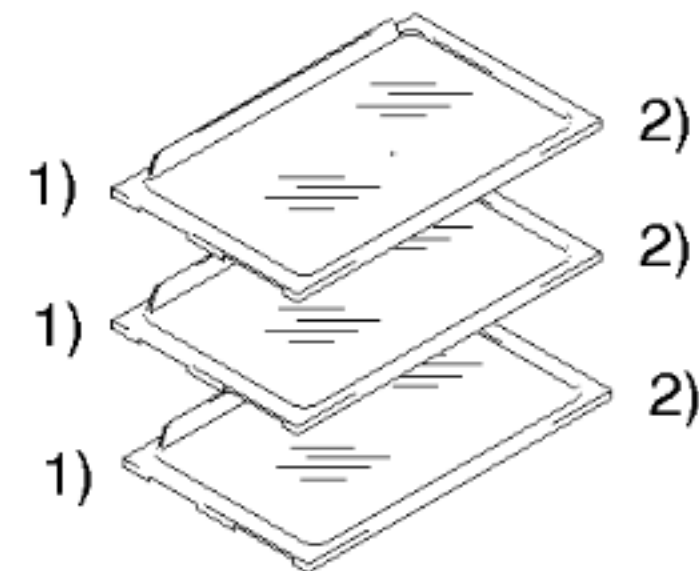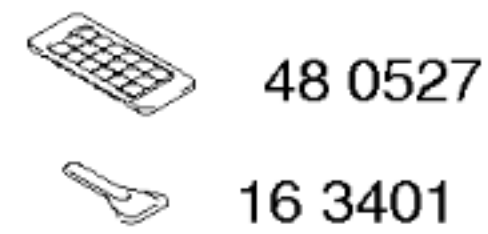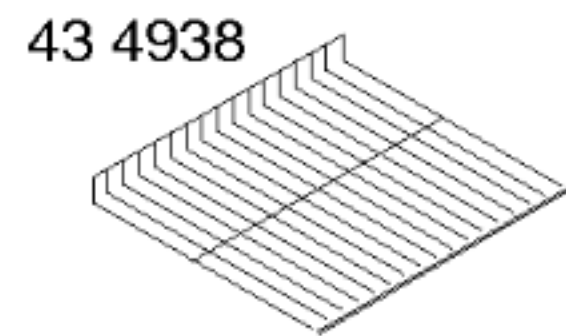

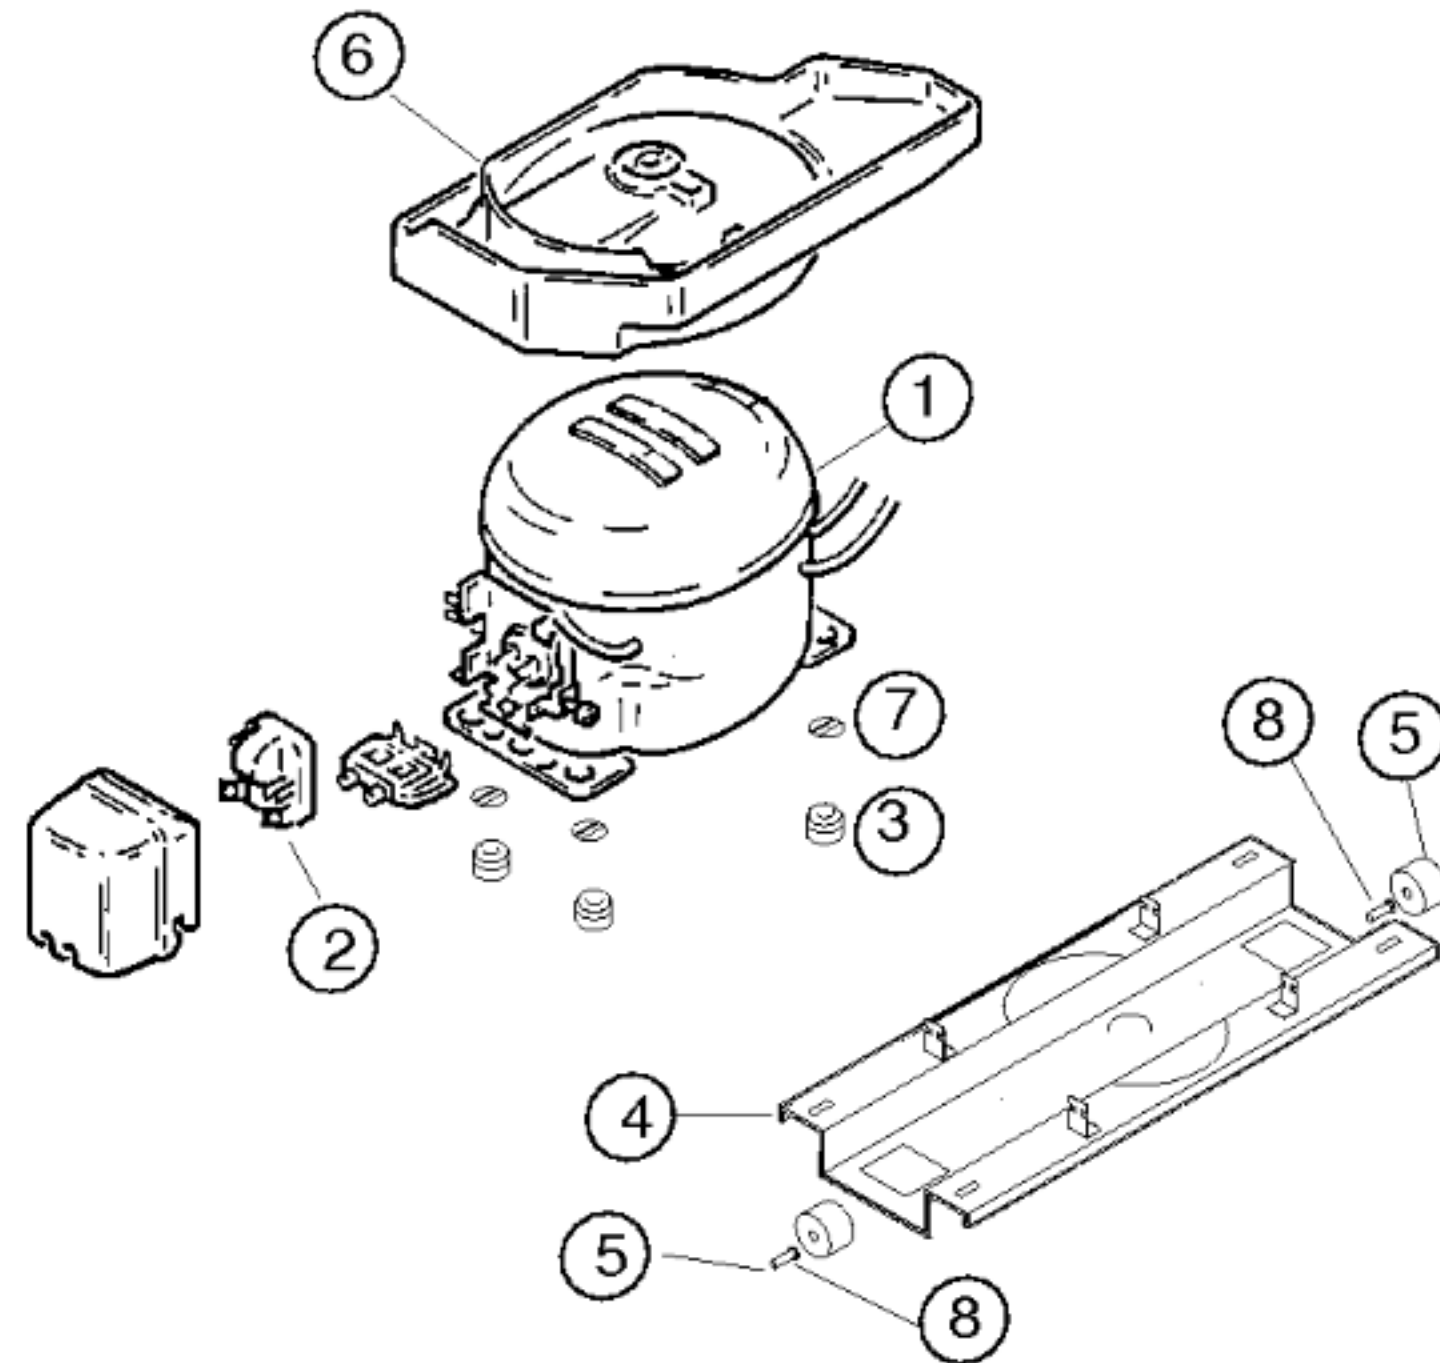Mat. – Nr. – Konstante
3740

Pos.	Matsushita		
	DA125E		
1	14 2199		
2	18 7960		
3	16 3427		
4	35 4158		
5	17 1318		
6	49 1245		
7	17 1519		
8	18 1014		
9			
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER			
Verdichter/Compressor/Kompresör	Matsushita		
Typ/Type/Tip	DA125E		
Förderleistung/Delivery/Verim/h			
Anlaufstrom/Starting current/Giris akimi	A	0.63	
Widerstand/Resistance/Rezistans Ha/	Ohm	12.41	
Hi/aux.		29.2	
Temp.Reyler/Thermostat/Termostat			
Typ/Type/Tip			
Reglerstellung/Position/Termostat pozisyonu	..ein/acma °C	4.5 +4.5	
Schaltwerte/Acma kapama degerleri	..aus"/kapama	-28 -18	
Valeurs de commutation/Termostat degeri	..alarm'		
(..abtaven' od)			
Füllmenge/Fill. quantily/ Dolum miktarı	R600	g	
Anschlusswert/Comm. load/Giris gucu	W		
Heizung/Heater/Rezistans	Ohm		
Widerstand/Resistance/Direnc	W		
Leistung/Power/Guc			
Ventilador/Blower/Vantilatör	Ohm		
Widerstand/Resistance/Rezistans			
Magnetventil/Magnetic valve/Manyetik valf	Ohm		
Widerstand/Resistance/Rezistans	V		
Spannung/Voltage/Gerilim			
Temp.Reyler/Thermostat/Termostat			

* Siehe Typenschild/Mamul etiketine bakınız