

**BOSCH**


GSD2117/01-V01
GSD2117CH/01-V02
GSD2117/42-V03

GSD2117CH/42-V04

KÜHL-,GEFRIERGERÄTE
Gefrierschränke, Stand

Mat. - Nr. - Konstante
3740

Gebrauchsanweisung
51 9895
(D,GB,F,I,NL,E,P)

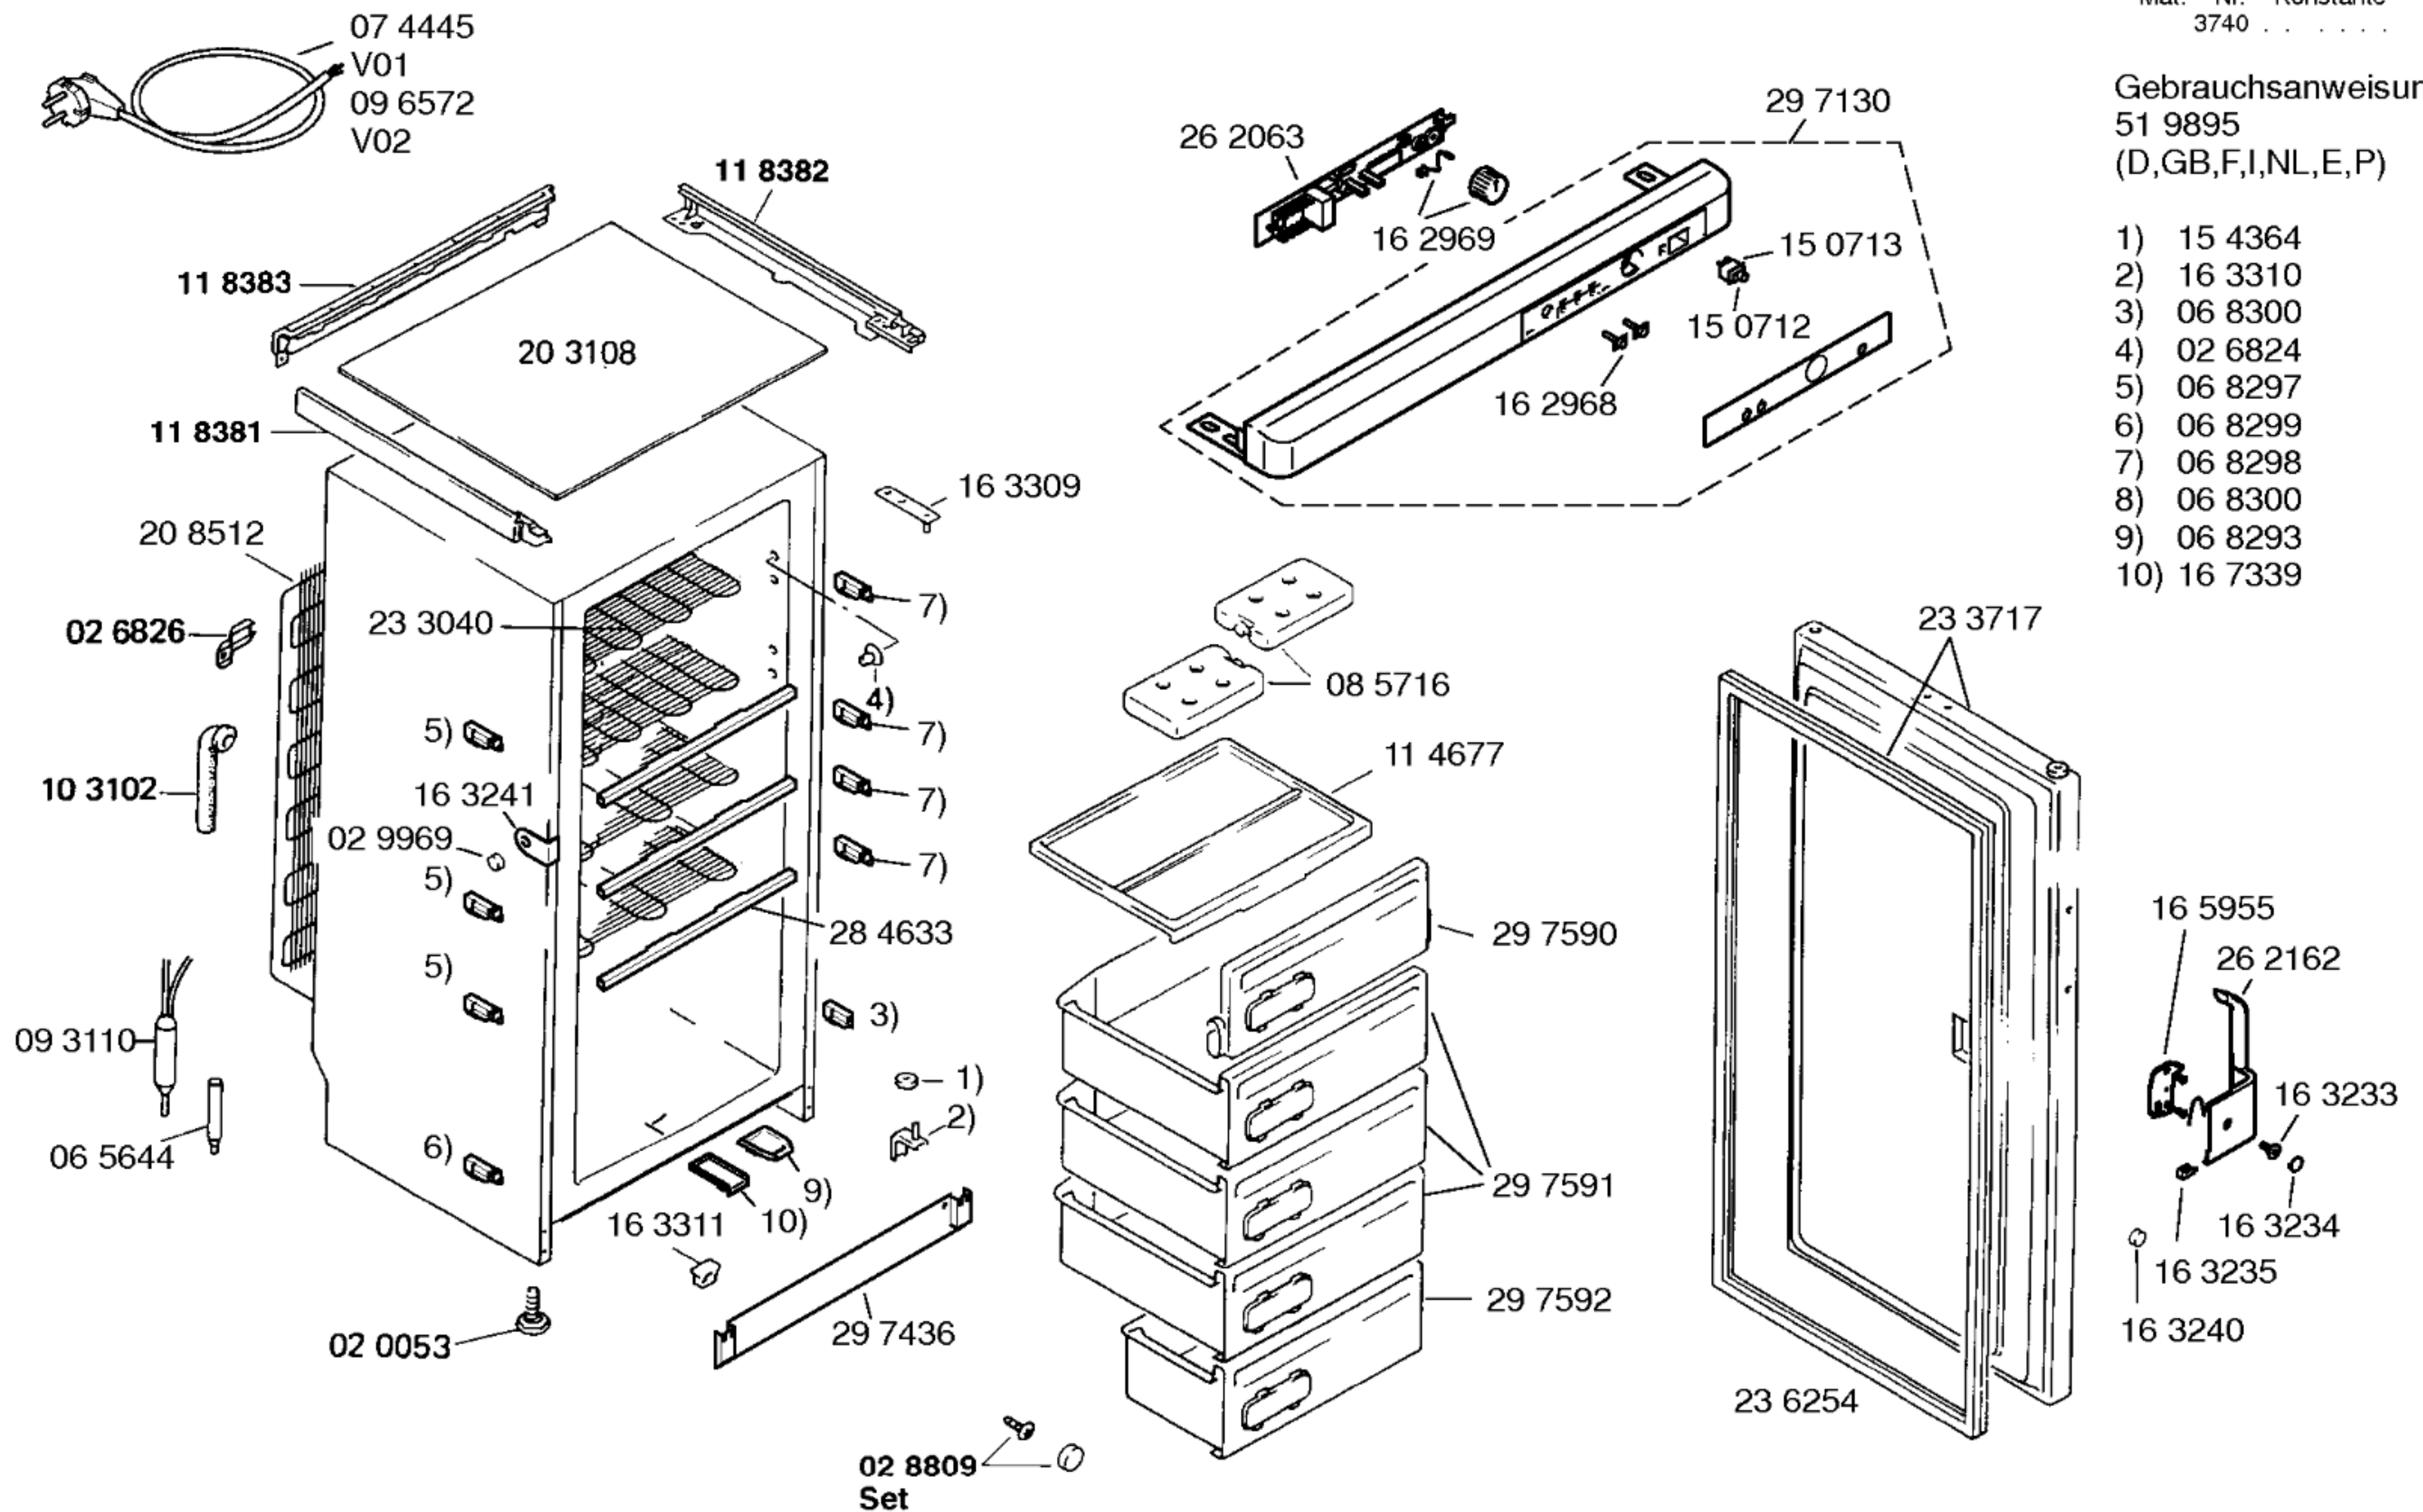


**BOSCH**

GSD2117/01-V01
GSD2117CH/01-V02
GSD2117/42-V03

GSD2117CH/42-V04

KÜHL-,GEFRIERGERÄTE
Gefrierschränke, Stand

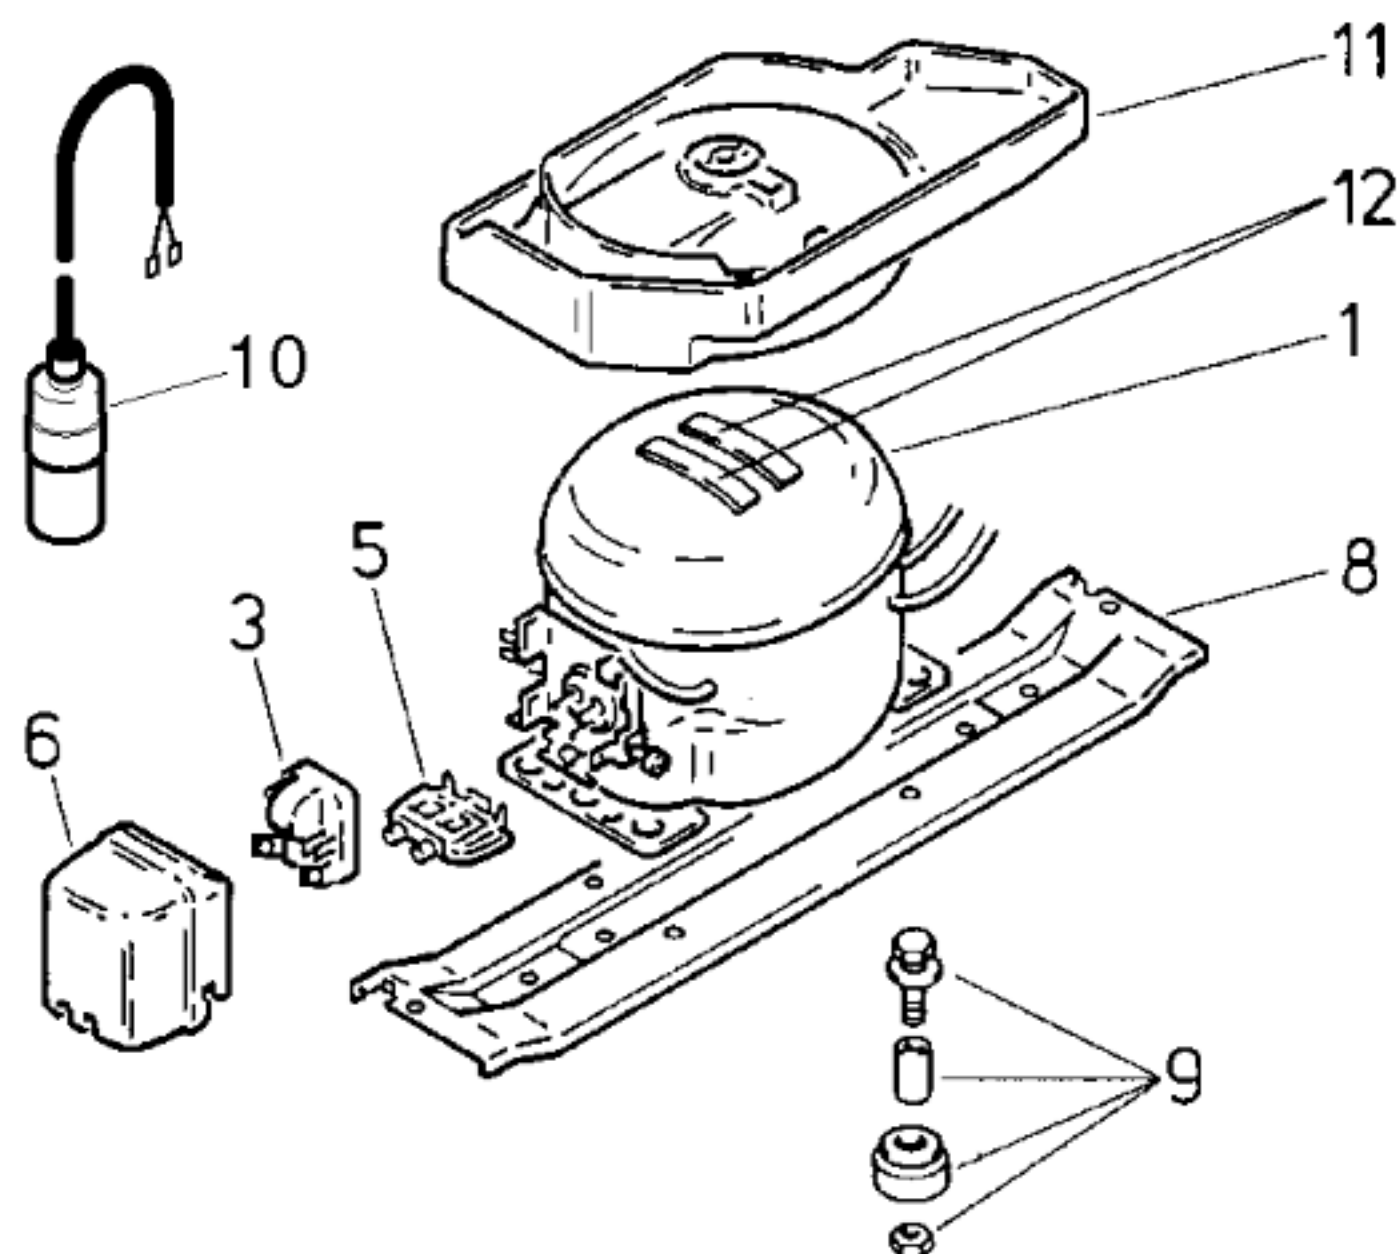

Pos.	V01,V02	V03,V04	
	Danfoss	Danfoss	
	NLE 11 K	NLE11K	
1	14 1319	14 1750	
2			
3	15 1055	15 1055	
4			
5	15 0760	15 0760	
6	15 1072	15 1072	
7			
8	11 1919	11 1919	
9	05 0166	05 0166	
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur	Danfoss		
Typ/Type	NLE 11 K		
Förderleistung/Delivery/Débit	l/h	2007	
Anlaufstrom/Starting current/Cour de démarrage	A	10,7	
Widerstand/Resistance/Résistance Ha/main/prin	Ω	12,9	
Hi/aux	Ω	18,0	

Temp.-Regler/Thermostat	Elektronisch		
Typ/Type	EIN AUS		
Regelstellung/Position			
Schaltwerte/Switching values "warm"	-14 -15		
Valeurs de commutation "kalt"	-22 -23		
"alarm"	-10 -14		

Füllmenge/Fill.quantity/Charge	R600a	siehe Typenschild	
--------------------------------	-------	-------------------	--

Anschlußwert/Conn.load/Puiss. connectée	W	120	
---	---	-----	--

Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		

Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		

Widerstand NTC-Fühler	°C	kΩ	°C	kΩ	°C	kΩ
	-1	17,3	-15	36,5	-20	48,6
	-9	26,2	-16	38,8	-23	58,1
	-14	34,5	-19	45,9	-24	61,6

Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		