

**BOSCH**


KTF1542/01-V01
 KTF1542CH/01-V02
 KTF1542/02-V03
 KTF1542CH/02-V04

KÜHL-, GEFRIERGERÄTE
 Kühlschränke, Tisch

Ident - Nummern - Konstante
 3740

Gebrauchsanweisung
 51 3637
 (D,GB,F,I,NL,S,SF,E,
 P,DK,N)
 Montageanweisung
 51 3592
 (D,GB,F,I,NL,S,SF,E,
 P,DK,N)

- 1) 01 9257
- 2) 02 0605
- 3) 02 9971
- 4) 02 9480
- 5) 02 9967
- 6) 11 9266

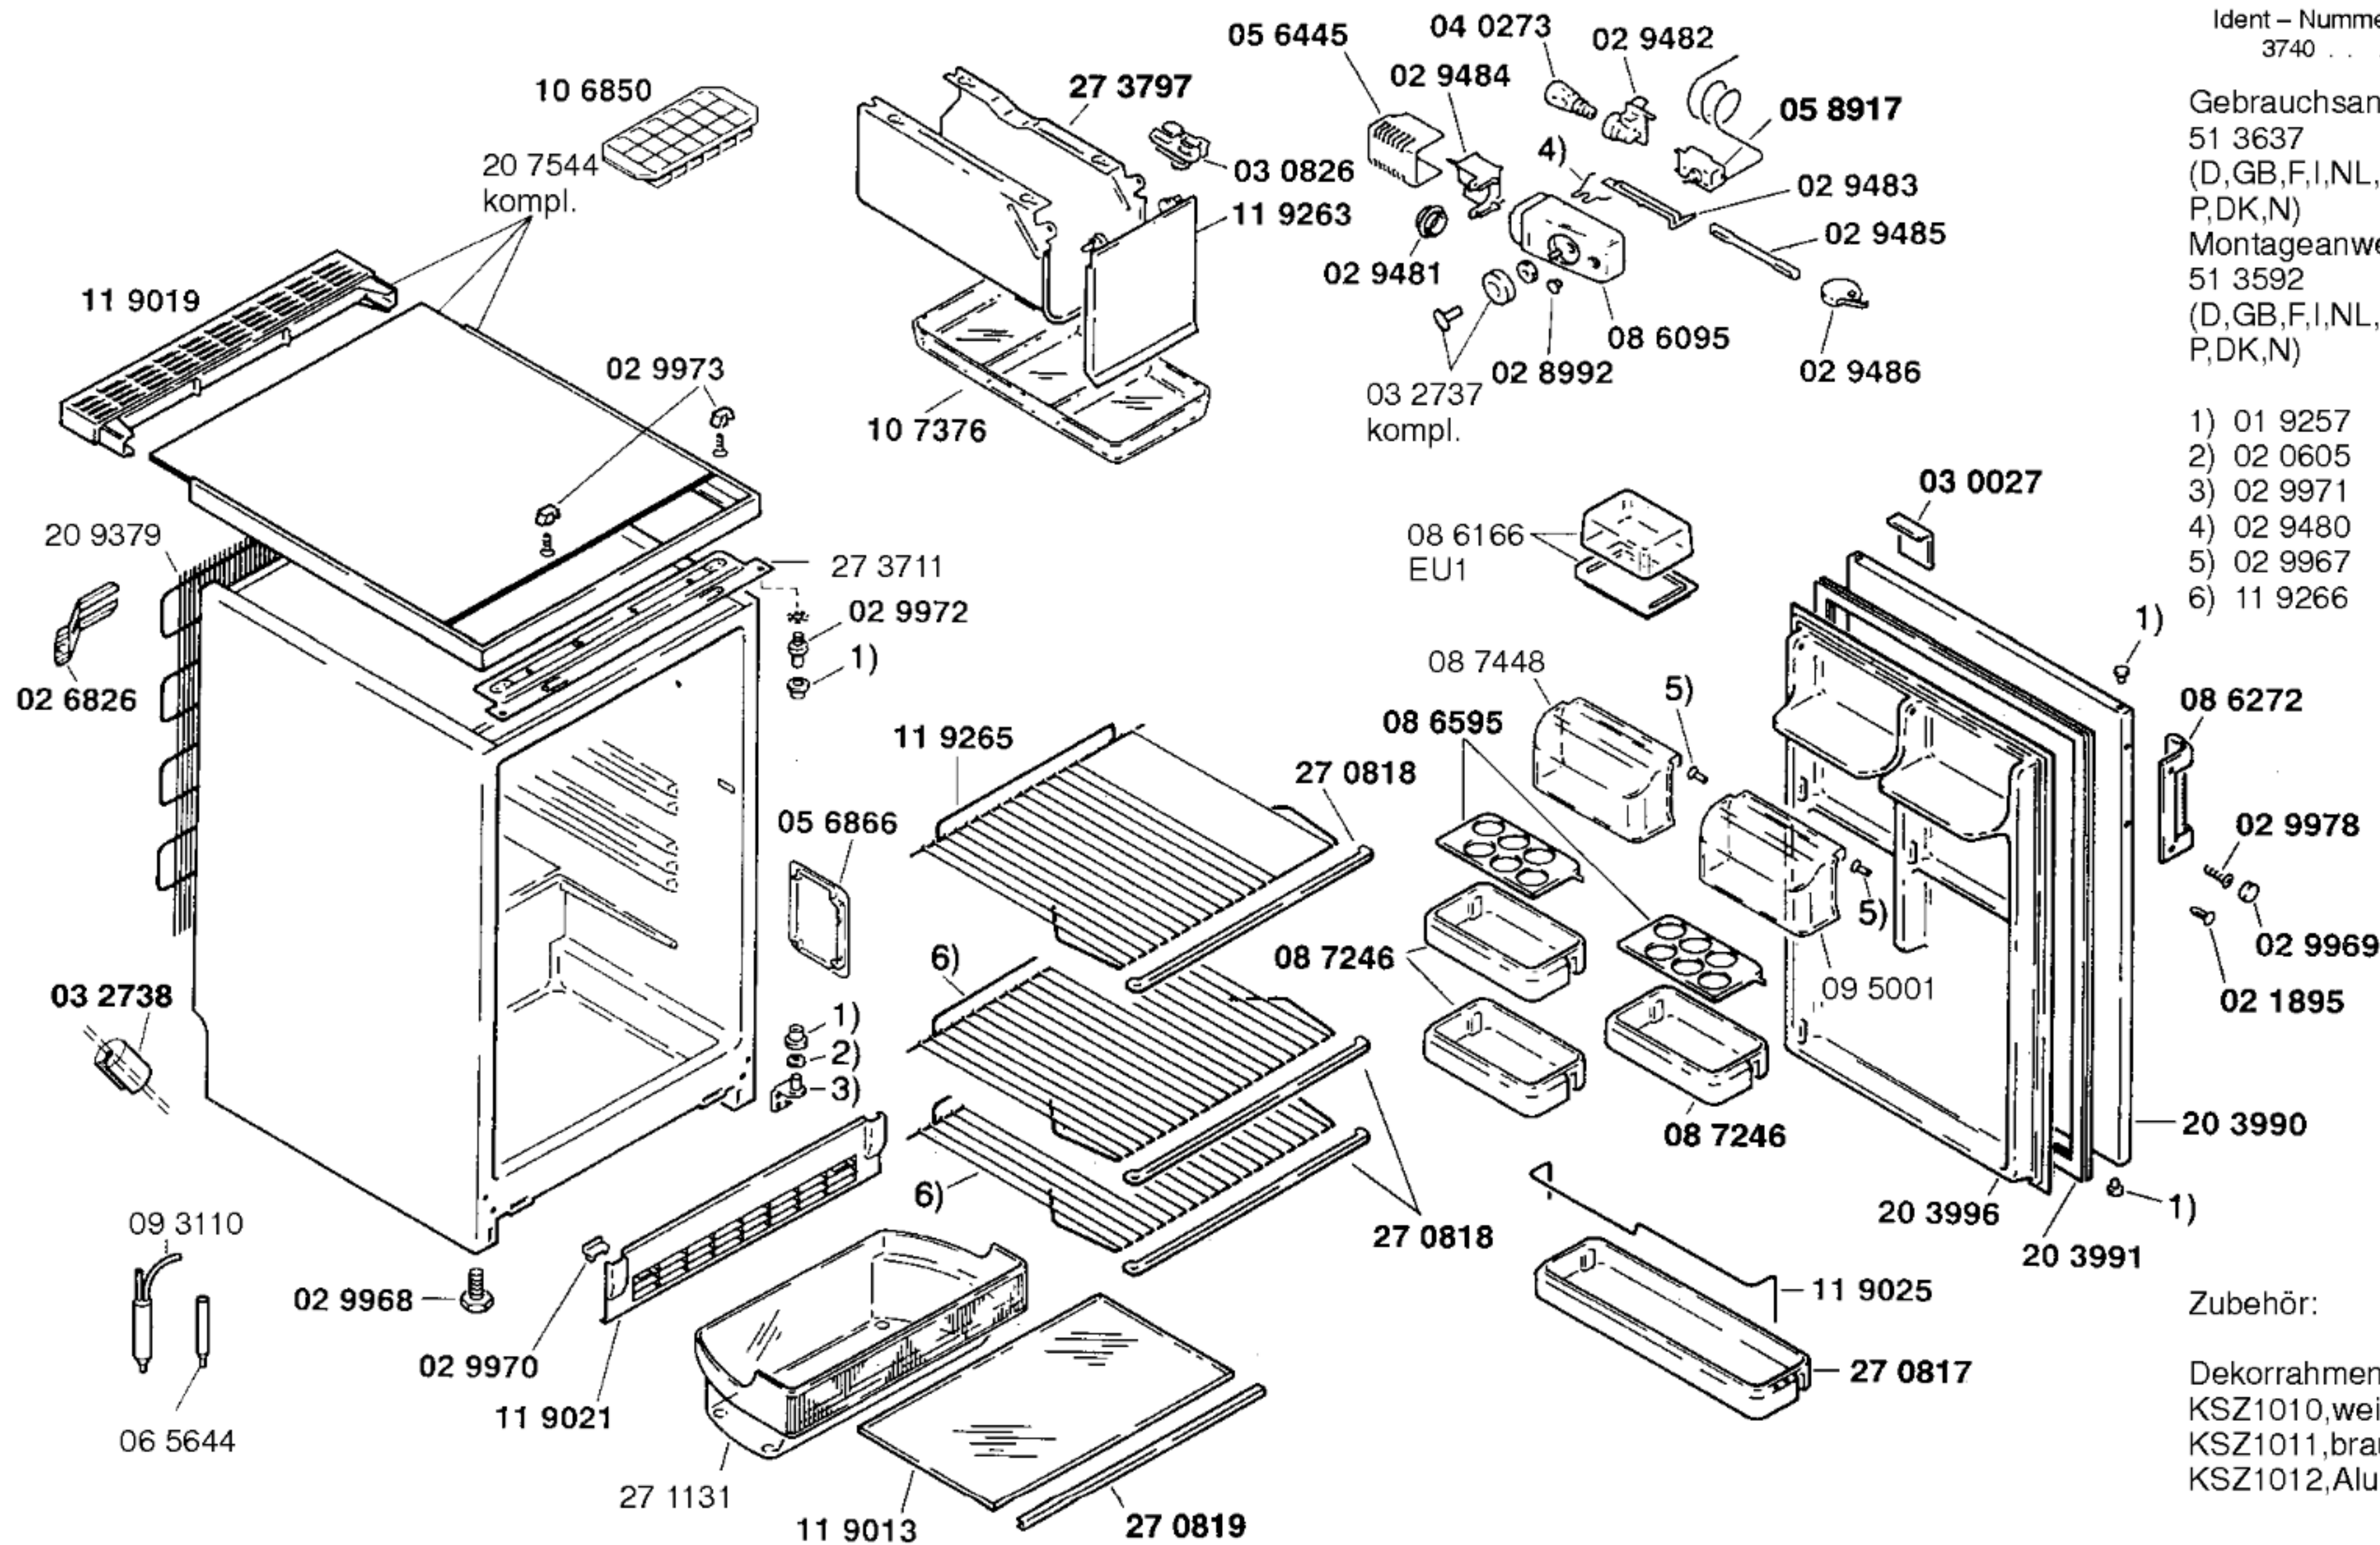

Zubehör:


Dekorrahmen
 KSZ1010, weiss
 KSZ1011, braun
 KSZ1012, Alu

**BOSCH**

KTF1542/01-V01
 KTF1542CH/01-V02
 KTF1542/02-V03
 KTF1542CH/02-V04

KÜHL-, GEFRIERGERÄTE
 Kühlschränke, Tisch

Ident – Nummern – Konstante
 3740

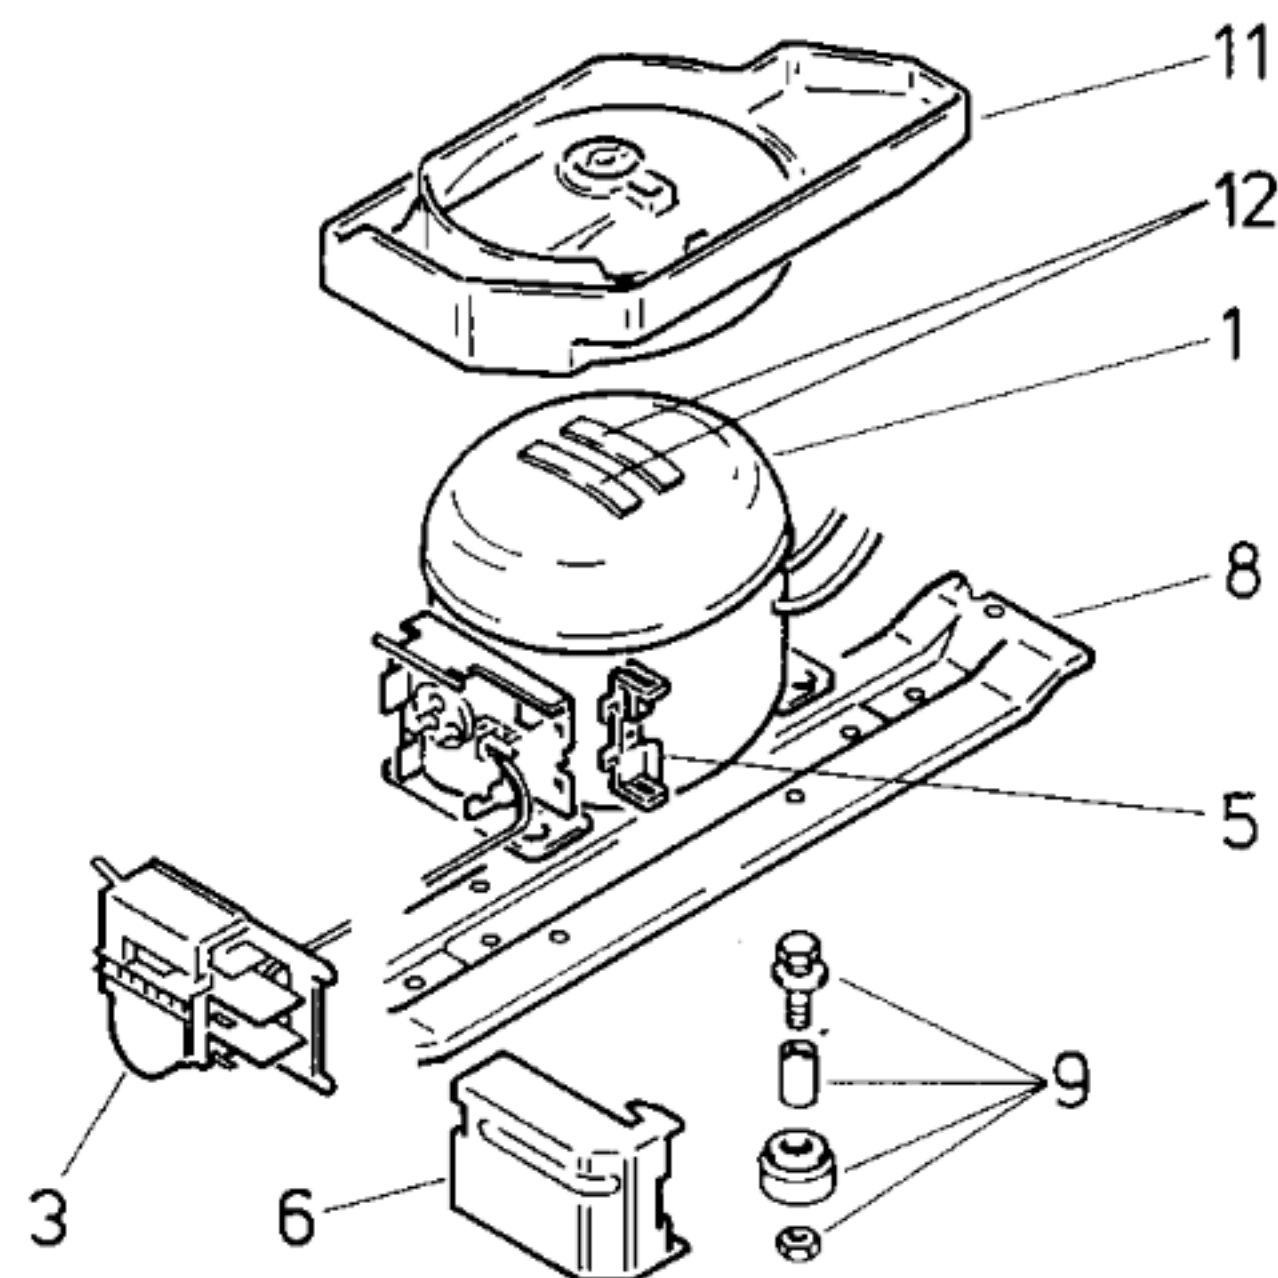

Pos.	V01,V02	V03,V04	
	Danfoss	Zanussi	
	TL 4 F	GL35AA	
1	14 1241	14 1317	
2			
3	05 9191	15 3320	
4			
5	02 1361		
6	15 1072	15 3321	
7			
8	27 0833	27 0833	
9	05 0166	05 0166	
10			
11	08 4744	08 8535	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Danfoss	Zanussi	
Typ/Type		TL4F	GL35AA	
Förderleistung/Delivery/Débit		l/h	695	612
Anlaufstrom/Starting current/Cour de démarrage		A	7,5	6,8
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	25,5	31,5
		Hi/aux Ω	16,4	33,0
Temp.-Regler/Thermostat		Danfoss		
Typ/Type		090B		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$	-10,5 -1,5	
Valeurs de commutation		„aus“	-22,5 -10,5	
		(„abtauen“ od.) „alarm“	+8,0 +8,0	
Füllmenge/Fill.quantity/Charge		R134a g	45	
Anschlußwert/Conn.load/Puiss. connectée		W	100	85
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		