


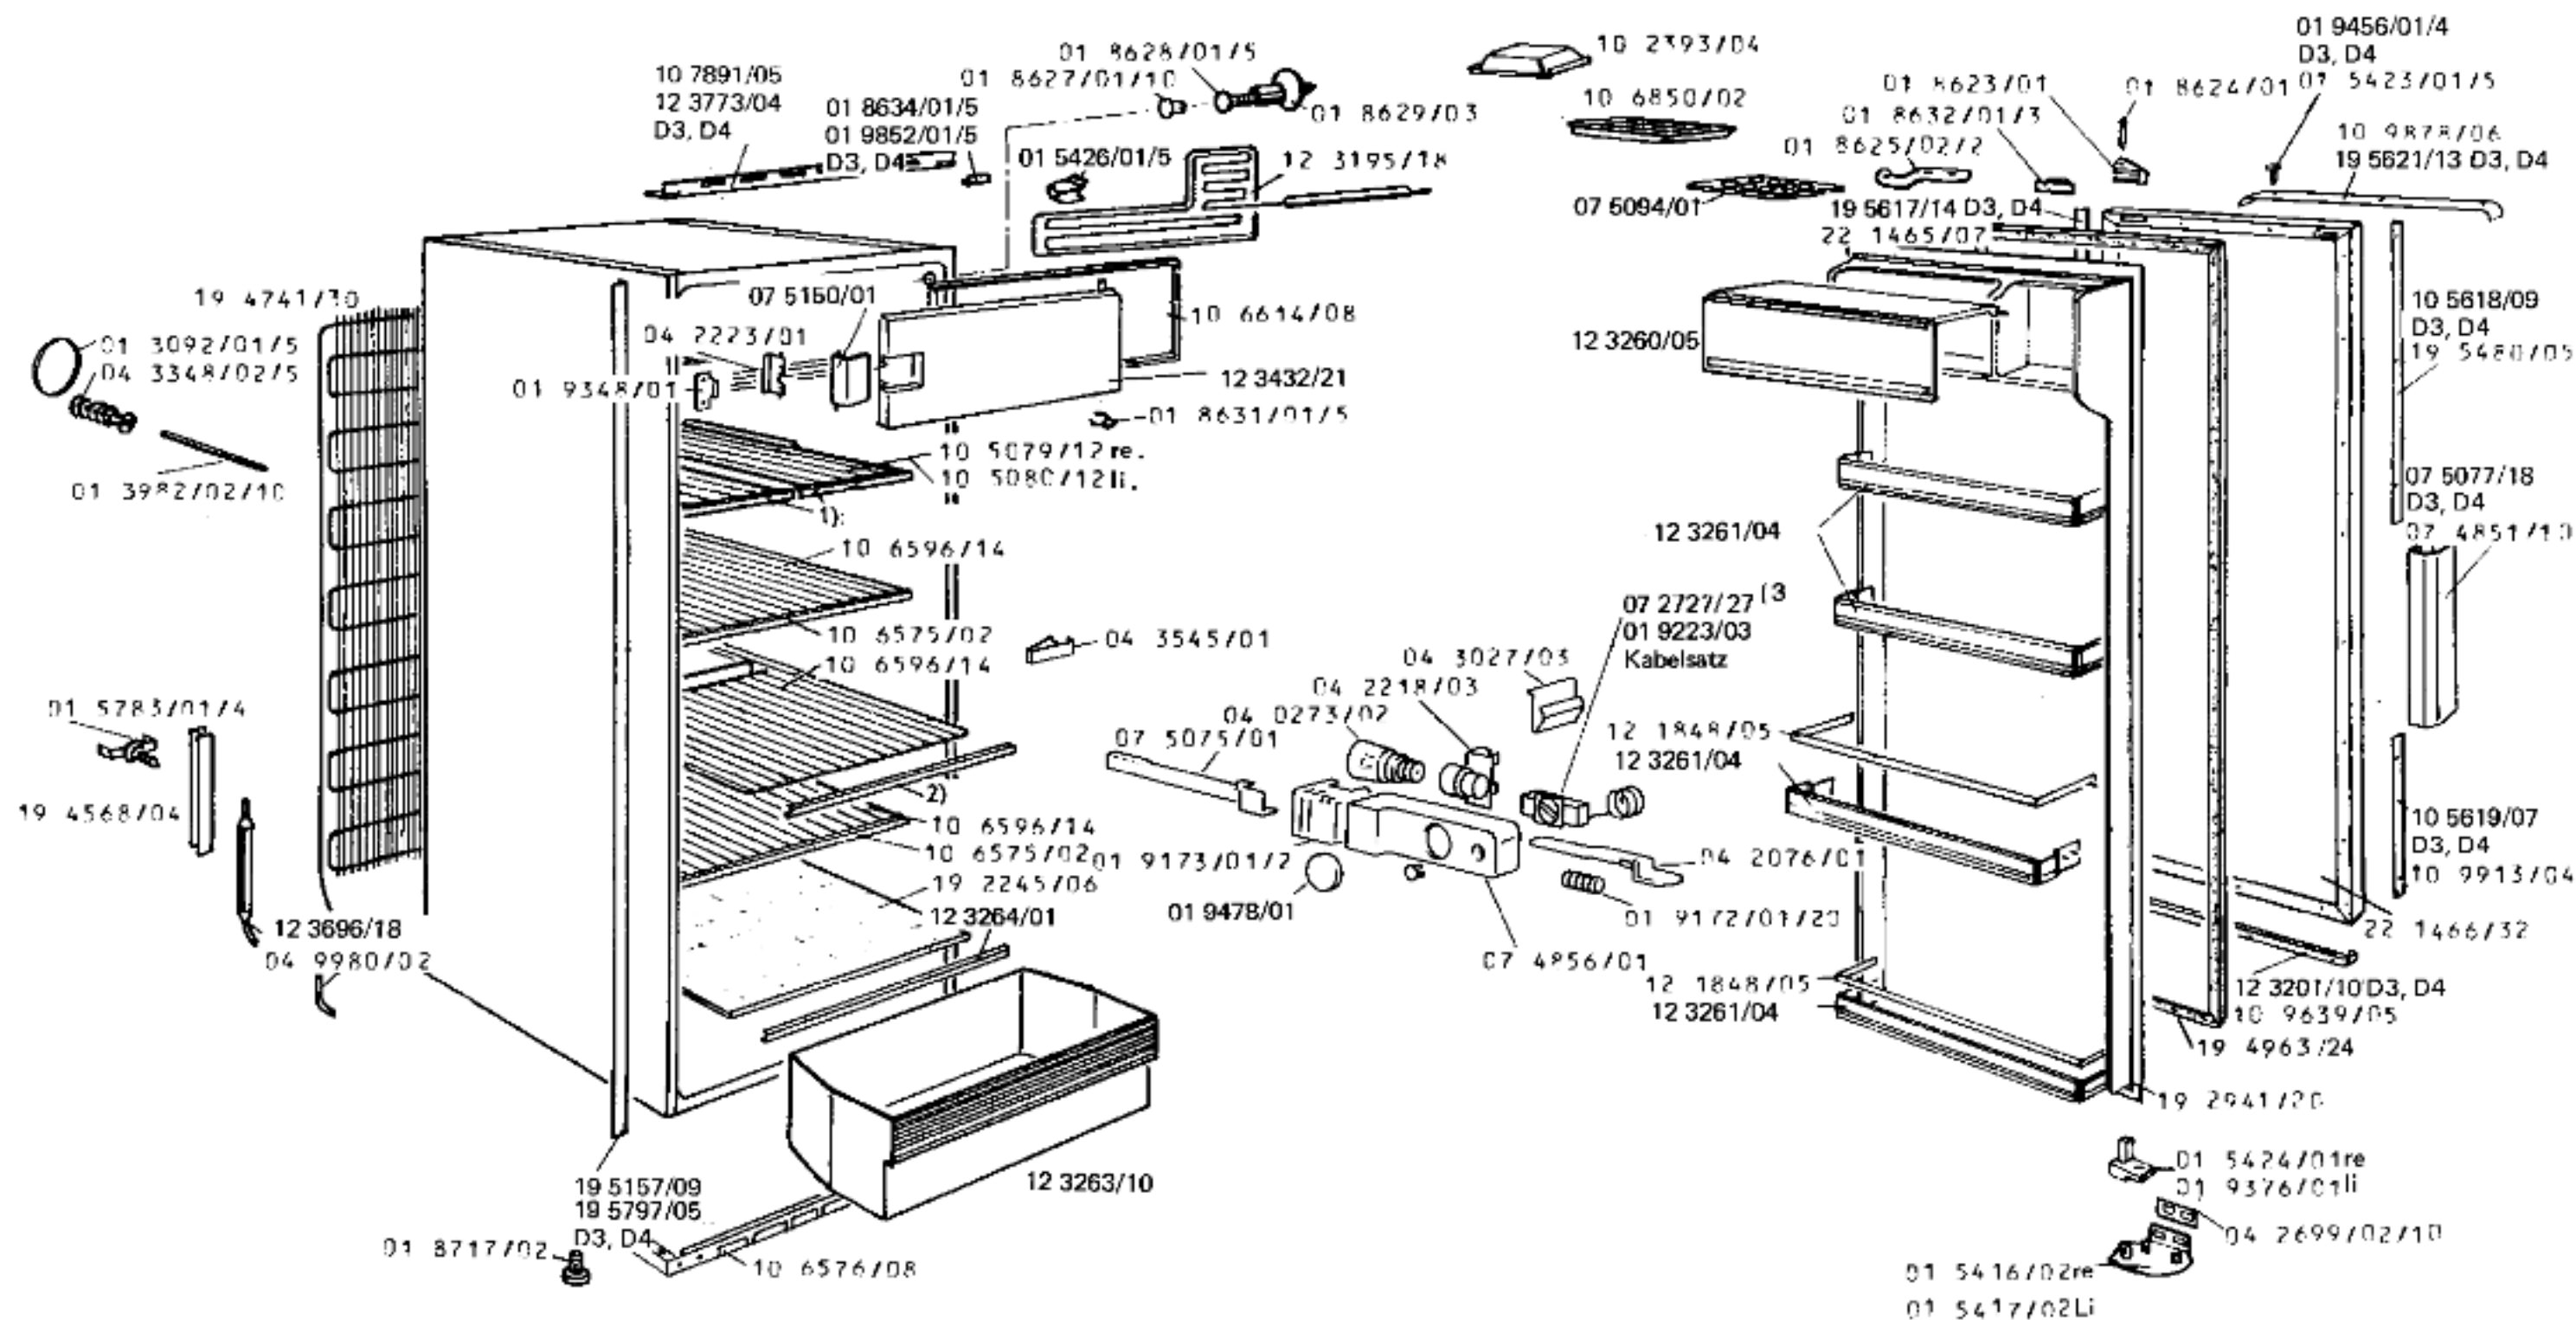

1) 12 3479/02
bis FD 825
07 5637/02
ab FD 826

2) 12 3479/02
bis FD 825
12 3662/02
ab FD 826


3) 01 9223
mitbestellen

51 0208/00
Bed.-Anleitung

**BOSCH**

KÜHLSCHRANK KS 252 ELW — 0 702 254 887—D1
 — 0 702 254 888—D2
 — 0 702 254 889—D3
 — 0 702 254 890—D4

Ident.-Nummern-Konstante
 3740

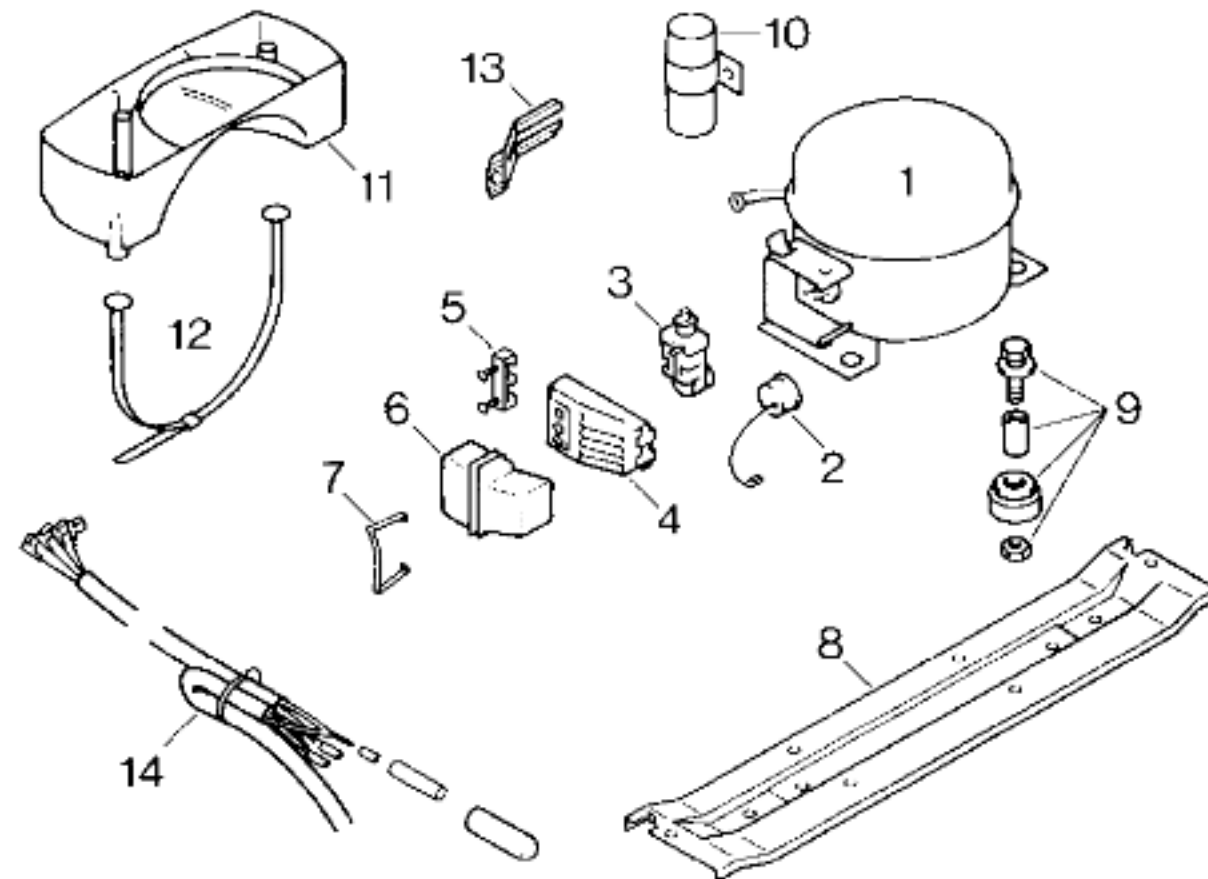

TECHNISCHE DATEN / TECHNICAL DATA / DONNÉES TECHNIQUES

Verdichter/Compressor/Compresseur		Bosch	Danfoss		
Typ/Type		V 1040	TL 5 A		
Förderleistung/Delivery/Débit		l/h	1040	920	
Anlaufstrom/Starting current/Cour. de démarrage		A	9,5	9,0	
Widerstand/Resistance/Résistance		Ha/main/prin.	Ω	15,9	15,7
		Hi/aux	Ω	29,5	18,8
Temp.-Regler/Thermostat		Ranco			
Typ/Type		A 59			
Reglerstellung/Position		kalt	warm		
Schaltwerte/Switching values/ Valeurs de commutation		„ein“	+ 4	+ 4	
		„aus“	- 29	- 20	
		(„abtauen“ od.)	„alarm“		
Füllmenge/Fill.quantity/Charge		R12	g	130	
Anschlußwert/Conn.load/Puiss. connectée		W	130		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω	3230		
Leistung/Power/Puissance		W	15		
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			

Pos.	D1 - D4 Bosch	D1 - D4 Danfoss		
1		14 0065/45		
2	07 2131/18			
3	07 2130/18	02 0108/27		
4	04 9757/02			
5		02 1361/04		
6	04 9758/02	05 1413/06		
7				
8		*11 1838/03		
9		*05 0166/05/4		
10				
11	10 6693/03	*11 1243/01		
12				
13		*04 1568/01/2		
14		*05 1226/08		

*1) Bei Ersatz des Bosch-Verdichters mitbestellen
 To be ordered when replacing the Bosch compressor
 A commander lors du remplacement du compresseur Bosch