


51 1941
D1,D2,
Gebrauchsanweisung
(D,GB,F,NL,P,SF,DK,E,S)

- 1) 02 6816
- 2) 02 6819
- 3) **02 7786**
- 4) 02 6824
- 5) **02 8793**
- 6) 02 6823
- 7) 01 8901
- 8) **05 4795**

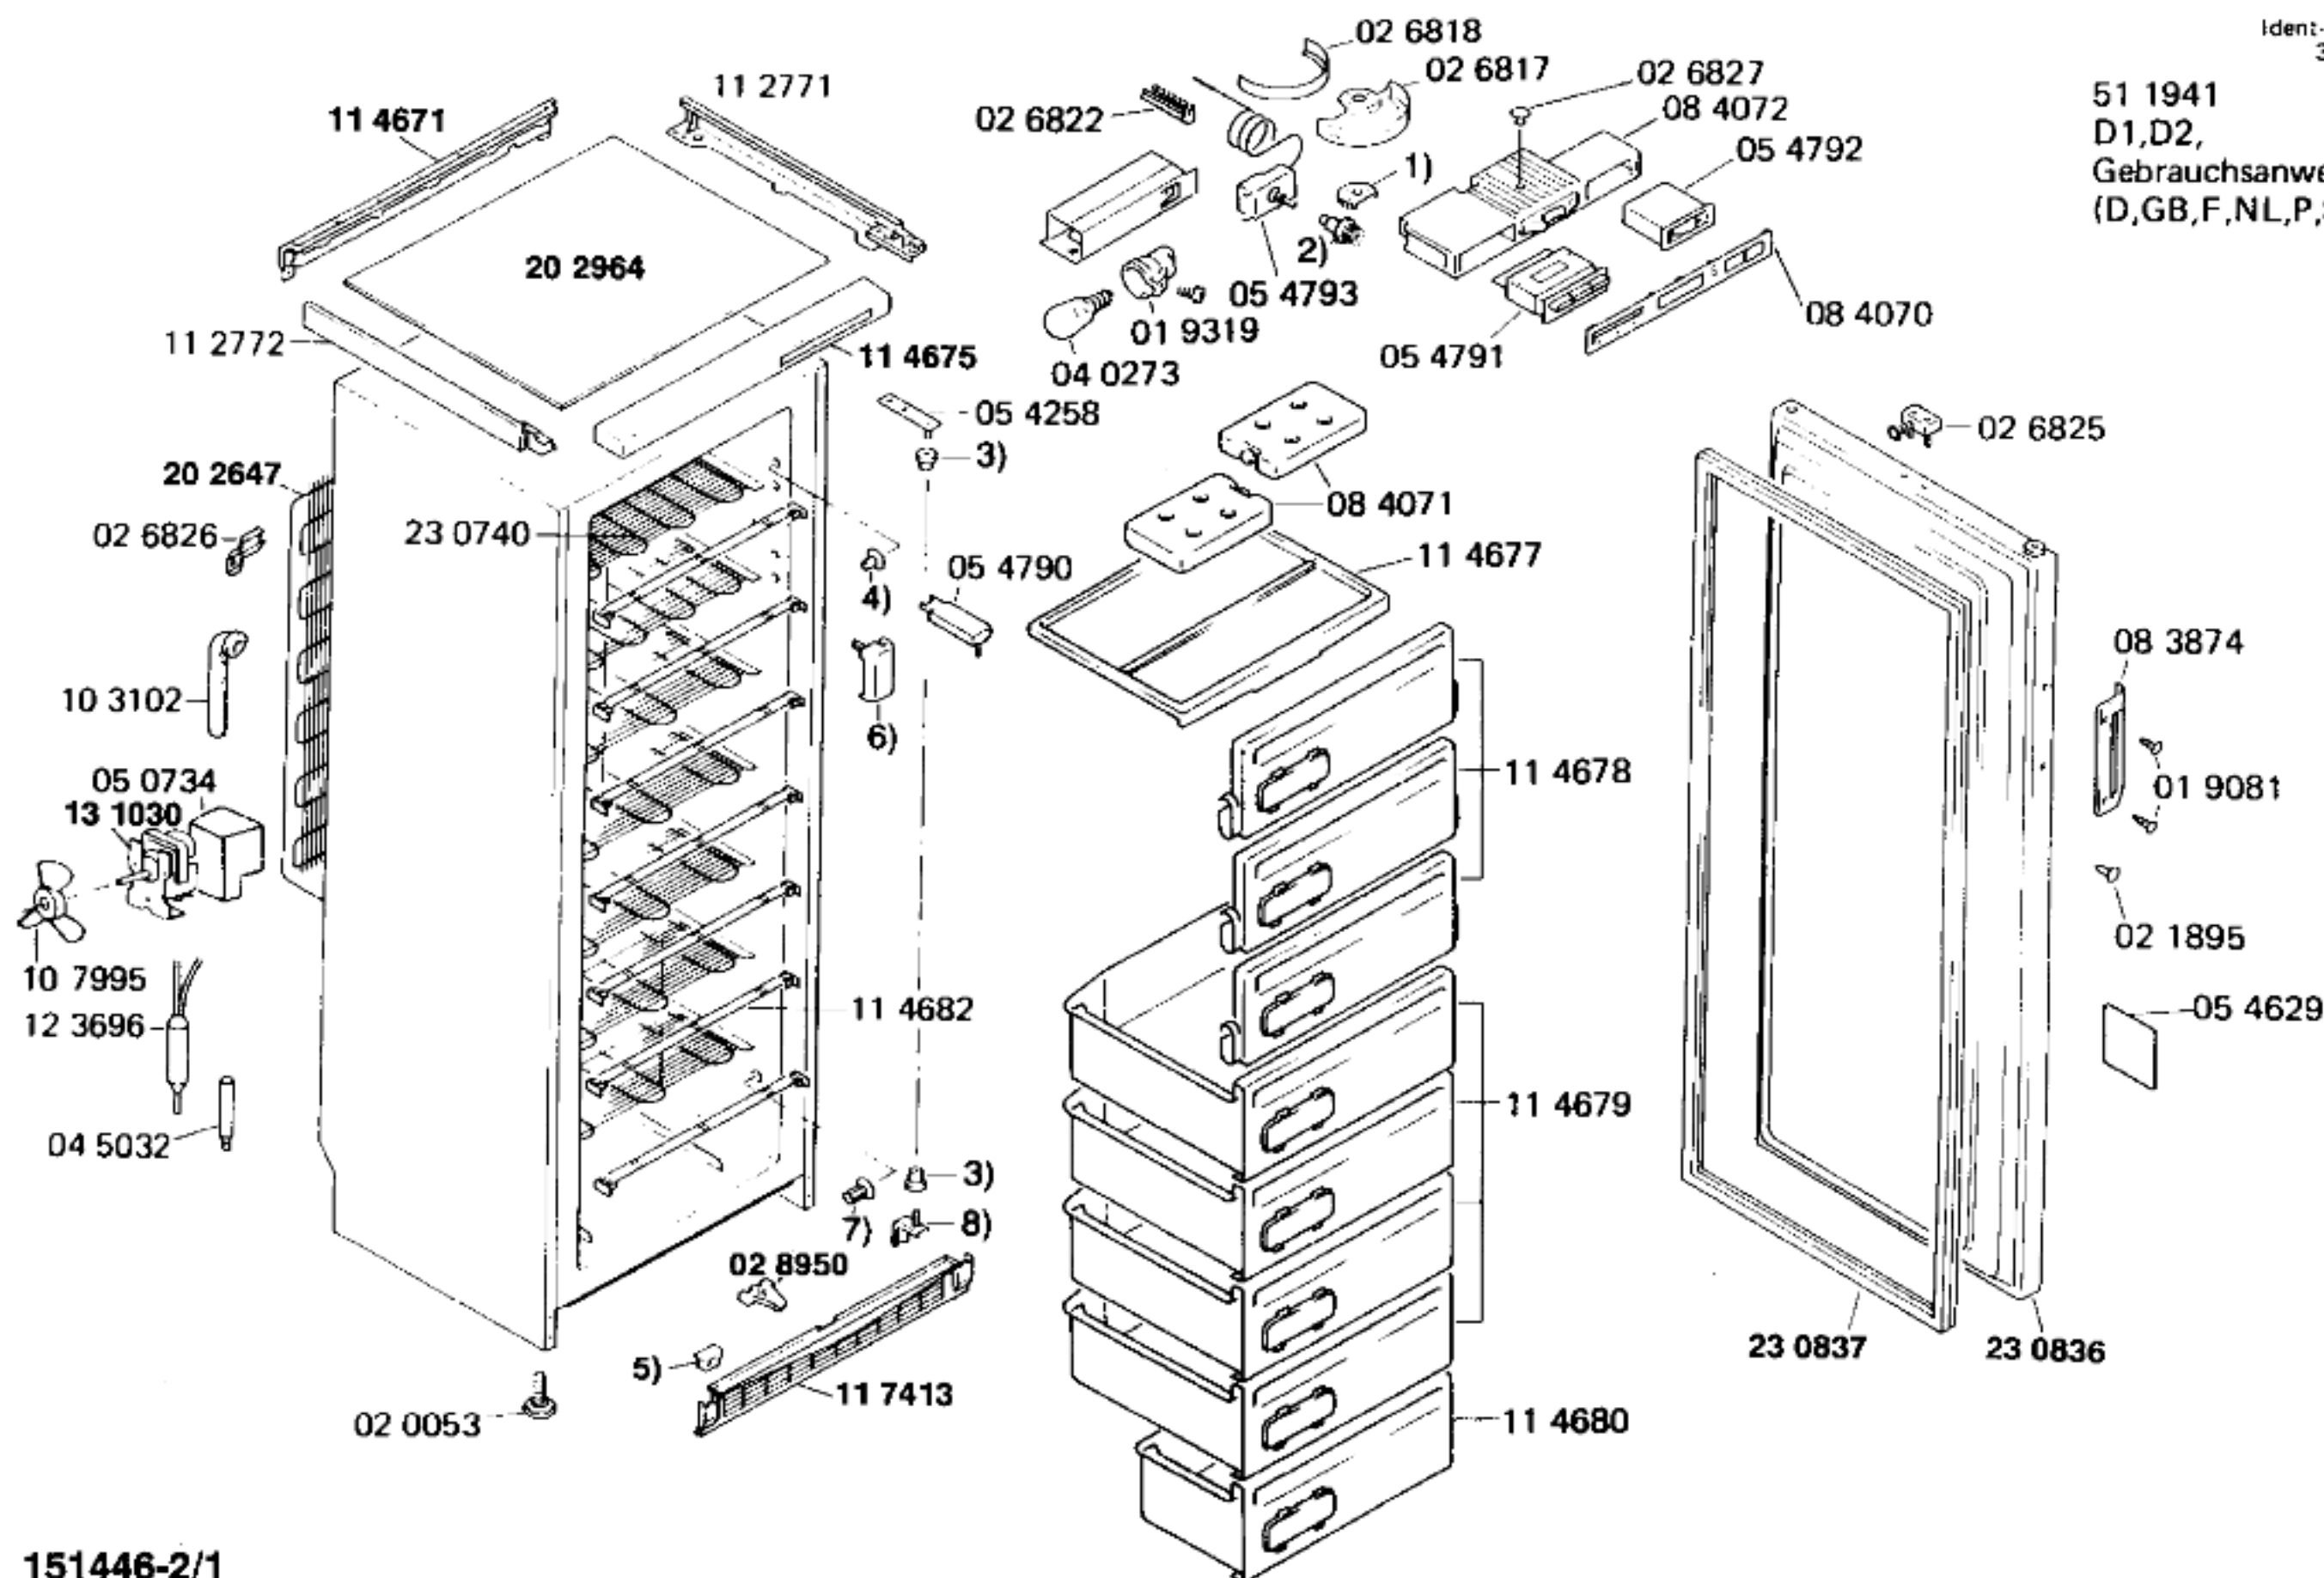


**BOSCH**

GSL 350 - 0 705 354 500-D1
 GSL 350 - 0 705 354 502-D2

GEFRIERGERÄTE
 Gefrierschränke, Stand

Ident-Nummern-Konstante
 3740

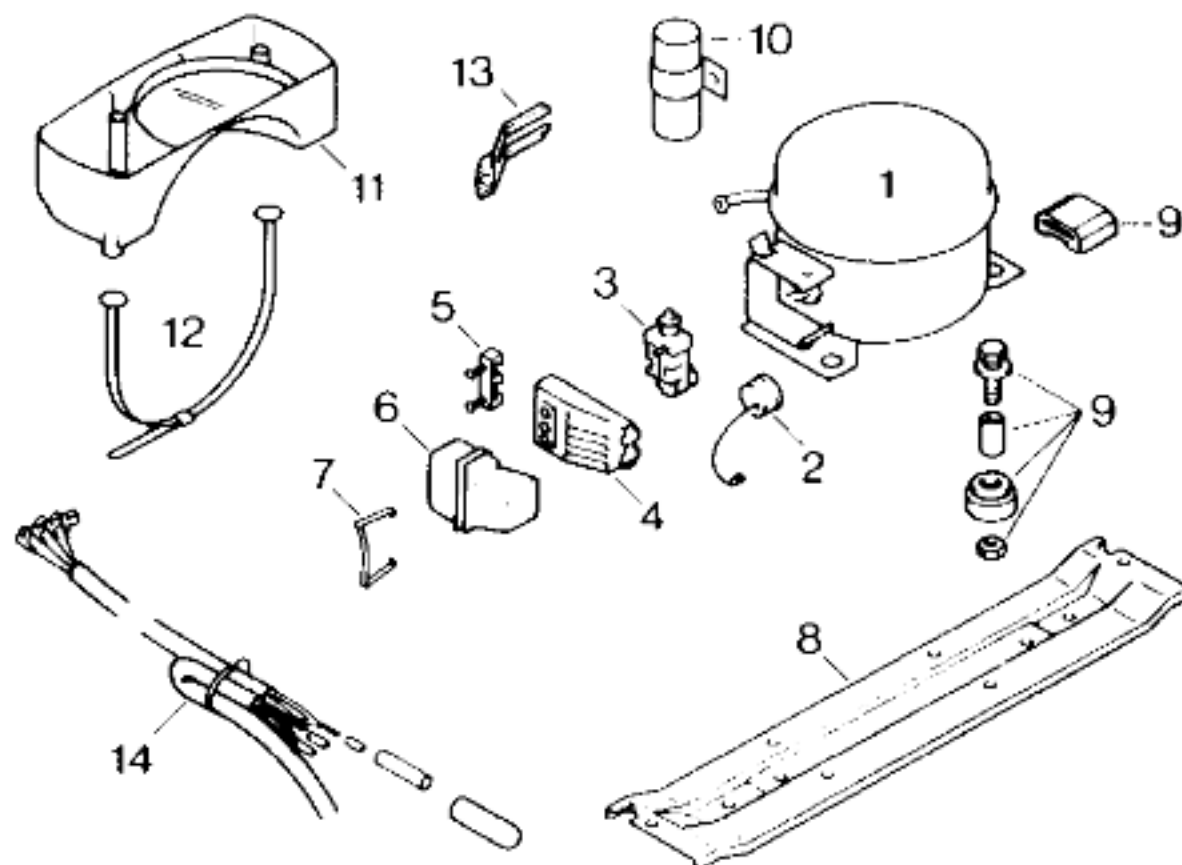

Pos.	D1	D2
	Aspera	Danfoss
1	14 0363	14 0427
2	02 7670	
3	02 2342	02 0108
4	05 1748	
5		02 1361
6	05 1746	05 1413
7	02 2339	
8		
9	05 0166	
10		
11		
12		
13		
14		

TECHNISCHE DATEN / TECHNICAL DATA / DONNÉES TECHNIQUES

Verdichter/Compressor/Compresseur		Aspera	Danfoss		
Typ/Type		BY 1118 A	FR 10 A		
Förderleistung/Delivery/Débit		l/h	1596	1629	
Anlaufstrom/Starting current/Cour. de démarrage		A	11,0	11,4	
Widerstand/Resistance/Resistance		Ha/main/prin.	9,9	10,7	
		Hi/aux	37,3	13,0	
Temp.-Regler/Thermostat		Danfoss			
Typ/Type		077 B 2054			
Reglerstellung/Position		kalt	warm		
Schaltwerte/Switching values/ Valeurs de commutation		„ein“	- 24	- 16	
		„aus“	- 34	- 24	
(„abtauen“ od.)		„alarm“	- 19	- 12	
Füllmenge/Fill quantity/Charge		R12	g	220	
Anschlußwert/Conn. load/Puiss. connectée		W	190		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω			
Leistung/Power/Puissance		W			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω	190		
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			