



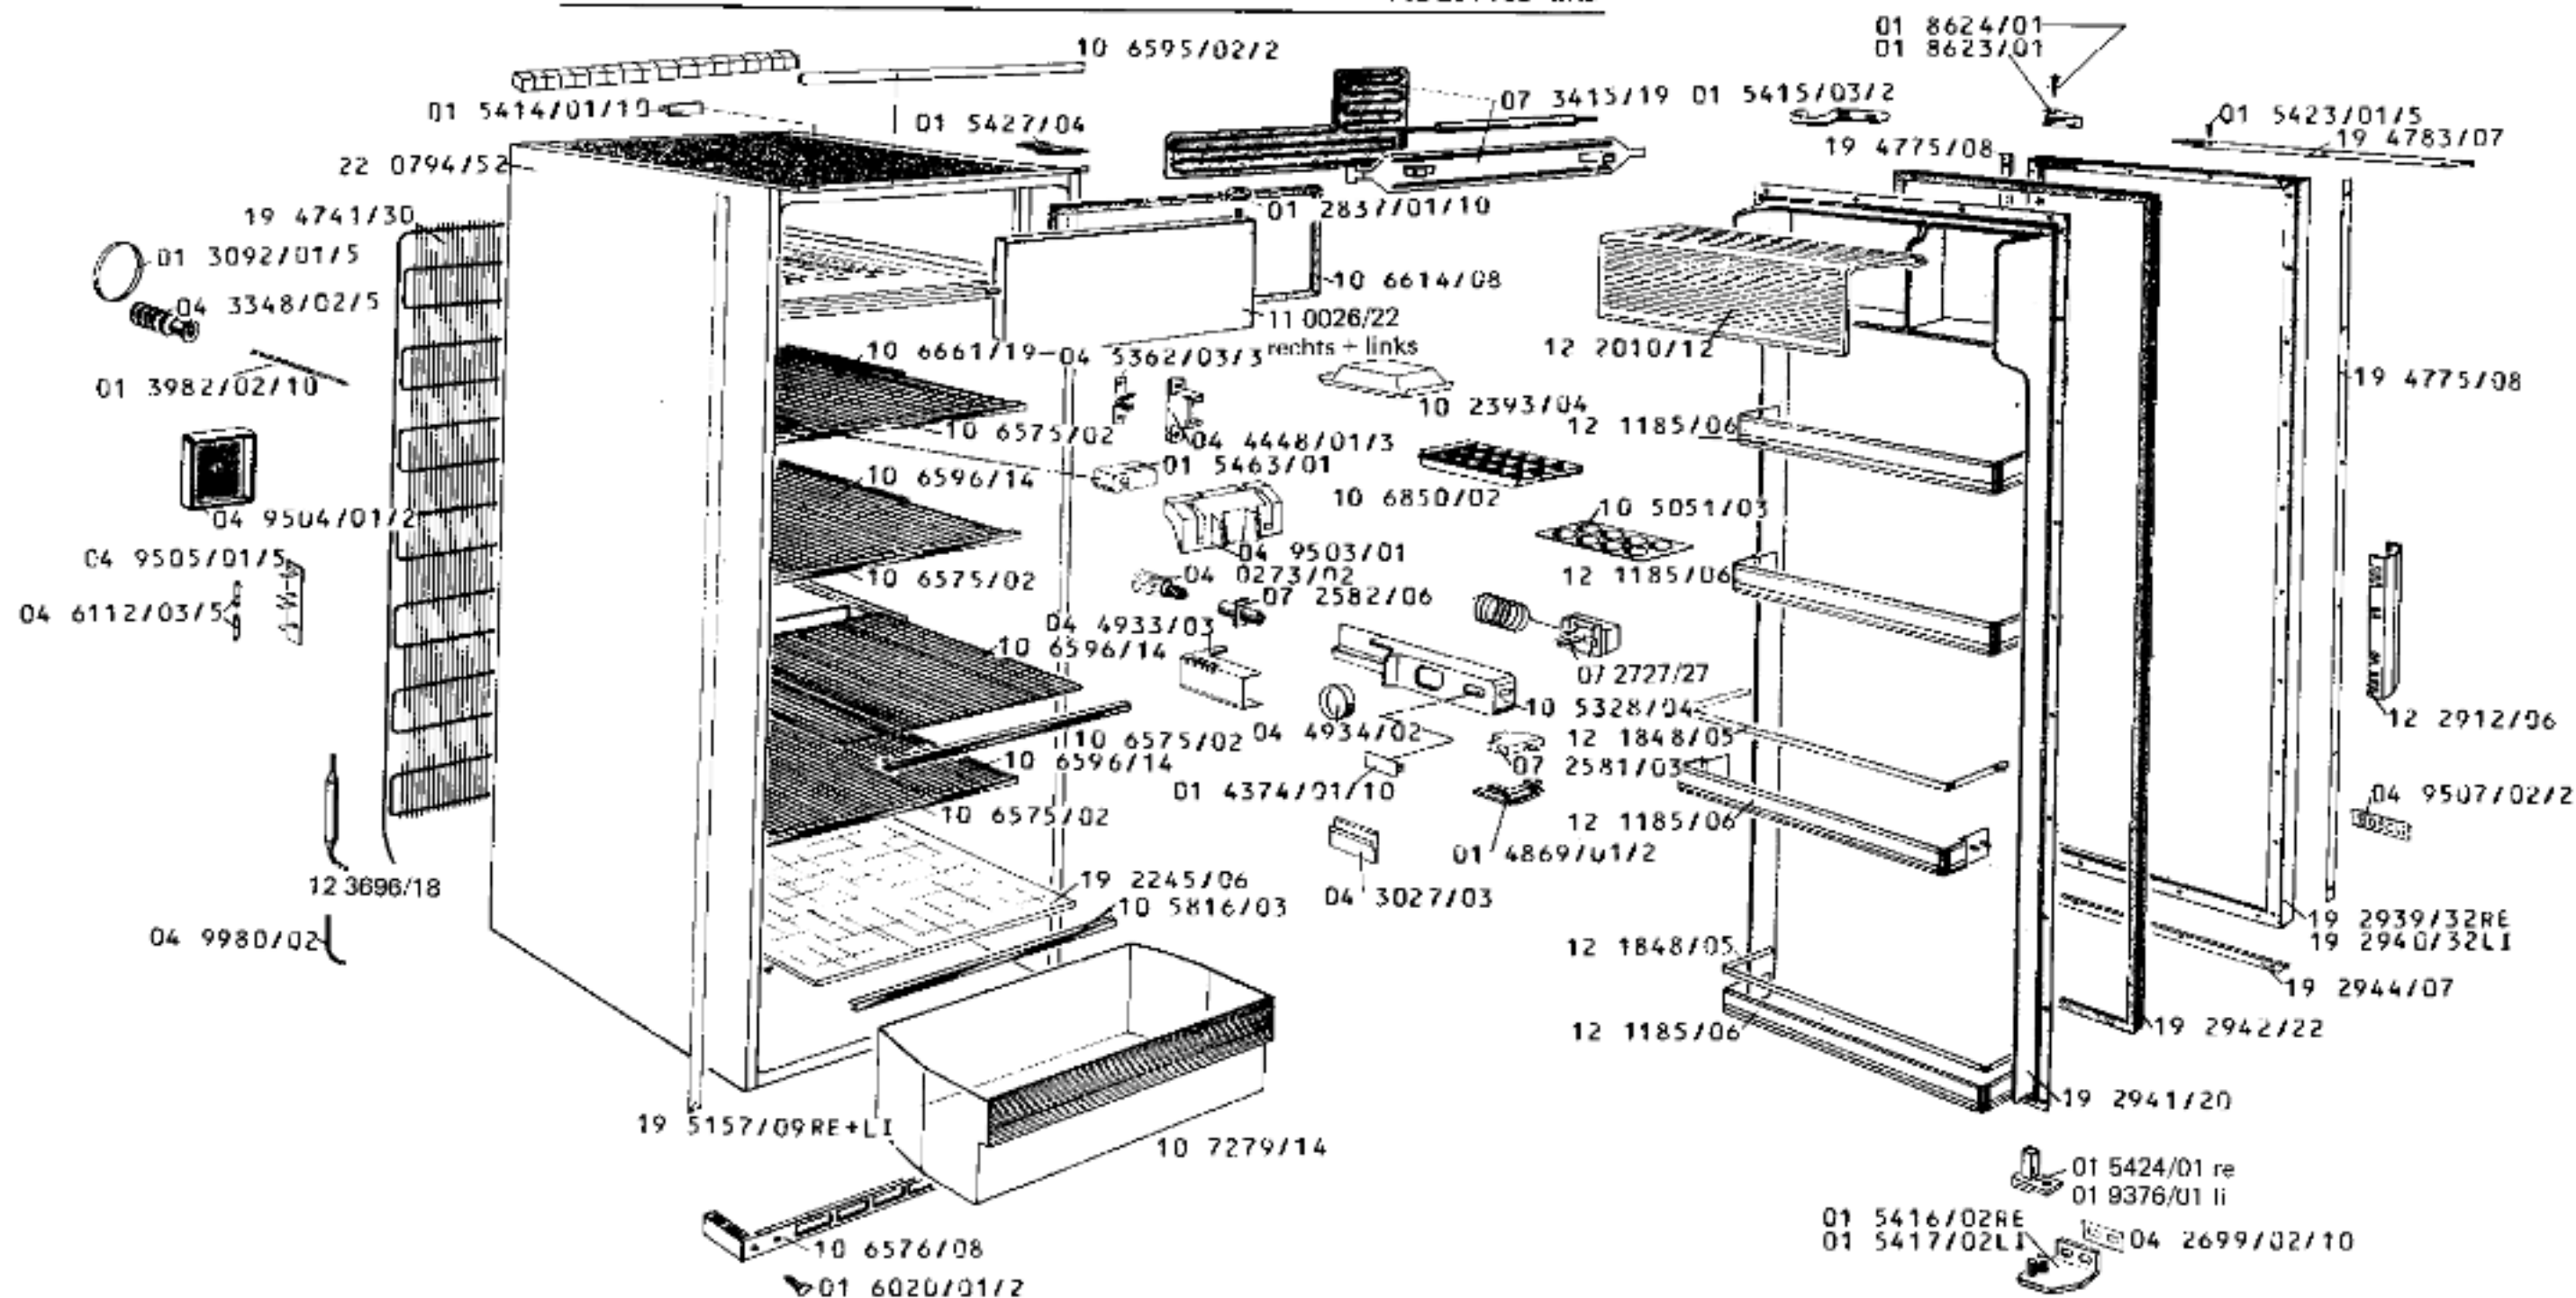

KÜHLSCHRANK KS 250 ELD	- 0 702 254 750-D1	KS 250	- 0 702 254 756-CH1
	- 0 702 254 751-D2		- 0 702 254 757-CH2
KS 242 ELD	- 0 702 254 754-F1		- 0 702 254 758-SK1
	- 0 702 254 755-F2		- 0 702 254 759-SK2

Ident. Nummern Konstante
3740 .. .

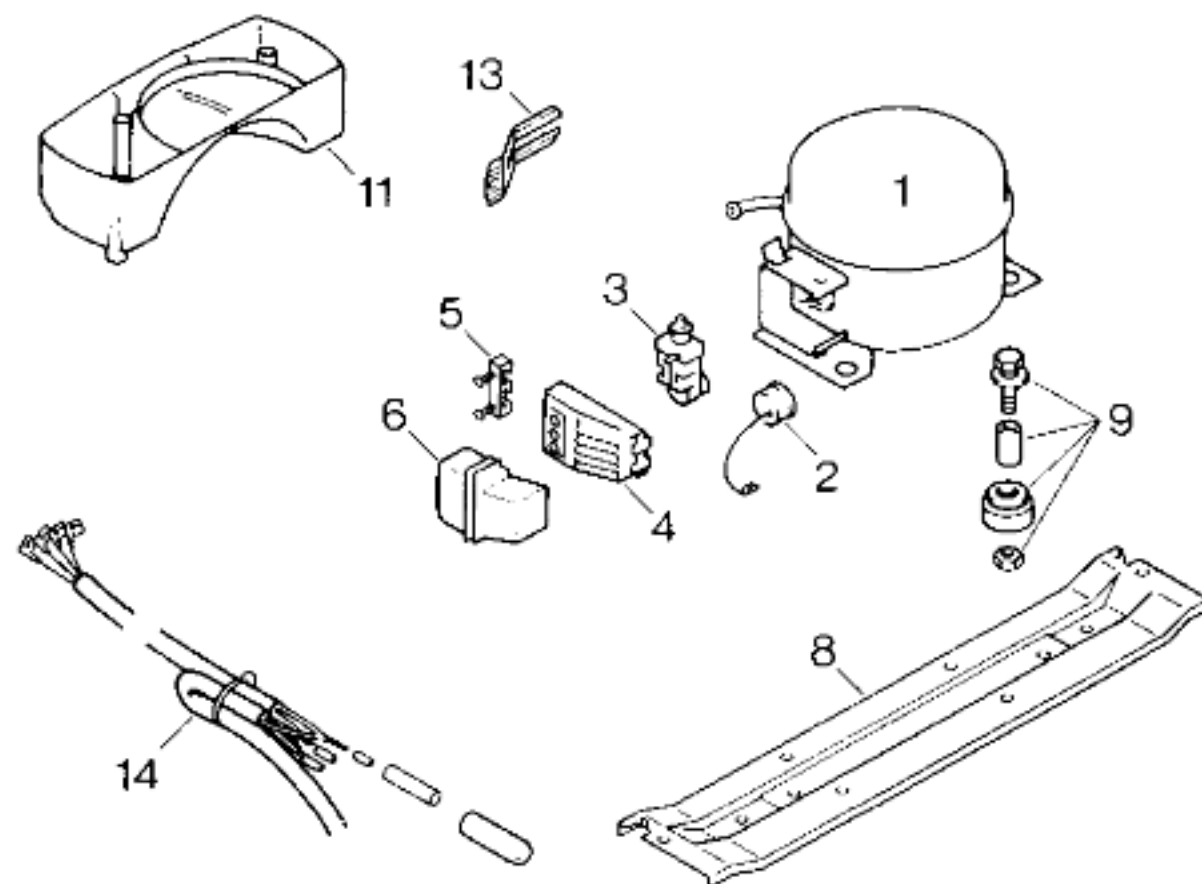

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Bosch	Danfoss		
Typ/Type		V 1040	TL 5 A		
Förderleistung/Delivery/Débit	l/h	1040	920		
Anlaufstrom/Starting current/Cour. de démarrage	A	9,5	9		
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	15,0	15,7		
	Hi/aux Ω	29,5	18,8		
Temp.-Regler/Thermostat		Ranco			
Typ/Type		A 59			
Reglerstellung/Position		kalt warm			
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	+ 4 + 4			
Valeurs de commutation	„aus“	- 29 - 20			
	(„abtauen“ od.) „alarm“				
Füllmenge/Fill.quantity/Charge	R12	g	125		
Anschlußwert/Conn.load/Puiss. connectée		W	115		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance	Ω	3230			
Leistung/Power/Puissance	W	15			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance	Ω				
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance	Ω				
Spannung/Voltage/Tension	V				

Pos.	D, F, CH, SK	D, F, CH, SK		
	Bosch	Danfoss		
1		14 0065/45		
2	07 2131/18			
3	07 2130/18	02 0108/26		
4	04 9757/02			
5		02 1361/04		
6	04 9758/02	05 1413/06		
7				
8		*11 1838/03		
9		*05 0166/05/4		
10				
11	10 6693/03	*11 1243/01		
12				
13		*04 1568/01/2		
14		*05 1226/08		

*1) Bei Ersatz des Bosch-Verdichters mitbestellen
To be ordered when replacing the Bosch compressor
A commander lors du remplacement du compresseur Bosch